Constant of the second second

Your National Source for Air Filtration

With five manufacturing facilities across the U.S. to serve you.

Glasfloss Industries – The Clear Choice Since 1936

GLASFLOSS [®] INDUSTRIES -

GDS Disposable Panel Filters

The Glasfloss GDS disposable panel filter features an innovative, reinforced, "double strut" construction for excellent durability and performance in commercial, industrial, and residential applications. The design provides 10% greater open media area than traditional metal grill filters and offers excellent dust holding capacity. In addition, the design allows for easier disposal, eliminates sharp edges for safer handling and reduces carton weight for lower shipping costs. The GDS disposable panel filter is available in 1" and 2" depths in many standard sizes.

Z-Line® Series Pleated Filters

The Z-Line[®] Series pleated filters offer improved performance for virtually every application. All Z-Line[®] filters feature fibers which do not absorb moisture and will not support microbial growth. Z-Line[®] ZL and HV filters achieve a MERV 10 rating and MR-11 filters achieve a MERV 11 rating per the ANSI/ASHRAE 52.2 Test Standard. The Z-Line[®] Series products include:

ZL - Offers excellent performance and value for a wide range of applications. HV - Ideal in high-velocity systems where maximum square footage of media is necessary. MR-11 - Provides high performance with low pressure drop for energy efficiency.

Bulk Media & Pre-Cut Pads

Glasfloss offers a variety of pre-cut pads and bulk media for prefilter or primary filter applications. Glasfloss pre-cut pads and bulk media come in a variety of fiberglass and 100% non-woven polyester grades that are designed for light to heavy dust-loading applications. Standard size pre-cut pads are packaged in a heavy-duty carton that allows quick access and keeps the media clean before installation. Service rolls are available and are packaged in an easy to use cardboard dispenser box.

Poly Rings, Sleeves & Links

Glasfloss Poly Ring filters are made with the highest quality, multiple ply, polyester media for maximum depth loading and service life. The poly ring media is thermally sealed around a heavy-duty internal wire frame to ensure maximum durability. From an air entering filter for paint booths to upgrading a lower efficient filter installation, the Poly Ring panel filter is perfect for many filtration applications. Available in links and sleeves. PR-10 and PR-20 Poly Rings are rated MERV

Z-Pak® & Z-Pak® GT Rigid Cell Filters

The Glasfloss Z-Pak® extended surface filter is designed for medium and high efficiency applications. The high density microfine fibers consistently provide high performance ratings. The Glasfloss Z-Pak® is available in box or header styles and comes in a wide variety of sizes and efficiency ranges for commercial or industrial applications. Z-Pak® filters are ideal for variable air volume systems (VAV). The Z-Pak® GT is ideal for gas turbine engine, centrifugal compressor and other high velocity applications.

Air Cleaner Replacement Filters

Glasfloss Z-Line[®] Series Air Cleaner Replacement Filters offer convenient alternatives when replacement of the original filter is necessary. The Z-Line 500AB *(Air Bear[®]), 700SG (Aprilaire[®]), 600GA (Goodman[®] and Amana[®]), 400HW (Honeywell F-100[®]) and HWR Series (Honeywell FC40R[®]) are replacement options that require no modification to the existing housing. All are rigidly constructed utilizing high quality MERV 10, MERV 11 or MERV 13 rated filtration media backed with a metal mesh to prevent sagging during operation.

Z-Line• Series Carbotron• Pleated Filters

The Z-line® Series Carbotron® pleated filter combines MERV 8 particulate filtration and carbon odor removal in a single filter unit with low pressure drop. The activated carbon used in the Carbotron® Pleat has millions of tiny openings that adsorb odorous gas molecules from the air, so clean fresh smelling air remains. The Carbotron® pleat comes in a variety of sizes to directly replace existing filters with no modification to the system.

Magna 600, 800, 900, HEPA, GT & HT Series

The Glasfloss Magna Series of rigid cell high efficiency and HEPA grade filters are designed to meet exact specifications in high efficiency systems. Available in a wide range of efficiencies, sizes, frame types and header combinations, the Glasfloss Magna Series combines state-of-the-art construction techniques with superior reliability offering maximum value. The Magna GT is ideal for gas turbine engine, centrifugal compressor and other high velocity applications. Magna HT filters are available for high temperature applications.

*(Air Bear is a registered trademark of Trion Inc.; Aprilaire is a registered trademark of Research Pro

Excel[®] & Purapak[®] Medium & High Efficiency Bag Filters

Glasfloss offers a complete line of synthetic and fiberglass extended surface media bag filters to meet a wide range of applications. Glasfloss bag filters are rigidly constructed utilizing an exclusive internal header design that provides dependable performance. Both synthetic and fiberglass bag filters are available in a wide variety of efficiencies in standard and special sizes.

Quad & Cube Polyester Filters

The Glasfloss line of polyester bag filters offers medium efficiency performance for a wide range of applications. The rigid, selfseal design of these filters helps prevent air bypass and allows the filters to operate under adverse conditions, especially where high humidity is present. Glasfloss Cube and Quad 440 filters feature a twostage media for maximum efficiency and service life. The Glasfloss Quad 420 features a single stage media and is less restrictive to airflow.

Z-Line_® Series MR-13 Pleated Filters

The Z-Line® MR-13 Series pleated air filter features the latest in media technology to achieve MERV 13 while maintaining low pressure drop and good service life. The Z-Line® Series MR-13 pleat is optimized for "LEED" compliance in new and existing buildings as well as providing a cost-effective upgrade from lower efficiency pleated filters for a variety of commercial and industrial applications. The Z-Line® Series MR-13 pleat is available in many standard face dimensions in 1", 2" and 4" depths.

Puracell. II Mini-Pleat Series

The Glasfloss Puracell[®] II Mini-Pleat Filter is ideal for use in applications where a high degree of efficiency is required in a 2" and 4" minipleat design. The Puracell[®] II offers unique advantages over traditional filters which include low cost, reduced weight and size and less impact on landfills. The Puracell[®] II fiberglass media is available in standard and special sizes in MERV 11, 13, 14 & 15 efficiencies, while Puracell[®] II-S synthetic media is available in MERV 11, 13 and 15 efficiencies. The Puracell[®] II M & MH fiber Series and M-S MH-S synthetic Series are available where heavy-duty metal frame construction is required.

Puracell. II P Mini-Pleat Series

The Glasfloss Puracell[®] II P 4" Plastic Frame Mini-Pleat Series is designed for use in applications where a high degree of efficiency is required in a 4" deep filter. The filters combine state-of-the-art minipleat construction techniques with superior eliability to offer maximum value for commercial and industrial applications. Addi-tionally, the Puracell® II P Series offers unique advantages over the traditional 12' rigid box filter including lower freight costs reduced storage area requirements and less impact on landfills. The Glasfloss Puracell® I P & PH filters incorporate fiberglass media and are available in MERV 11. 13, 14 & 15 efficiencies, and Puracell® II P-S & PH-S filters incorporate synthetic media are are available in MERV 11, 13 & 15 efficiencies.

Puracell® 5V Mini-Pleat Series

The Glasfloss Puracell 5V mini-pleat series offers HEPA grade

performance, extremely low resistance to air flow and extended

service life. The chemical resistant aluminum framework provides

exceptional strength. The Glasfloss Puracell 5V mini-pleat series

are produced in MERV 16 and 99.99% @ .30 micron size performance ranges and are available in exact or nominal standard sizes.

Puracell® VP Mini-Pleat Series

The Puracell® VP Series extended surface mini-pleat filters offer high efficiency particulate removal, extended service life and extremely low resistance to air flow. The filters incorporate a lightweight, high-impact polystyrene framework for strength and durability in demanding commercial and industrial applications. The Puracell® VP and VPX Series are available in MERV 11, 13, 14 and 15. The VP Series is also available in MERV 16 and 99.97% HEPA grade. The VP-S and VPX-S synthetic Series are available in MERV 11, 13 and 15 efficiencies. VP-GA High-Efficiency Gas Adsorber filters with activated carbon are also available.

Z-Pak® HC Series High Capacity Rigid Cell Filters

Glasfloss Z-Pak[®] HC rigid cell filters are designed for high efficiency applications and incorporate two individual filtration media layers that provide very low initial pressure drop in addition to a high dust holding capacity for superior service life. The Z-Pak[®] HC's total rigid construction makes it ideal for variable air volume systems (VAV), where changes in air flow can have an adverse effect on non-rigid type filters. Z-Pak[®] HC filters are designed to handle high airflow and are available in MERV 14 performance.

Over 87 years of Excellence

Glasfloss Industries is the oldest American owned and operated manufacturer of HVAC filters. Established in 1936, Glasfloss has grown from a small, special-size air filter fabricator in New York City to a full-line manufacturer with plants strategically located throughout the United States.

After decades of serving the air filtration industry, Glasfloss has built a worldwide reputation for quality products which provide reliable performance and superior value. Our unique ability to work with customers on special product needs and requests is the result of over 87 years of manufacturing experience and our continuing commitment to research and development.


Today with new technologies and expanding production capabilities, Glasfloss leads the industry the same way it started more than 87 years ago: by furnishing the special needs of the air filtration industry with quality products, competitive prices, and the best lead times in the industry.

From Disposable Panel Filters to HEPA filters, Glasfloss is the Clear Choice for all of your air filtration needs.



Glasfloss manufactures a variety of medium and high efficiency air filters which can be specified for LEED certification applications. For specific information on these products, please contact your local Glasfloss Sales Representative.

Five manufacturing facilities across the U.S. to serve you.

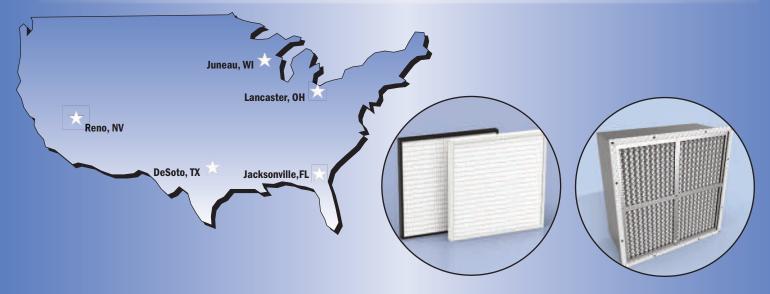



"Serving You With Locations Throughout The Nation"

CORPORATE HEADQUARTERS: 420 E. Danieldale Rd. • DeSoto, Texas 75115 (214) 741-7056 • Fax (800) 435-8377

www.glasfloss.com

Bulletin No. GBR - 1-12-2023





DISTRIBUTED BY:










GDS Disposable Panel Filters

- Progressively Dense Heavy Duty Media
- Heavy-Duty One Piece Box Frame Construction
- Thermally Bonded



The Glasfloss GDS disposable panel filter features an innovative, reinforced, "double strut" construction for excellent durability and performance in commercial, industrial, and residential applications. The design provides 10% greater open media area than traditional metal grill filters and offers excellent dust holding capacity. In addition, the design allows for easier disposal, eliminates sharp edges for safer handling and reduces carton weight for lower shipping costs. The GDS disposable panel filter is available in 1" and 2" depths in many standard sizes.

The Glasfloss GDS disposable filter shall be constructed of a heavy-duty, one piece craftboard frame. All corners shall be closed and sealed. The fiberglass filter media shall be coated with a non-toxic, non-flammable, odor free adhesive. The fiberglass media shall be constructed in a progressively dense fashion from air entering to air leaving side. The fiberglass media shall have a skin backing on the air entering and the air leaving side. The media and reinforced strut retainers shall be glued and sealed inside a heavyduty, craftboard frame. All filters shall be classified under U.L. std. 900.

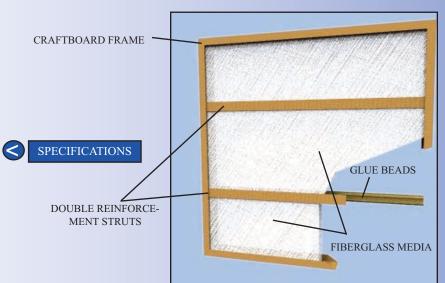

'Serving You With Locations Throughout The Nation'

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com · (214) 741-7056 PRODUCT BULLETIN 1GDS • SECTION 1 • 1/1/23



SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	INITIAL RESIST. IN. W.G.	MEDIA SQUARE FOOT	SIZE W x H x D NOMINAL MM	RATED VELOCITY M/H	INITIAL RESIST. PASCALS
10 x 10 x 1	9-5/8 x 9-5/8 x 3/4	300	0.09	0.69	254 x 254 x 25	5490	22.41
10 x 10 x 1 10 x 20 x 1	9-5/8 x 19-5/8 x 3/4	300	0.09	1.38	254 x 508 x 25	5490	22.41
10 x 24 x 1	9-5/8 x 23-5/8 x 3/4	300	0.09	1.66	254 x 610 x 25	5490	22.41
10 x 25 x 1	9-5/8 x 24-5/8 x 3/4	300	0.09	1.75	254 x 635 x 25	5490	22.41
10 x 30 x 1	9-5/8 x 29-5/8 x 3/4	300	0.09	2.08	254 x 762 x 25	5490	22.41
12 x 20 x 1	11-5/8 x 19-5/8 x 3/4	300	0.09	1.66	305 x 508 x 25	5490	22.41
12 x 24 x 1	11-5/8 x 23-5/8 x 3/4	300	0.09	2.00	305 x 610 x 25	5490	22.41
12 x 25 x 1	11-5/8 x 24-5/8 x 3/4	300	0.09	2.08	305 x 635 x 25	5490	22.41
12 x 30 x 1	11-5/8 x 29-5/8 x 3/4	300	0.09	2.50	305 x 762 x 25	5490	22.41
14 x 20 x 1	13-5/8 x 19-5/8 x 3/4	300	0.09	1.94	356 x 508 x 25	5490	22.41
14 x 25 x 1	13-5/8 x 24-5/8 x 3/4	300	0.09	2.43	356 x 635 x 25	5490	22.41
14 x 30 x 1	13-5/8 x 29-5/8 x 3/4	300	0.09	2.91	356 x 762 x 25	5490	22.41
15 x 20 x 1	14-5/8 x 19-5/8 x 3/4	300	0.09	2.08	381 x 508 x 25	5490	22.41
15 x 30-5/8 x 1	14-5/8 x 30-1/4 x 3/4	300	0.09	3.19	381 x 778 x 25	5490	22.41
16 x 16 x 1	15-5/8 x 15-5/8 x 3/4	300	0.09	1.77	406 x 406 x 25	5490	22.41
16 x 20 x 1	15-5/8 x 19-5/8 x 3/4	300	0.09	2.22	406 x 508 x 25	5490	22.41
16 x 25 x 1	15-5/8 x 24-5/8 x 3/4	300	0.09	2.47	406 x 635 x 25	5490	22.41
18 x 25 x 1	17-5/8 x 24-5/8 x 3/4	300	0.09	3.13	457 x 635 x 25	5490	22.41
20 x 20 x 1	19-5/8 x 19-5/8 x 3/4	300	0.09	2.77	508 x 508 x 25	5490	22.41
20 x 25 x 1	19-5/8 x 24-5/8 x 3/4	300	0.09	3.47	508 x 635 x 25	5490	22.41
22 x 22 x 1	21-5/8 x 21-5/8 x 3/4	300	0.09	3.36	559 x 559 x 25	5490	22.41
24 x 24 x 1	23-5/8 x 23-5/8 x 3/4	300	0.09	4.00	610 x 610 x 25	5490	22.41
25 x 25 x 1	24-5/8 x 24-5/8 x 3/4	300	0.09	4.34	635 x 635 x 25	5490	22.41
8 x 30 x 1	7-5/8 x 29-5/8 x 3/4	300	0.09	1.66	203 x 762 x 25	5490	22.41
12 x 12 x 1	11-5/8 x 11-5/8 x 3/4	300	0.09	1.00	305 x 305 x 25	5490	22.41
12 x 16 x 1	11-5/8 x 15-5/8 x 3/4	300	0.09	1.33	305 x 406 x 25	5490	22.41
12 x 18 x 1	11-5/8 x 17-5/8 x 3/4	300	0.09	1.50	305 x 457 x 25	5490	22.41
12 x 36 x 1	11-5/8 x 35-5/8 x 3/4	300	0.09	3.00	305 x 914 x 25	5490	22.41
14 x 14 x 1	13 5/8 x 13 5/8 x 3/4	300	0.09	1.36	356 x 356 x 25	5490	22.41
14 x 18 x 1	13-5/8 x 17-5/8 x 3/4	300	0.09	1.75	356 x 457 x 25	5490	22.41
14 x 24 x 1	13-5/8 x 23-5/8 x 3/4	300	0.09	2.33	356 x 610 x 25	5490	22.41
15 x 25 x 1	14-5/8 x 24-5/8 x 3/4	300	0.09	2.60	381 x 635 x 25	5490	22.41
15 x 30 x 1	14-5/8 x 29-5/8 x 3/4	300	0.09	3.12	381 x 762 x 25	5490	22.41
16 x 18 x 1	15-5/8 x 17-5/8 x 3/4	300	0.09	2.00	406 x 457 x 25	5490	22.41
16 x 24 x 1	15-5/8 x 23-5/8 x 3/4	300	0.09	2.67	406 x 610 x 25	5490	22.41
16 x 30 x 1	15-5/8 x 29-5/8 x 3/4	300	0.09	3.33	406 x 762 x 25	5490	22.41
18 x 18 x 1	17-5/8 x 17-5/8 x 3/4	300	0.09	2.25	457 x 457 x 25	5490	22.41
18 x 20 x 1	17-5/8 x 19-5/8 x 3/4	300	0.09	2.50	457 x 508 x 25	5490	22.41
18 x 24 x 1	17-5/8 x 23-5/8 x 3/4	300	0.09	3.00	457 x 610 x 25	5490	22.41
$18 \times 30 \times 1$	17-5/8 x 29-5/8 x 3/4	300	0.09	3.75	457 x 762 x 25	5490	22.41
$20 \times 22 - 1/4 \times 1$	19-5/8 x 21-7/8 x 3/4	300	0.09	3.09	508 x 565 x 25	5490 5400	22.41
20 x 24 x 1 20 x 20 x 1	19-5/8 x 23-5/8 x 3/4	300	0.09	3.33	508 x 610 x 25	5490 5490	22.41
$20 \times 30 \times 1$	19-5/8 x 29-5/8 x 3/4	300	0.09	4.17	508 x 762 x 25		22.41
24 x 30 x 1	23-5/8 x 29-5/8 x 3/4	300	0.09	5.00	610 x 762 x 25	5490	22.41

1" Performance Data

Tolerances shall be +/- 1/8" for height and width. All special sizes will be undersized 1/8" unless specified otherwise. Recommended final resistance is 0.50" in. w. g.

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.


www.glasfloss.com · (214) 741-7056



2" Performance Data

SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	INITIAL RESIST. IN. W.G.	MEDIA SQUARE FOOT	SIZE W x H x D NOMINAL MM	RATED VELOCITY M/H	INITIAL RESIST. PASCALS
10 x 20 x 2	9-5/8 x 19-5/8 x 1-5/8	500	0.28	1.38	254 x 508 x 51	9150	69.74
12 x 24 x 2	11-3/8 x 23-3/8 x 1-5/8	500	0.28	2.00	305 x 610 x 51	9150	69.74
14 x 20 x 2	13-5/8 x 19-5/8 x 1-5/8	500	0.28	1.94	356 x 508 x 51	9150	69.74
14 x 25 x 2	13-5/8 x 24-5/8 x 1-5/8	500	0.28	2.43	356 x 635 x 51	9150	69.74
15 x 20 x 2	14-5/8 x 19-5/8 x 1-5/8	500	0.28	2.08	381 x 508 x 51	9150	69.74
16 x 16 x 2	15-5/8 x 15-5/8 x 1-5/8	500	0.28	1.78	406 x 407 x 51	9150	69.74
16 x 20 x 2	15-5/8 x 19-5/8 x 1-5/8	500	0.28	2.22	406 x 508 x 51	9150	69.74
16 x 24 x 2	15-5/8 x 23-5/8 x 1-5/8	500	0.28	2.67	406 x 610 x 51	9150	69.74
16 x 25 x 2	15-5/8 x 24-5/8 x 1-5/8	500	0.28	2.77	406 x 635 x 51	9150	69.74
18 x 24 x 2	17-5/8 x 23-5/8 x 1-5/8	500	0.28	3.00	457 x 610 x 51	9150	69.74
20 x 20 x 2	19-5/8 x 19-5/8 x 1-5/8	500	0.28	2.77	508 x 508 x 51	9150	69.74
20 x 24 x 2	19-3/8 x 23-3/8 x 1-5/8	500	0.28	3.33	508 x 610 x 51	9150	69.74
20 x 25 x 2	19-5/8 x 24-5/8 x 1-5/8	500	0.28	3.47	508 x 635 x 51	9150	69.74
24 x 24 x 2	23-3/8 x 23-3/8 x 1-5/8	500	0.28	4.00	610 x 610 x 51	9150	69.74
25 x 25 x 2	24-5/8 x 24-5/8 x 1-5/8	500	0.28	4.34	635 x 635 x 51	9150	69.74

Tolerances shall be +/- 1/8" for height and width. All special sizes will be undersized 1/8" unless specified otherwise. Recommended final resistance is 0.50" in. w. g.

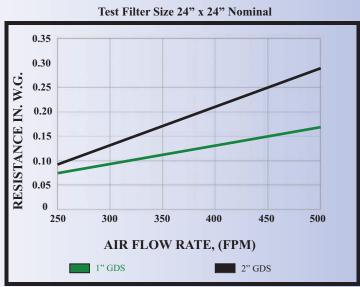


STANDARD PRESSURE DROP

"Serving You With Locations Throughout The Nation"




GDS Series Features

The Glasfloss GDS disposable panel filter features an innovative, reinforced, "double strut" construction for excellent durability and performance in commercial, industrial, and residential applications. The design provides 10% greater open media area than traditional metal grill filters and offers excellent dust holding capacity. In addition, the design allows for easier disposal, eliminates sharp edges for safer handling and reduces carton weight for lower shipping costs. The GDS disposable panel filter is available in 1" and 2" depths in many standard sizes.







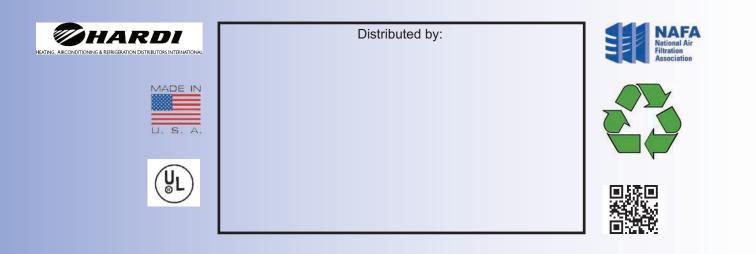

"Serving You With Locations Throughout The Nation"







Glasfloss offers a variety of pre-cut pads and bulk media for pre-filter or primary filter applications. Glasfloss pre-cut pads and bulk media come in a variety of fiberglass and 100% non-woven polyester grades that are designed for light to heavy dust-loading applications. Standard size pre-cut pads are packaged in a heavy-duty carton that allows quick access and keeps the media clean before installation. Service rolls are available and are packaged in an easy to use cardboard dispenser box.

Media Type	Color	Nominal Thickness		Adhesive	Backing	
Commercial	White	1" & 2"	Progressive Density Fiberglass	Light	"Skin"	
Paint Arrestor	Green/White	2-1/2"	Progressive Density Fiberglass	-	"Skin"	
Hi-Pak	Yellow/White	3"	Progressive Density Fiberglass	Heavy	"Skin"	
HL-4	White	1"		-	-	
HL-8	White	2"	Non-Woven Polyester	-	-	
125-4P	Blue/White	5/8"		Moderate	-	SPECIFICATIONS
125-7P	Blue/White	1"	Non-Woven Polyester	Moderate	-	
P5T	Green/White	1/2"	Multi-ply Polyester	Moderate	-	
P10T	Orange/White	1"	Multi-ply Polyester	Moderate	-	
P20T	Orange/White	2"	Multi-ply Polyester	Moderate	-	
Hoghair	Blue	1"	Synthetic Fibers	-	-	


"Serving You With Locations Throughout The Nation"



Pads and Bulk Media Specifications


COMMERCIAL	PAINT ARRESTOR	НІ-РАК
 Continuous Filament Fiberglass 1" & 2" Nominal Thicknesses Available Graduated Density Skin Backing Moderate Dust Loading Capacity 74%-79% Average Arrestance Efficiency White Color U.L. Classified 	 Continuous Filament Fiberglass 2-1/2" Nominal Thickness Graduated Density Skin Backing High Paint Holding Capacity 99.3% Average Removal Efficiency Green on Air Entering Side U.L. Classified 	 Continuous Filament Fiberglass 3" Nominal Thickness Graduated Density Skin Backing High Dust Holding Capacity Yellow on Air Entering Side Non-flammable, Non-toxic Odor Free Adhesive 85% Average Arrestance Efficiency U.L. Classified

HL-4	HL-8	HOGHAIR
 100% Non-woven Polyester 1" Nominal Thickness Moderate Dust Holding Capacity Fire Retarding Bonding Agent 82% Average Arrestance Efficiency White Color U.L. Classified 	 100% Non-woven Polyester 2" Nominal Thickness Moderate Dust Holding Capacity Fire Retarding Bonding Agent 83% Average Arrestance Efficiency White Color U.L. Classified 	 100% Synthetic Fibers 1" Nominal Thickness Interlocking Fiber Design Heavy Dust Holding Capacity Cleanable by Vacuuming, Tap Water Rinsing, Hosing or Immersion in a Detergent Solution Blue Color U.L. Classified



STANDARD PRESSURE DROP

24" Nominal



STANDARD PRESSURE DROP Test Filter Size 24" x 24" Nominal

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

www.glasfloss.com · (214) 741-7056

Gasfloss


THE CLEAR CHOICE SINCE 1936

Pads and Bulk Media Specifications


125-	4P	125	-7P
 100% Non-woven Po 5/8" Nominal Thickn Graduated Density Non-toxic, Non-migr Second Stage Light Dust Holding O 84% Average Arresta White on Air Enterin, U.L. Classified 	eess ratory Adhesive Capacity nce Efficiency g Side	 100% Non-woven Po 1" Nominal Thicknes Graduated Density Non-toxic, Non-migra Second Stage Moderate Dust Holdin 86% Average Arrestan White on Air Entering U.L. Classified 	s atory Adhesive ng Capacity nce Efficiency
 100% Non-woven Polyester 1/2" Nominal Thickness Fire Retarding Bonding Agent Dual Denier Fiber Configuration Non-toxic, Non-migratory Adhesive Second Stage Moderate Dust Holding Capacity 82% Average Arrestance Efficiency White on Air Entering Side U.L. Classified 	 100% Non-woven Po 1" Nominal Thickness Fire Retarding Bondi Dual Denier Fiber Co Dual Layer Filtration Non-toxic, Non-migr Second Stage Heavy Dust Holding 92% Average Arresta White on Air Entering U.L. Classified MERV 8 	olyester ss ng Agent onfiguration Stages atory Adhesive Capacity nce Efficiency	 100% Non-woven Polyester 2" Nominal Thickness Fire Retarding Bonding Agent Dual Denier Fiber Configuration Dual Layer Filtration Stages Non-toxic, Non-migratory Adhesive Second Stage Heavy Dust Holding Capacity 93% Average Arrestance Efficiency White on Air Entering Side U.L. Classified MERV 8

STANDARD PRESSURE DROP

Test Filter Size 24" x 24" Nominal



MINIMUM PARTICLE SIZE EFFICIENCY Test Filter Size 24" x 24" Nominal

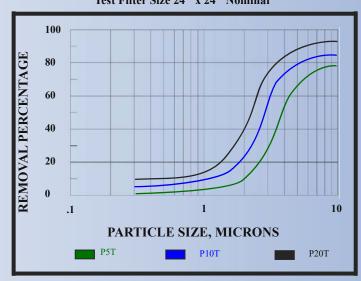

"Serving You With Locations Throughout The Nation"



CONSTRUCTION SPECIFICATIONS FOR PADS AND BULK MEDIA

Fiberglass: Shall consist of continuous filament fiberglass of graduated density to ensure depth loading and long service life. The air-exit side of the fiberglass media shall incorporate a skin backing which supports the media during operation and creates a final filtration stage. The various grades of fiberglass media are engineered for a variety of dust-loading applications and shall be treated with a non-toxic, non-flammable, odorless adhesive. The paint arrestor media is engineered for various paint over-spray applications and does not contain adhesive.

Polyester: Shall consist of 100% non-woven polyester fibers bonded together. The polyester pre-cut pads and bulk media are engineered for a variety of applications and available in single or multi-ply grades. The polyester pre-cut pads and bulk media are available dry or treated with a non-toxic, non-migratory, odorless adhesive that is incorporated into the filter media.



Glasfloss manufactures a variety of medium and high efficiency air filters which can be specified for LEED certification applications. For specific information on these products, please contact your local Glasfloss Sales Representative.





Distributed by:









"Serving You With Locations Throughout The Nation"



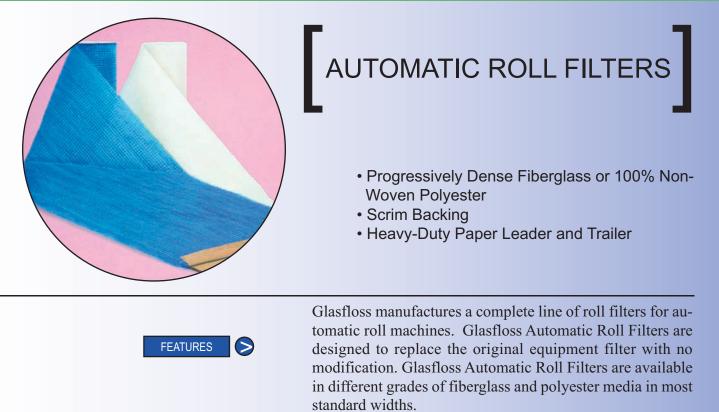

Industrial facilities, commercial buildings, government installations, schools and universities use Glasfloss Automatic Roll Filters. Whether the automatic roll machine is vertical or horizontal, Glasfloss Automatic Roll Filters are available on cores designed to fit all major roll machine manufacturers.

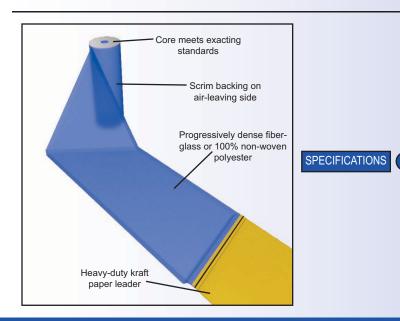



Glasfloss Automatic Roll Filters are designed to fit in automatic, semi-automatic and manual type roll filter machines without modification to existing hardware. Glasfloss Roll Filters shall incorporate progressively dense fiberglass media or 100% non-woven polyester media. For added strength, the progressively dense fiberglass and 100% non-woven polyester grades of media shall incorporate a scrim backing on the air-exit side. Glasfloss Automatic Roll Filters shall incorporate a heavy-duty paper leader and trailer that is sewn to the media. The automatic roll filter's media standard length shall be sixty-five feet.

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com · (214) 741-7056 PRODUCT BULLETIN 3 ARO • SECTION 3 • 8-19-2021



Fiberglass Specifications

EC II Automatic Roll Filters shall consist of a nominal 2" thick continuous filament fiberglass of graduated density with a unidirectional scrim backing. EC II media shall be blue in color. EC II media is engineered for moderate dust-loading applications. The fiberglass shall be treated with a non-toxic, odor-free, non-migratory tackifier. Heavy-duty kraft paper leader and trailer shall be sewn to the media to facilitate installation and removal. The media shall be wound on the specified core and shall be compatible for installation into the original equipment without modification. The media shall be sixty-five feet in length. The media shall have a 77% Average Arrestance per ANSI/ASHRAE 52.2 Test
 Standard. EC II Automatic Roll Filters shall incorporate media that is classified under U.L. std. 900.

Polyester Specifications


1250
 PHOENIX

 \bigcirc

EC II


1250 Automatic Roll Filters shall consist of a nominal 5/8" thick 100% non-woven polyester media with a scrim backing. 1250 media is engineered for moderate dust-loading applications. 1250 media shall be white in color. Heavy-duty kraft paper leader and trailer shall be sewn to the media to facilitate installation and removal. The media shall be wound on the specified core and shall be compatible for installation into the original equipment without modification. The media shall be sixty-five feet in length. The media shall have a 70% Average Arrestance per ANSI/ASHRAE 52.2 Test Standard. 1250 Automatic Roll Filters shall incorporate media that is classified under U.L. std. 900.

PHOENIX Automatic Roll Filters shall consist of a nominal 3/4" thick 100% non-woven polyester orange and white media with a scrim backing. Phoenix media is engineered for heavy dust-loading applications. Phoenix media is impregnated during manufacturing with a non-migratory tackifier. Heavy-duty kraft paper leader and trailer shall be sewn to the media to facilitate installation and removal. The media shall be wound on the specified core and shall be compatible for installation into the original equipment without modification. The media shall be sixty-five feet in length. The media shall receive a MERV 7 rating per ANSI/ASHRAE 52.2 Test Standard. Phoenix Automatic Roll Filters shall incorporate media that is classified under U.L. std. 900.



STANDARD PRESSURE DROP

MINIMUM PARTICLE SIZE EFFICIENCY Test Filter Size 24" x 24" Nominal



"Serving You With Locations Throughout The Nation"



Automatic Roll Filter Core Identification Guide

	Type AA core is		Roll Width	*Model		Type FA core is		Roll Width	* <u>Model</u>
	3/4" metal pipe.		20-1/4"	21AA		2-1/8" I.D.		8-3/4"	09FA
	Core ends are		22-1/4"	22AA		Notched fiber-		14-3/4"	15FA
	15/16" and		24-3/4"	25AA		board tube with		20-3/4"	21FA
American Air	13/16" with end	•	31-7/8"	32AA		no drive pin, discs		26-3/4"	27FA
Roll-O-Matic	disks of 11"		32-3/4"	03AA	Farr	or cups. Most		32-3/4"	03FA
Kennard	diameter on both		38-1/2"	39AA	Automatic	Farr V-8 (vertical)		38-3/4"	39FA
Herman- Nel-	ends.		39-7/8"	40AA	Manual	units use a		44-3/4"	04FA
son = 8" end			44-3/4"	04AA		1-3/4" I.D. core.		50-3/4"	51FA
plates			56-3/4"	05AA				56-3/4"	05FA
Electro-Air			68-7/8"	06AA				68-3/4"	06FA
		a. a	-						
		Glasfloss AA ID Code AA				Glasfloss ID Code	FA		
		ID COUC				ID Code			

Type CA core is 3/4" metal pipe. Core ends are 15/16" and 13/16". Metal discs avail- able, specify when ordering.	Roll Width 23-3/4" 32-3/4" 44-3/4" 56-3/4" 65-3/4" 69"	* <u>Model</u> 02CA 03CA 04CA 05CA 06CA 69CA	Conomanual Conomatic Commercial	Type CO core is 3" I.D. fiberboard tube with drive pin 2- 1/2" from one end of tube only. No cups or discs are used.		Roll Width 21-7/8" 31-7/8" 43-7/8" 55-7/8" 67-7/8"	* <u>Model</u> 02CO 03CO 04CO 05CO 06CO
Glasfloss CA ID Code CA				Glasfloss ID Code	CO		

	Type TR (Trane)	Roll Width	* <u>Model</u>		Type BLC core is		Roll Width	* <u>Model</u>
	CR (Carrier) core	19-3/8"	19TR		1-1/2" I.D.		34-5/8"	35BLC
	is 2-7/16" I.D.	21-3/8"	21TR		EMT Conduit		46-5/8"	47BLC
	fiberboard tube	25-3/4"	25TR		with 11"		58-5/8"	59BLC
	with a metal cup	31-3/8"	31TR		end plates re-		70-5/8"	71BLC
	secured and re-	35-3/8"	35TR		cessed			
Trane	cessed to a	38-3/4"	38TR	BLC	1-3/8" from each			
Carrier	depth of 1-1/2" in	45-3/8"	45TR		end			
	each end. The	50-1/4"	50TR		of core.			
	cups are stamped	54-3/8"	54TR					
	to form a 1-1/2"	59-3/8"	59TR					
	square.	61-3/4"	61TR			21 0		
	Glasfloss ID Code TR	63-3/8"	63TR			Blasfloss BLC D Code		

*The model number must be added as a suffix to the corresponding media designation to obtain proper part number.

"Serving You With Locations Throughout The Nation"

Glasfloss

\geq


>

AUTOMATIC ROLL FILTER SPECIFICATIONS

Glasfloss Automatic Roll Filters are designed to fit in automatic, semi-automatic and manual type roll filter machines without modification to existing hardware. Glasfloss Automatic Roll Filters shall incorporate progressively dense fiberglass media or 100% non-woven polyester media. For added strength, the progressively dense fiberglass and 100% nonwoven polyester grades of media shall incorporate a scrim backing on the air-exit side. Glasfloss Automatic Roll Filters shall incorporate a heavy-duty paper leader and trailer that is sewn to the media. The automatic roll filter's media standard length shall be sixty-five feet.

AUTOMATIC ROLL FILTER MEDIA SPECIFICATIONS

- E: EC II Nominal 2" fiberglass media with unidirectional scrim backing. The Media shall be blue in color. For moderate dust-loading applications.
- P: 1250 Nominal 5/8" 100% Non-woven polyester media with scrim backing. The media shall be white in color. For moderate-dust loading applications.
- X: Phoenix Nominal 3/4" 100% Non-woven polyester media with scrim backing.The media shall be orange and white in color. Tackified for heavy dust-loading applications.






Glasfloss manufactures a variety of medium and high efficiency air filters which can be specified for LEED certification applications. For specific information on these products, please contact your local Glasfloss Sales Representative.



"Serving You With Locations Throughout The Nation"





Phoenix Series


Poly-Rings, Sleeves and Links

- Available in Rings, Sleeves and Links
- 100% Non-woven Polyester Media
- Multiple Layers of Progressively Dense Media Fibers
- Internal Wire Frame Structure
- Self-sealing Media Gasket



Glasfloss Phoenix Series Poly-Rings, Sleeves and Links offer a variety of styles, multiple filtration media layers and performance levels for most applications. The self-sealing media gasket advantage of the Phoenix Series prevents dirt-laden air from bypassing the filter, an occurrence common with cardboard frame filters. The Glasfloss Phoenix Series Poly-Rings are offered in nominal thicknesses (1/2": PR-5, 1": PR-10 and 2": PR-20) for a broad range of dust loading applications.

Glasfloss Phoenix Series Poly-Rings, Sleeves and Links shall be constructed utilizing layers of 100% non-woven polyester media. For optimum performance, the air leaving side of the Phoenix Series products shall be treated with a non-toxic, non-migratory adhesive. An internal wire frame shall be thermally sealed within the filter to maintain integrity. A thermal seal shall extend around the perimeter edge of the internal wire frame and on both sides of the center wire support strut, ensuring the permanent bond of all media plies. There shall be sufficient media overlap to ensure a positive seal between the filter and the holding frame, eliminating the possibility of air bypass and the need for supplemental gasketing. PR-10 and PR-20 Poly-Rings shall be rated MERV 8 when tested in accordance with the ANSI/ASHRAE 52.2 Test Standard.

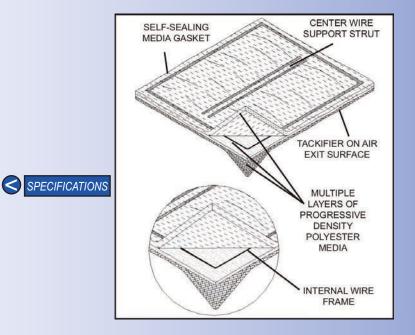

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com · (214) 741-7056 PRODUCT BULLETIN 4PHX · SECTION 4 · 8-19-2021



Phoenix Series: PR-5								
MODEL NUMBER	SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	INITIAL RESIST. IN. W.G.	MEDIA SQUARE FOOT	SIZE W x H x D NOMINAL MM	RATED VELOCITY M/H	INITIAL RESIST. PASCALS
PRP1224-5	12x24x1/2	11-3/8 x 23-3/8 x 1/2	300	0.13	2.00	305 x 610 x 13	5490	32.34
PRP1520-5	15x20x1/2	14/3/8 x 19-3/8 x 1/2	300	0.13	2.08	381 x 508 x 13	5490	32.34
PRP1620-5	16x20x1/2	15-3/8 x 19-3/8 x 1/2	300	0.13	2.22	406 x 508 x 13	5490	32.34
PRP1624-5	16x24x1/2	15-3/8 x 23-3/8 x 1/2	300	0.13	2.67	406 x 610 x 13	5490	32.34
PRP1625-5 PRP1824-5	16x25x1/2	15-3/8 x 24-3/8 x 1/2 17-3/8 x 23-3/8 x 1/2	300	0.13	2.77	406 x 635 x 13	5490	32.34
PRP1824-5 PRP2020-5	18x24x1/2 20x20x1/2	1/-3/8 x 23-3/8 x 1/2 19-3/8 x 19-3/8 x 1/2	300 300	0.13 0.13	3.00 2.77	457 x 610 x 13 508 x 508 x 13	5490 5490	32.34 32.34
PRP2024-5	20x20x1/2 20x24x1/2	19-3/8 x 23-3/8 x 1/2	300	0.13	3.33	508 x 508 x 13	5490	32.34
PRP2025-5	20x25x1/2	19-3/8 x 24-3/8 x 1/2	300	0.13	3.47	508 x 635 x 13	5490	32.34
PRP2424-5	24x24x1/2	23-3/8 x 23-3/8 x 1/2	300	0.13	4.00	610 x 610 x 13	5490	32.34
PRP2525-5	25x25x1/2	24-3/8 x 24-3/8 x 1/2	300	0.13	4.34	635 x 635 x 13	5490	32.34
	•		Pho	enix Series:	PR-10]	1	1]
PRP1224-10	12x24x1	11-3/8 x 23-3/8 x 7/8	300	0.20	2.00	305 x 610 x 25	5490	42.29
PRP1520-10	15x20x1	14-3/8 x 19-3/8 x 7/8	300	0.20	2.08	381 x 508 x 25	5490	42.29
PRP1620-10	16x20x1	15-3/8 x 19-3/8 x 7/8	300	0.20	2.22	406 x 508 x 25	5490	42.29
PRP1624-10	16x24x1	15-3/8 x 23-3/8 x 7/8	300	0.20	2.67	406 x 610 x 25	5490	42.29
PRP1625-10	16x25x1	15-3/8 x 24-3/8 x 7/8	300	0.20	2.77	406 x 635 x 25	5490	42.29
PRP1824-10	18x24x1	17-3/8 x 23-3/8 x 7/8	300	0.20	3.00	457 x 610 x 25	5490	42.29
PRP2020-10	20x20x1	19-3/8 x 19-3/8 x 7/8	300	0.20	2.77	508 x 508 x 25	5490	42.29
PRP2024-10	20x24x1	19-3/8 x 23-3/8 x 7/8	300	0.20	3.33	508 x 610 x 25	5490	42.29
PRP2025-10	20x25x1	19-3/8 x 24-3/8 x 7/8	300	0.20	3.47	508 x 635 x 25	5490	42.29
PRP2424-10	24x24x1	23-3/8 x 23-3/8 x 7/8	300	0.20	4.00	610 x 610 x 25	5490	42.29
PRP2525-10	25x25x1	24-3/8 x 24-3/8 x 7/8	300	0.20	4.34	635 x 635 x 25	5490	42.29
				enix Series:				
PRP1224-20	12x24x2	11-3/8 x 23-3/8 x 1-3/4	300	0.30	2.00	305 x 610 x 51	5490	74.64
PRP1520-20	15x20x2	14-3/8 x 19-3/8 x 1-3/4	300	0.30	2.08	381 x 508 x 51	5490	74.64
PRP1620-20	16x20x2	15-3/8 x 19-3/8 x 1-3/4	300	0.30	2.22	406 x 508 x 51	5490	74.64
PRP1624-20	16x24x2 16x25x2	15-3/8 x 23-3/8x1-3/4	300	0.30	2.67	406 x 610 x 51	5490	74.64
PRP1625-20 PRP1824-20	16x25x2 18x24x2	15-3/8 x 24-3/8 x 1-3/4 17-3/8 x 23-3/8 x 1-3/4	300 300	0.30 0.30	2.77 3.00	406 x 635 x 51 457 x 610 x 51	5490 5490	74.64 74.64
PRP2020-20	20x20x2	19-3/8 x 19-3/8 x 1-3/4	300	0.30	2.77	508 x 508 x 51	5490	74.64
PRP2024-20	20x24x2	19-3/8 x 23-3/8 x 1-3/4	300	0.30	3.33	508 x 610 x 51	5490	74.64
PRP2025-20	20x25x2	19-3/8 x 24-3/8 x 1-3/4	300	0.30	3.47	508 x 635 x 51	5490	74.64
PRP2424-20	24x24x2	23-3/8 x 23-3/8 x 1-3/4	300	0.30	4.00	610 x 610 x 51	5490	74.64
PRP2525-20	25x25x2	24-3/8 x 24-3/8 x 1-3/4	300	0.30	4.34	635 x 635 x 51	5490	74.64
	Regular manufacti	uring tolerances are +/-	1/8", to be observe			commended final resista		
i	STANDAR	RD PRESSUR	E DROP	MI	NIMUM PA	ARTICLE SIZ	LE EFFICII	ENCY
	Test Filte	er Size 24" x 24" N	ominal		Test	Filter Size 24" x 24"	Nominal	
0.5					100			
010				E				
Ŭ. 0.4 ≥				AG	80			
				É.	-			
Z ^{0.3}					60		1/	
				K	-			
O 0.2				PE	40			
E 0.1				F	20			
IS				NA N	20			
C.0 C.2 C.C. C.C. C.C. C.C. C.C. C.C. C.				MO	0			
~	250 300	350 400	450 50	■ REMOVAL PERCENTAGE	.1	1		10
	AIR F	LOW RATE, (FI	PM)	Ľ.	РА	ARTICLE SIZE, N	IICRONS	
	PR-5	PR-10	PR-20					-20
		110-10			III III	R-5 PR-		
			"	1 With Locations				

"Serving You With Locations Throughout The Nation"

Specifications



Glasfloss Phoenix Series PR-5 Ring Panels, Sleeves and Links are engineered for light dust loading applications. PR-5 shall be 100% non-woven green and white polyester. Two distinct plies of media shall be utilized, each being more dense than the one preceding it. The progressively dense fiber orientation of each media layer enables the small micron size particles to depth load within the filter. The PR-5 shall have a nominal thickness of 1/2". An internal wire frame shall be thermally sealed within the filter. There shall be sufficient media overlap to ensure a positive seal between the filter and the holding frame, eliminating air by-




Glasfloss Phoenix Series PR-10 Ring Panels, Sleeves and Links are engineered for moderate dust loading applications. PR-10 shall be 100% non-woven green and yellow polyester. Three distinctly different plies of media shall be utilized, each being more dense than the one preceding it. The progressively dense fiber orientation of each media layer enables the small micron size particles to depth load within the filter. The PR-10 shall have a nominal thickness of 1". An internal wire frame shall be thermally sealed within the filter. There shall be sufficient media overlap to ensure a positive seal between the filter and the holding frame, eliminating air bypass. The PR-10 Ring Panels shall be rated MERV 8 when tested in accordance with the ANSI/ASHRAE 52.2 Test Standard.



Glasfloss Phoenix Series PR-20 Ring Panels, Sleeves and Links are engineered for heavy dust loading applications. PR-20 shall be 100% non-woven green and white polyester. Three distinctly different plies of media shall be utilized, each being more dense than the one preceding it. The progressively dense fiber orientation of each media layer enables the small micron size particles to depth load within the filter. The PR-20 shall have a nominal thickness of 2". An internal wire frame shall be thermally sealed within the filter. There shall be sufficient media overlap to ensure a positive seal between the filter and the holding frame, eliminating air bypass. The PR-20 Ring Panels shall be rated MERV 8 when tested in accordance with the ANSI/ASHRAE 52.2 Test Standard.

Glasfloss Phoenix Series Poly-Rings, Sleeves, and Links shall be constructed utilizing multiple layers of 100% non-woven polyester media. The progressively dense fiber orientation of each media layer enables the small micron size particles to depth load within the filter. Allowing the particles to depth load will enhance the life of the filter.

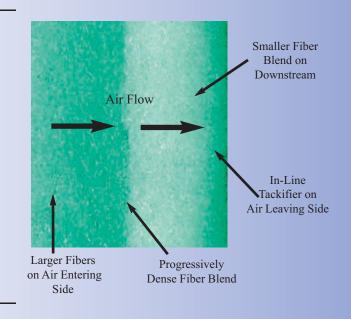

"Serving You With Locations Throughout The Nation"



Glasfloss Phoenix Series Poly-Rings, Sleeves and Links shall be constructed utilizing layers of 100% non-woven polyester media. The filter shall be a nominal 1/2", 1" or 2" in thickness. For optimum performance, the air leaving side of the Phoenix Series products shall be treated with a non-toxic, non-migratory adhesive. An internal wire frame shall be thermally sealed within the filter to maintain integrity. A thermal seal shall extend around the filter's perimeter and on both sides of the center wire support strut, ensuring the permanent bond of all media plies. There shall be sufficient media overlap to ensure a positive seal between the filter and the holding frame, eliminating the possibility of air bypass and the need for supplemental gasketing.



- "Sleeves" An economical alternative to reuse the heavy-duty internal wire frame. Available in standard and special sizes, sleeves are a good alternative for difficult to install wall units.
- "Links" Glasfloss manufactures a complete line of standard and special size poly-ring link filters to accommodate front load or side access housings. Glasfloss Poly-Ring Link filters are available in PR-5, PR-10 and PR-20 Series. There shall be sufficient divisions and seals between each poly-ring panel that allows for panel separation when necessary. Glasfloss Poly-Ring Links are ideal for side access housings, and unfiltered air is virtually eliminated with self-seals around and in-between each panel. Glasfloss Poly-Ring Panels also offer easier handling, especially for rooftop units, and they are not susceptible to damage as some traditional cardboard frame filters. Glasfloss Poly-Ring Panels are a convenient alternative to individual cardboard frame filters and can save labor costs during installation.



• "Series 55" - For added strength during operation, three center wire support struts are sealed within the filter.



Glasfloss manufactures a variety of medium and high efficiency air filters which can be specified for LEED certification applications. For specific information on these products, please contact your local Glasfloss Sales Representative.







"Serving You With Locations Throughout The Nation"






Glasfloss Z-Line Series Air Cleaner Replacement Filters offer convenient alternatives when replacement of the original filter is necessary.

• The Z-Line 700 SG filter replacement option for Aprilaire[®] (formerly Space-Gard[®]) media #201 and #401, features a convenient cartridge design to save time and money.



- The Z-Line 600 GA is a filter replacement option for Goodman[®] and Amana[®] wholehouse high efficiency media air cleaners.
- The Z-Line 500 AB and 300 AB filters are replacement options for the Trion Air Bear[®] and Air Cub[®] filters.
- The Z-Line 400 HW is a filter replacement option for the Honeywell[®] F-100 cartridge filters.
- The Z-Line 400 HWR is a filter replacement option for the Honeywell[®] F-40R cartridge filters.

Glasfloss Z-Line Series Air Cleaner Replacement Filters shall be of the extended-surface pleated media type. The media utilized shall be 100% synthetic fibers. An expanded metal reinforcement will be laminated to the air-exit side of the media by a thermo-setting adhesive to maintain continuity of the radial pleats. The expanded metal shall be galvanized to resist rust and corrosion. Moisture-resistant separators are used to ensure pleat integrity during operation. The pleated cartridge will be bonded to the peripheral interior of the outer frame. A heavy-duty moisture-resistant die-cut beverage board will be utilized for an encasing frame. The frame face will be internally laminated to the pleated cartridge apexes. Gasketing on the assembled filter prevents air bypass on the Z-Line 700 SG, 500 AB and the 300 AB. Each Z-Line Series Air Cleaner Replacement Filter is individually wrapped in a plastic sleeve to protect it from contamination before installation. All filters shall be classified under U.L. std. 900 and be rated up to 180 degrees Fahrenheit. The Z-Line Series Air Cleaner Replacement Filters shall achieve a MERV 10, MERV 11 or MERV 13 when tested in accordance with the ANSI/ASHRAE 52.2 Test Standard.

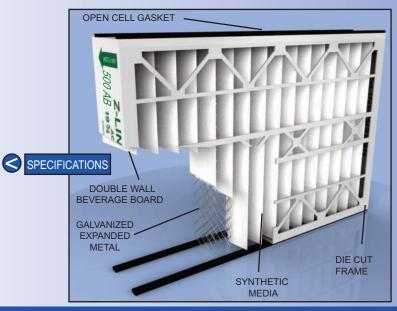


"Serving You With Locations Throughout The Nation"




MODEL NUMBER	SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	INITIAL RESIST. IN. W.G.		RESIST. IN. W.G.		SIZE W x H x D NOMINAL	RATED VELOCITY M/H	I P.	NITIA RESIST ASCAI	Г. LS
				MERV 10	MERV 11	MERV 13		MM		MERV 10	MERV 11	MERV 13
Z-Line 700 SG												
SGP20256	20 x 25 x 6	19-3/4 x 24-1/4 x 6	300	.09	.11	.13	37.85	508 x 635 x 152	5490	22.4	27.4	32.3
SGP16276	16 x 27 x 6	15-3/8 x 27 x 6	300	.09	.11	.13	38.06	406 x 686 x 152	5490	22.4	27.4	32.3
SGP20256AC	20 x 25 x 6	19-3/4 x 24-1/4 x 6	300	.18	-	-	37.85	508 x 635 x 152	5490	44.8	-	-
AC = Activated C	Carbon		2	Z-Li	ne 6	00 G	A					
GAP16205	16 x 20 x 5	15-3/8 x 21-7/8 x 5-1/4	300	.08	.09	.10	25.26	406 x 508 x 127	5490	19.9	22.4	24.9
GAP16255	16 x 25 x 5	15-3/8 x 25-1/2 x 5-1/4	300	.08	.09	.10	27.56	406 x 635 x 127	5490	19.9	22.4	24.9
GAP20205	20 x 20 x 5	20-1/4 x 20-3/4 x 5-1/4	300	.08	.09	.10	32.48	508 x 508 x 127	5490	19.9	22.4	24.9
GAP20255	20 x 25 x 5	20-1/4 x 25-3/8 x 5-1/4	300	.08	.09	.10	35.43	508 x 635 x 127	5490	19.9	22.4	24.9
			Z-Lin	le 50	0 A I	B & 3	300AB					
ABP16255	16 x 25 x 5	15-3/4 x 24-1/4 x 4-7/8	300	.07	.08	.10	18.12	406 x 635 x 127	5490	17.4	19.9	24.9
ABP20205	20 x 20 x 5	19-3/4 x 20-3/4 x 4-7/8	300	.07	.08	.10	18.72	508 x 508 x 127	5490	17.4	19.9	24.9
ABP20255	25 x 20 x 5	24-1/4 x 19-3/4 x 4-7/8	300	.07	.08	.10	22.73	635 x 508 x 127	5490	17.4	19.9	24.9
ABP16253	16 x 25 x 3	15-7/8 x 24-1/4 x 2-7/8	300	.21	.23	-	11.50	406 x 635 x 76	5490	52.2	57.2	-
ABP20255AC	25 x 20 x 5	24-1/4 x 19-3/4 x 4-7/8	300	.14	-	-	22.73	635 x 508 x 127	5490	34.8	-	-
AC = Activated C	AC = Activated Carbon Z-Line 400 HW											
HWP13204	12-1/2 x 20 x 4	12-1/2 x 20 x 4-3/8	300	.08	.09	.11	9.75	318 x 508 x 102	5490	19.9	22.4	27.4
HWP16204	16 x 20 x 4	16 x 19-7/8 x 4-3/8	300	.08	.09	.11	12.48	406 x 508 x102	5490	19.9	22.4	27.4
HWP16254	16 x 25 x 4	16 x 24-7/8 x 4-3/8	300	.08	.09	.11	15.64	406 x 635 x 102	5490	19.9	22.4	27.4
HWP20204	20 x 20 x 4	20 x 19-7/8 x 4-3/8	300	.08	.09	.11	15.60	508 x 508 x 102	5490	19.9	22.4	27.4
HWP20254	20 x 25 x 4	20 x 24-7/8 x 4-3/8	300	.08	.09	.11	19.55	508 x 635 x 102	5490	19.9	22.4	27.4
	_		2	Z-Li	ne 4	<u>00 H</u>	WR					
HWR12124	12 x 12 x 4	11-3/4 x 11-3/4 x 3-3/4	300	.10	.12	.14	5.14	305 x 305 x 102	5490	24.9	29.9	34.8
HWR12244	12 x 24 x 4	11-3/4 x 23-3/4 x 3-3/4	300	.10	.12	.14	12.37	305 x 610 x 102	5490	24.9	29.9	34.8
HWR14144	14 x 14 x 4	13-3/4 x 13-3/4 x 3-3/4	300	.10	.12	.14	7.09	356 x 356 x 102	5490	24.9	29.9	34.8
HWR14204	14 x 20 x 4	13-3/4 x 19-3/4 x 3-3/4	300	.10	.12	.14	11.32	356 x 508 x 102	5490	24.9	29.9	34.8
HWR14244	14 x 24 x 4	13-3/4 x 23-3/4 x 3-3/4	300	.10	.12	.14	13.61	356 x 610 x 102	5490	24.9	29.9	34.8
HWR14254	14 x 25 x 4	13-3/4 x 24-3/4 x 3-3/4	300	.10	.12	.14	14.82	356 x 635 x 102	5490	24.9	29.9	34.8
HWR14304	14 x 30 x 4	13-3/4 x 29-3/4 x 3-3/4	300	.10	.12	.14	18.05	356 x 762 x 102	5490	24.9	29.9	34.8
HWR16204 HWR16254	16 x 20 x 4 16 x 25 x 4	15-3/4 x 19-3/4 x 3-3/4 15-3/4 x 24-3/4 x 3-3/4	300	.10 .10	.12	.14 .14	13.37 18.87	406 x 508 x 102	5490 5490	24.9 24.9	29.9 29.9	34.8 34.8
HWR16254 HWR18184	16 x 25 x 4 18 x 18 x 4	15-3/4 x 24-3/4 x 3-3/4 17-3/4 x 17-3/4 x 3-3/4	300 300	.10	.12	.14 .14	12.30	406 x 635 x 102 450 x 450 x 102	5490	24.9	29.9 29.9	34.8
HWR18184 HWR18244	18 x 18 x 4 18 x 24 x 4	17-3/4 x 17-3/4 x 3-3/4 17-3/4 x 23-3/4 x 3-3/4	300	.10	.12	.14 .14	12.30	450 x 450 x 102 450 x 610 x 102	5490	24.9	29.9 29.9	34.8
HWR18244 HWR18304	$18 \times 24 \times 4$ $18 \times 30 \times 4$	17-3/4 x 23-3/4 x 3-3/4 17-3/4 x 29-3/4 x 3-3/4	300	.10	.12	.14	21.88	450 x 762 x 102	5490	24.9	29.9	34.8
HWR20204	$18 \times 30 \times 4$ 20 x 20 x 4	19-3/4 x 19-3/4 x 3-3/4	300	.10	.12	.14	18.52	508 x 508 x 102	5490	24.9	29.9	34.8
HWR20244	20 x 20 x 4 20 x 24 x 4	19-3/4 x 23-3/4 x 3-3/4	300	.10	.12	.14	22.27	508 x 610 x 102	5490	24.9	29.9	34.8
HWR20254	20 x 25 x 4	19-3/4 x 24-3/4 x 3-3/4	300	.10	.12	.14	23.66	508 x 635 x 102	5490	24.9	29.9	34.8
HWR20304	20 x 20 x 4	19-3/4 x 29-3/4 x 3-3/4	300	.10	.12	.14	28.80	508 x 762 x 102	5490	24.9	29.9	34.8
HWR24244	24 x 24 x 4	23-3/4 x 23-3/4 x 3-3/4	300	.10	.12	.14	27.21	610 x 610 x 102	5490	24.9	29.9	34.8
HWR24304	24 x 30 x 4	23-3/4 x 30-3/4 x 3-3/4	300	.10	.12	.14	34.64	610 x 781 x 102	5490	24.9	29.9	34.8
		Tolorances shall be +										

Tolerances shall be +/- 1/8" for height, width and +/- 1/16" depth. Recommended final resistance is .50" in. w. g.



MINIMUM PARTICLE SIZE EFFICIENCY



"Serving You With Locations Throughout The Nation"

	 Z-Line 700 SG (Aprilaire): A replacement option for the Aprilaire® (formerly Space-Gard®) media #201 and #401. The Z-Line 700 SG comes factory-assembled to assure quality and easy installation. The Z-Line 700 SG incorporates 100% synthetic fibers that are thermally-bonded, and manufactured in an engineered gradient structure. The Z-Line 700 SG achieves a MERV 10, MERV 11 or MERV 13 rating when tested in accordance with the ANSI/ASHRAE 52.2 Test Standard. Pre-applied gasketing on the assembled filters helps prevent air bypass. Installation is quick: a) Simply remove the internal plastic frame from the external metal housing and remove the dirty filter and its components. b) Install the new Z-Line 700 SG filter with the metal grid (air-exit side) facing up. Once the plastic frame is closed, it will slide back into the metal housing. The Glasfloss Z-Line 700 SG filter is also available in the 700 SGX, an activated carbon media. Refer to Z-Line SGX when ordering. Each filter is sealed in plastic to avoid contamination before use.
> 600 GA -	Z-Line 600 GA (Goodman[®] & Amana[®]) : Replacement option for the Goodman [®] and Amana [®] whole- house high efficiency media air cleaners. The Z-Line 600 GA Series incorporates 100% synthetic fibers that are thermally-bonded, and manufactured in an engineered gradient structure. The Z-Line 600 GA Series achieves a MERV 10, MERV 11 or MERV 13 rating in accordance with the ANSI/ASHRAE 52.2 Test Standard. Each filter is sealed in plastic to avoid contamination before use.
► 500 AB & 300 AB	Z-Line 500 AB (Air Bear[®]) & 300 AB (Air Cub[®]) : These pleated filters are an ideal replacement option for the Trion Air Bear [®] and Air Cub [®] filters. The Z-Line 500 AB & 300 AB filters incorporate 100% synthetic fibers that are thermally-bonded, and manufactured in an engineered gradient structure. Z-Line 500 AB & 300 AB filters achieve a MERV 10, MERV 11 or MERV 13 rating when tested in accordance with the ANSI/ASHRAE 52.2 Test Standard. Pre-applied gasketing on the top and bottom of the filters help prevent air bypass. No modification to the filter frame is necessary. The Glasfloss 500 AB & 300 AB filters are available with activated carbon to absorb unpleasant household odors. Refer to Z-Line 500 ABX & 300 ABX when ordering. Each filter is sealed in plastic to avoid contamination before use.
400 HW & HWR	Z-Line 400 HW & HWR (Honeywell [®]): Replacement option for the Honeywell [®] F-100 and FC40R air cleaner filters. The Z-Line 400 HW and 400 HWR incorporate 100% synthetic fibers that are thermally- bonded, and manufactured in an engineered gradient structure. The Z-Line 400 HW achieves a MERV 10, MERV 11, or MERV 13 rating and 400 HWR achieve a MERV 10 or MERV 11 rating when tested in accordance with the ANSI/ASHRAE 52.2 Test Standard. Each filter is sealed in plastic to avoid contamination before use. Honeywell is a registered trademark of Honeywell [®] Products, Inc.
Glasfloss HWR Filter (Wall or Ceiling Mounted) Requires a Minimum 3 78" Duct Depth Opening to Accept This Filter.	400 HWR Gasflors Gasflorg Gasflor

Gasfloss

"Serving You With Locations Throughout The Nation"




.....

Air Cleaner Cross-Reference Guide

Air Cleaner Products

Glasfloss Model and Part Number

Research Products Aprilaire[®]	Z-Line [®] 700 SG MERV 10
odel 2200, 2250 Replacement Filter Type 201	SGP20256
Model 2400 Replacement Filter Type 401	SGP16276
<u>Goodman[®] & Amana[®]</u>	Z-Line [®] 600 GA MERV 11
M0-1056	GAP16205M11
M1-1056	GAP16255M11
M2-1056	GAP20205M11
M8-1056	GAP20255M11
<u>Trion</u> [©]	Z-Line [®] 500 AB & 300 AB MERV 10
Air Bear - 255649-105	ABP16255
Air Bear - 255649-103	ABP20205
Air Bear - 255649-102	ABP20255
Air Cub - 255649-101	ABP16253
Honeywell [©]	Z-Line[®] 400 HW MERV 10
Model F-100	
FC100A1052	HWP13204
FC100A1003	HWP16204
FC100A1029	HWP16254
FC100A1011	HWP20204
FC100A1037	HWP20254
<u>Honeywell</u> [©]	<u>Z-Line[©] 400 HWR MERV 10</u>
Model FC40R	
FC40R1094	HWR12124
FC40R1037	HWR12244
FC40R1102	HWR14144
FC40R1110	HWR14204
FC40R1128	HWR14244
FC40R1045	HWR14254
FC40R1169	HWR14304
FC40R1052	HWR16204
FC40R1060	HWR16254
FC40R1185	HWR18184
FC40R1136	HWR18244
FC40R1830	HWR18304
FC40R1003	HWR20204
FC40R1144	HWR20244
FC40R1011	HWR20254
FC40R1029	HWR20304
FC40R1078	HWR24244
FC40R1177	HWR24304

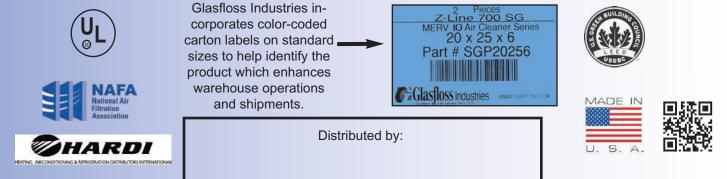


"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

www.glasfloss.com · (214) 741-7056



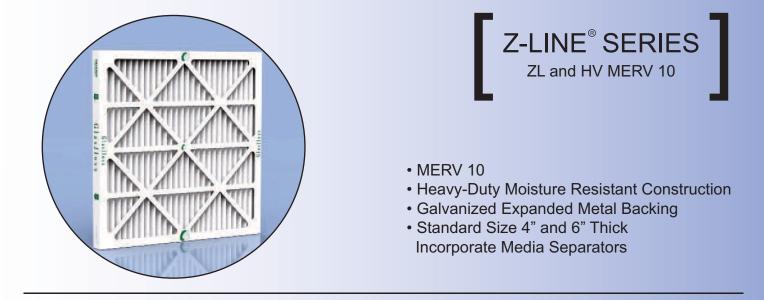


The Glasfloss Z-Line[®] Series pleated filters offer improved performance for virtually every application. All Glasfloss Z-Line[®] pleated filters feature fibers which do not absorb moisture and will not support microbial growth.

FEATURES

The Z-Line[®] Series pleated filter products include:

- · ZL Offers excellent performance and value for a wide range of applications
- HV Ideal in high-velocity systems where maximum square footage of media is necessary

Glasfloss Z-Line® Series ZL and HV air filters shall be of the extended-surface pleated-media type. The media utilized shall be made of 100% synthetic fibers. The media shall be pleated in a tapered radial configuration. A heavy duty, recycled expanded metal reinforcement shall be laminated to the air-exit side of the media by a thermo-setting adhesive to maintain continuity of the radial pleats. The expanded metal shall be galvanized to resist rust and corrosion. The pleated cartridge shall be bonded to the peripheral interior of the outer frame. A heavy-duty moisture-resistant beverage board incorporating post-consumer material shall be utilized for an encasing frame. The frame face shall be internally laminated to the pleated cartridge apexes. Glasfloss Z-Line® Series ZL and HV filters shall be classified under U.L. std. 900 and shall be rated to withstand temperatures up to 180 degrees Fahrenheit. The Glasfloss Z-Line® Series ZL and HV filters achieve a MERV 10 rating per the ANSI/ASHRAE 52.2 Test Standard.

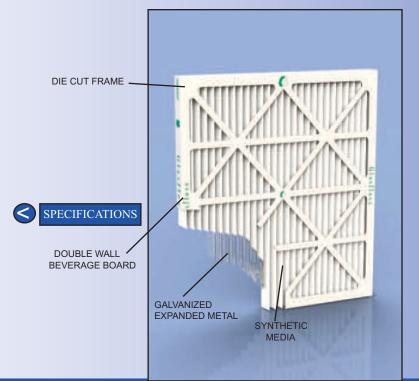

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com · (214) 741-7056
PRODUCT BULLETIN 62LINE • SECTION 6 • 3/4/22



ZL and HV STANDARD SIZE FILTERS

CLIZE	GIZE	DATED					CUZE	DATED	Thurs	TAT 1
SIZE	SIZE	RATED	INIT		ME		SIZE	RATED	INIT	
W x H x D	W x H x D	VELOCITY	RES	IST.	SQU	ARE	W x H x D	VELOCITY	RES	IST.
NOMINAL	EXACT	FPM	IN.V	N.G.	FE	ET	NOMINAL	M/H	PASC	CALS
			ZL	HV	ZL	HV	MM		ZL	HV
				11 1		11 1	TATAT			,
10 x 10 x 1	9-1/2 x 9-1/2 x 7/8	300	.20	.18	1.48	1.61	254 x 254 x 26	5490	49.8	44.8
10 x 10 x 1 10 x 20 x 1	9-1/2 x 19-1/2 x 7/8	300	.20	.18	2.47	2.67	254 x 508 x 26	5490	49.8	44.8
10 x 20 x 1 10 x 24 x 1	9-1/2 x 23-1/2 x 7/8	300	.20	.18	2.97	3.22	254 x 610 x 26	5490	49.8	44.8
10 x 20 x 1	9-5/8 x 29-5/8 x 7/8	300	.20	.18	4.33	4.95	254 x 762 x 26	5490	49.8	44.8
10 x 30 x 1 12 x 12 x 1	11-1/2 x 11 1/2 x 7/8	300	.20	.18	1.80	2.06	305 x 305 x 26	5490	49.8	44.8
12 x 12 x 1 12 x 20 x 1	11-1/2 x 19-1/2 x 7/8	300	.20	.18	2.88	3.29	305 x 508 x 26	5490	49.8	44.8
12 x 20 x 1 12 x 24 x 1	11-3/8 x 23-3/8 x 7/8	300	.20	.18	3.46	3.96	305 x 610 x 26	5490	49.8	44.8
12 x 25 x 1	11-1/2 x 24-1/2 x 7/8	300	.20	.18	4.13	4.13	305 x 635 x 26	5490	49.8	44.8
12 x 20 x 1 12 x 30 x 1	11-5/8 x 29-1/2 x 7/8	300	.20	.18	4.51	5.16	305 x 762 x 26	5490	49.8	44.8
14 x 14 x 1	13-1/2 x 13-1/2 x 7/8	300	.20	.18	2.62	3.12	356 x 356 x 26	5490	49.8	44.8
14 x 20 x 1	13-1/2 x 19-1/2 x 7/8	300	.20	.18	3.29	3.91	356 x 508 x 26	5490	49.8	44.8
14 x 24 x 1	13 1/2 x 23 1/2 x 7/8	300	.20	.18	3.96	4.70	356 x 610 x 26	5490	49.8	44.8
14 x 25 x 1	13-1/2 x 24-1/2 x 7/8	300	.20	.18	4.13	4.90	356 x 635 x 26	5490	49.8	44.8
14 x 30 x 1	13 5/8 x 29 5/8 x 7/8	300	.20	.18	5.74	6.56	356 x 762 x 26	5490	49.8	44.8
15 x 20 x 1	14-1/2 x 19-1/2 x 7/8	300	.20	.18	3.70	4.11	381 x 508 x 26	5490	49.8	44.8
15 x 30-5/8 x 1	14-5/8 x 30-1/4 x 7/8	300	.20	.18	9.28	10.57	381 x 777 x 26	5490	49.8	44.8
16 x 16 x 1	15-1/2 x 15-1/2 x 7/8	300	.20	.18	3.12	3.45	406 x 406 x 26	5490	49.8	44.8
16 x 10 x 1 16 x 20 x 1	15-1/2 x 19-1/2 x 7/8	300	.20	.18	3.91	4.32	406 x 508 x 26	5490	49.8	44.8
16 x 24 x 1	15-1/2 x 23-1/2 x 7/8	300	.20	.18	4.70	5.20	406 x 610 x 26	5490	49.8	44.8
16 x 25 x 1	15-1/2 x 24-1/2 x 7/8	300	.20	.18	4.90	5.41	406 x 635 x 26	5490	49.8	44.8
16 x 20 x 1	15-5/8 x 29-5/8 x 7/8	300	.20	.18	5.83	6.67	406 x 762 x 26	5490	49.8	44.8
18 x 18 x 1	17-1/2 x 17-1/2 x 7/8	300	.20	.18	3.88	4.44	457 x 457 x 26	5490	49.8	44.8
18 x 20 x 1	$17 - 1/2 \times 19 - 1/2 \times 7/8$	300	.20	.18	4.32	4.94	457 x 508 x 26	5490	49.8	44.8
18 x 24 x 1	17-1/2 x 23-1/2 x 7/8	300	.20	.18	5.20	5.94	457 x 610 x 26	5490	49.8	44.8
18 x 25 x 1	17-1/2 x 24-1/2 x 7/8	300	.20	.18	5.41	6.19	457 x 635 x 26	5490	49.8	44.8
18 x 30 x 1	17-5/8 x 29-5/8 x 7/8	300	.20	.18	7.20	8.23	457 x 762 x 26	5490	49.8	44.8
20 x 20 x 1	19-1/2 x 19-1/2 x 7/8	300	.20	.18	4.73	5.55	508 x 508 x 26	5490	49.8	44.8
20 x 20 x 1 20 x 22 x 1	19-1/2 x 21-7/8 x 7/8	300	.20	.18	5.24	6.15	508 x 558 x 26	5490	49.8	44.8
20 x 22 x 1 20 x 24 x 1	19-3/8 x 23-3/8 x 7/8	300	.20	.18	5.69	6.68	508 x 610 x 26	5490	49.8	44.8
20 x 25 x 1	19-1/2 x 24-1/2 x 7/8	300	.20	.18	5.93	6.96	508 x 635 x 26	5490	49.8	44.8
20 x 20 x 1 20 x 30 x 1	19-5/8 x 29-5/8 x 7/8	300	.20	.18	7.20	8.23	508 x 762 x 26	5490	49.8	44.8
20 x 30 x 1 22 x 22 x 1	21-1/2 x 21-1/2 x 7/8	300	.20	.18	6.43	7.17	558 x 558 x 26	5490	49.8	44.8
24 x 24 x 1	23-3/8 x 23-3/8 x 7/8	300	.20	.18	6.93	7.92	610 x 610 x 26	5490	49.8	44.8
24 x 30 x 1	23-5/8 x 29-5/8 x 7/8	300	.20	.18	8.66	9.90	610 x 762 x 26	5490	49.8	44.8
25 x 25 x 1	24-1/2 x 24-1/2 x 7/8	300	.20	.18	7.48	8.51	635 x 635 x 26	5490	49.8	44.8
10 x 20 x 2	9-1/2 x 19-1/2 x 1-3/4	500	.29	.27	3.84	6.24	254 x 508 x 51	9150	72.2	67.2
10 x 20 x 2 12 x 12 x 2	$11-1/2 \ge 11-1/2 \ge 1-3/4$	500	.29	.27	2.89	4.33	305 x 305 x 51	9150	72.2	67.2
12 x 12 x 2 12 x 20 x 2	$11-1/2 \ge 11-1/2 \ge 1-3/4$ $11-1/2 \ge 19-1/2 \ge 1-3/4$	500	.29	.27	4.80	7.20	305 x 508 x 51	9150	72.2	67.2
12 x 20 x 2 12 x 24 x 2	11-3/8 x 23-3/8 x 1-3/4	500	.29	.27	5.77	8.66	305 x 610 x 51	9150	72.2	67.2
14 x 20 x 2	13-1/2 x 19-1/2 x 1-3/4	500	.29	.27	5.76	8.64	356 x 508 x 51	9150	72.2	67.2
14 x 25 x 2	$13-1/2 \ge 24-1/2 \ge 1-3/4$	500	.29	.27	7.22	10.83	356 x 635 x 51	9150	72.2	67.2
15 x 20 x 2	$14-1/2 \ge 19-1/2 \ge 1-3/4$	500	.29	.27	6.24	9.12	381 x 508 x 51	9150	72.2	67.2
16 x 16 x 2	$15-1/2 \times 15-1/2 \times 1-3/4$	500	.29	.27	4.98	7.66	406 x 406 x 51	9150	72.2	67.2
16 x 20 x 2	15-1/2 x 19-1/2 x 1-3/4	500	.29	.27	6.24	9.60	406 x 508 x 51	9150	72.2	67.2
16 x 24 x 2	15-1/2 x 23-1/2 x 1-3/4	500	.29	.27	7.50	11.55	406 x 610 x 51	9150	72.2	67.2
16 x 25 x 2	$15-1/2 \ge 24-1/2 \ge 1-3/4$ 15-1/2 \text{ 24-1/2 \text{ 1-3/4}}	500	.29	.27	7.82	12.03	406 x 635 x 51	9150	72.2	67.2
18 x 18 x 2	$17-1/2 \times 17-1/2 \times 1-3/4$	500	.29	.27	6.47	9.92	457 x 457 x 51	9150	72.2	67.2
18 x 20 x 2	$17-1/2 \times 19-1/2 \times 1-3/4$	500	.29	.27	7.20	11.04	457 x 508 x 51	9150	72.2	67.2
18 x 24 x 2	17-1/2 x 23-1/2 x 1-3/4	500	.29	.27	8.66	13.28	457 x 610 x 51	9150	72.2	67.2
18 x 24 x 2 18 x 25 x 2	$17-1/2 \ge 24-1/2 \ge 1-3/4$ 17-1/2 \times 24-1/2 \times 1-3/4	500	.29	.27	9.02	13.84	457 x 635 x 51	9150	72.2	67.2
20 x 20 x 2	19-1/2 x 19-1/2 x 1-3/4	500	.29	.27	8.16	12.00	437 x 633 x 51 508 x 508 x 51	9150	72.2	67.2
20 x 20 x 2 20 x 24 x 2	19-3/8 x 23-3/8 x 1-3/4	500	.29	.27	9.81	14.43	508 x 508 x 51 508 x 610 x 51	9150	72.2	67.2
20 x 24 x 2 20 x 25 x 2	19-1/2 x 24-1/2 x 1-3/4	500	.29	.27	10.23	14.43	508 x 610 x 51	9150	72.2	67.2
20 x 25 x 2 20 x 30 x 2	19-1/2 x 24-1/2 x 1-3/4 19-5/8 x 29-5/8 x 1-3/4	500	.29	.27	10.25	18.24	508 x 635 x 51 508 x 762 x 51	9150	72.2	67.2
20 x 30 x 2 24 x 24 x 2	23-3/8 x 23-3/8 x 1-3/4	500	.29	.27	12.00	18.24	610 x 610 x 51	9150	72.2	67.2
24 x 24 x 2 25 x 25 x 2	23-3/8 x 23-3/8 x 1-3/4 24-1/2 x 24-1/2 x 1-3/4	500	.29	.27	11.55	17.61	635 x 635 x 51	9150	72.2	
23 x 23 x 2	2-1-1/2 A 2-1/2 A 1-3/4	500	.29	.27	12.05	10.05	055 X 055 X 51	9150	12.2	67.2

Tolerances shall be +/- 1/8" for height, width and +/- 1/16" for depth. Recommended final resistance is 1.00" w.g.

All special sizes will be undersized by 1/8" unless specified otherwise.

Glasfloss

THE CLEAR CHOICE SINCE 1936

SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	RES	TIAL SIST. W.G.	ME SQU FE	ARE	SIZE W x H x D NOMINAL	RATED VELOCITY M/H	INIT RES PASC	
			ZL	HV	ZL	HV	MM	111/11	ZL	HV
12 x 24 x 4	11-3/8 x 23-3/8 x 3-3/4	500	.24	.22	11.13	13.61	457 x 610 x 102	9150	59.7	54.7
16 x 20 x 4	15-1/2 x 19-1/2 x 3-3/4	500	.24	.22	12.34	15.43	406 x 508 x 102	9150	59.7	54.7
16 x 24 x 4	15-1/2 x 23-1/2 x 3-3/4	500	.24	-	14.84	-	406 x 610 x 102	9150	59.7	-
16 x 25 x 4	15-1/2 x 24-1/2 x 3-3/4	500	.24	.22	15.47	19.34	406 x 635 x 102	9150	59.7	54.7
18 x 24 x 4	17-1/2 x 23-1/2 x 3-3/4	500	.24	.22	17.32	21.03	457 x 610 x 102	9150	59.7	54.7
20 x 20 x 4	19-1/2 x 19-1/2 x 3-3/4	500	.24	.22	15.43	18.52	508 x 508 x 102	9150	59.7	54.7
20 x 24 x 4	19-3/8 x 23-3/8 x 3-3/4	500	.24	.22	18.55	22.27	508 x 610 x 102	9150	59.7	54.7
20 x 25 x 4	19-1/2 x 24-1/2 x 3-3/4	500	.24	.22	19.34	23.20	508 x 635 x 102	9150	59.7	54.7
24 x 24 x 4	23-3/8 x 23-3/8 x 3-3/4	500	.24	.22	22.27	27.21	610 x 610 x 102	9150	59.7	54.7
12 x 24 x 6	11-3/8 x 23-3/8 x 5-3/4	500	-	.18	-	20.86	305 x 610 x 152	9150	-	44.8
16 x 20 x 6	15-1/2 x 19-1/2 x 5-3/4	500	-	.18	-	23.66	406 x 508 x 152	9150	-	44.8
16 x 25 x 6	15-1/2 x 24-1/2 x 5-3/4	500	-	.18	-	29.65	406 x 635 x 152	9150	-	44.8
18 x 24 x 6	17-1/2 x 23-1/2 x 5-3/4	500	-	.18	-	32.24	457 x 610 x 152	9150	-	44.8
20 x 20 x 6	19-1/2 x 19-1/2 x 5-3/4	500	-	.18	-	28.39	508 x 508 x 152	9150	-	44.8
20 x 24 x 6	19-3/8 x 23-3/8 x 5-3/4	500	-	.18	-	34.14	508 x 610 x 152	9150	-	44.8
20 x 25 x 6	19-1/2 x 24-1/2 x 5-3/4	500	-	.18	-	35.58	508 x 635 x 152	9150	-	44.8
24 x 24 x 6	23-3/8 x 23-3/8 x 5-3/4	500	-	.18	-	41.73	610 x 610 x 152	9150	-	44.8

Tolerances shall be +/-1/8" for height, width and +/-1/16" for depth. Recommended final resistance is 1.00" w.g. All special sizes will be undersized by 1/8" unless specified otherwise.

Pleats Per Lineal Foot	
------------------------	--


DEPTH	ZL	HV
1"	14	16
2"	10	15
4"	9	11
6"	-	11

Media Area	to Face	Area	Ratio

DEPTH	ZL	HV
1"	1.73	1.97
2"	2.88	4.40
4"	5.56	6.80
6"	-	10.43

MINIMUM PARTICLE SIZE EFFICIENCY

Test Filter Size 24" x 24" x 2" Nominal




"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

www.glasfloss.com (214) 741-7056



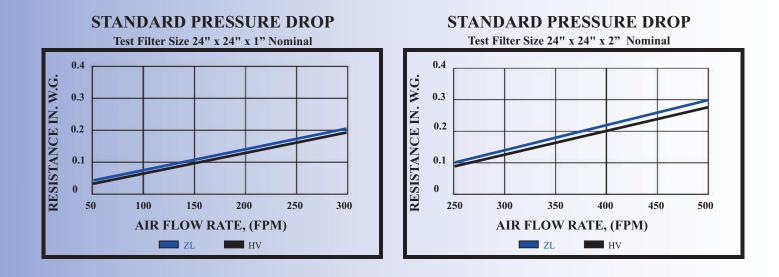


Glasfloss Industries incorporates color-coded carton labels on standard sizes to help identify the product, which enhance warehouse operations and shipments.





"Serving You With Locations Throughout The Nation"




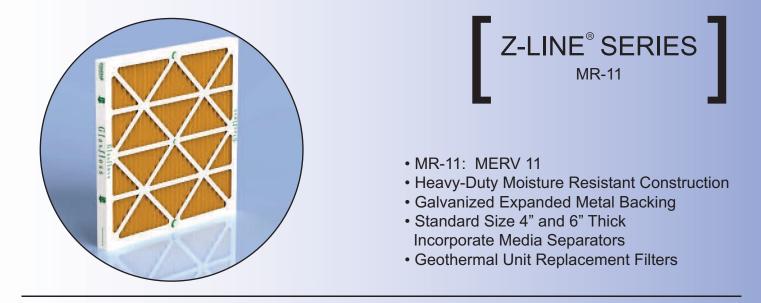



The Glasfloss Z-Line[®] Series MR-11 pleated filters offer improved performance for virtually every application. All Glasfloss Z-Line[®] MR-11 pleated filters feature fibers which do not absorb moisture and will not support microbial growth. Z-Line[®] Series MR-11 pleated filters provide high performance with low pressure drop for energy efficiency

Glasfloss Z-Line[®] Series MR-11 air filters shall be of the extended-surface pleated-media type. The media utilized shall be made of 100% synthetic fibers. The media shall be pleated in a tapered radial configuration. A heavy duty, recycled expanded metal reinforcement shall be laminated to the air-exit side of the media by a thermo-setting adhesive to maintain continuity of the radial pleats. The expanded metal shall be galvanized to resist rust and corrosion. The pleated cartridge shall be bonded to the peripheral interior of the outer frame. A heavy-duty moisture-resistant beverage board incorporating post-consumer material shall be utilized for an encasing frame. The frame face shall be internally laminated to the pleated cartridge apexes. Glasfloss Z-Line[®] Series MR-11 filters shall be classified under U.L. std. 900 and shall be rated to withstand temperatures up to 180 degrees Fahrenheit. The Glasfloss Z-Line® Series MR-11 filters achieve a MERV 11 rating per the ANSI/ASHRAE 52.2 Test Standard.

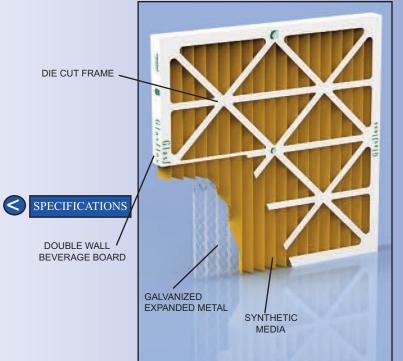

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com · (214) 741-7056
PRODUCT BULLETIN 62LINE • SECTION 6 • 3/4/22



MR-11 STANDARD SIZE FILTERS

SIZE	SIZE	RATED	INITIAL	MEDIA	SIZE	RATED	INITIAL
W x H x D	W x H x D	VELOCITY	RESIST.	SQUARE	WxHxD	VELOCITY	RESIST.
NOMINAL	EXACT	FPM	IN. W.G.	FEET	NOMINAL	M/H	PASCALS
	Linter	11.11	In the two of two of the two of t	TLLI		141/11	1110 011110
					MM		
10 x 10 x 1	9-1/2 x 9-1/2 x 7/8	300	.24	1.61	254 x 254 x 26	5490	59.7
10 x 20 x 1	9-1/2 x 19-1/2 x 7/8	300	.24	2.67	254 x 508 x 26	5490	59.7
10 x 24 x 1	9-1/2 x 23-1/2 x 7/8	300	.24	3.22	254 x 610 x 26	5490	59.7
10 x 30 x 1	9-5/8 x 29-5/8 x 7/8	300	.24	4.95	254 x 762 x 26	5490	59.7
12 x 12 x 1	11-1/2 x 11 1/2 x 7/8	300	.24	2.06	305 x 305 x 26	5490	59.7
12 x 20 x 1	11-1/2 x 19-1/2 x 7/8	300	.24	3.29	305 x 508 x 26	5490	59.7
12 x 24 x 1	11-3/8 x 23-3/8 x 7/8	300	.24	3.96	305 x 610 x 26	5490	59.7
12 x 25 x 1	11-1/2 x 24-1/2 x 7/8	300	.24	4.13	305 x 635 x 26	5490	59.7
12 x 30 x 1	11-5/8 x 29-1/2 x 7/8	300	.24	5.16	305 x 762 x 26	5490	59.7
14 x 14 x 1	13-1/2 x 13-1/2 x 7/8	300	.24	3.12	356 x 356 x 26	5490	59.7
14 x 20 x 1	13-1/2 x 19-1/2 x 7/8	300	.24	3.91	356 x 508 x 26	5490	59.7
14 x 24 x 1	13 1/2 x 23 1/2 x 7/8	300	.24	4.70	356 x 610 x 26	5490	59.7
14 x 25 x 1	13-1/2 x 24-1/2 x 7/8	300	.24	4.90	356 x 635 x 26	5490	59.7
14 x 30 x 1	13 5/8 x 29 5/8 x 7/8	300	.24	6.56	356 x 762 x 26	5490	59.7
15 x 20 x 1	14-1/2 x 19-1/2 x 7/8	300	.24	4.11	381 x 508 x 26	5490	59.7
15 x 30-5/8 x 1	14-5/8 x 30-1/4 x 7/8	300	.24	10.57	381 x 777 x 26	5490	59.7
16 x 16 x 1	15-1/2 x 15-1/2 x 7/8	300	.24	3.45	406 x 406 x 26	5490	59.7
16 x 20 x 1	15-1/2 x 19-1/2 x 7/8	300	.24	4.32	406 x 508 x 26	5490	59.7
16 x 24 x 1	15-1/2 x 23-1/2 x 7/8	300	.24	5.20	406 x 610 x 26	5490	59.7
16 x 25 x 1	15-1/2 x 24-1/2 x 7/8	300	.24	5.41	406 x 635 x 26	5490	59.7
16 x 30 x 1	15-5/8 x 29-5/8 x 7/8	300	.24	6.67	406 x 762 x 26	5490	59.7
18 x 18 x 1	17-1/2 x 17-1/2 x 7/8	300	.24	4.44	457 x 457 x 26	5490	59.7
18 x 20 x 1 18 x 24 x 1	17-1/2 x 19-1/2 x 7/8 17-1/2 x 23-1/2 x 7/8	300 300	.24	4.94	457 x 508 x 26	5490	59.7 59.7
18 x 25 x 1	17-1/2 x 23-1/2 x 7/8 17-1/2 x 24-1/2 x 7/8	300	.24	5.94	457 x 610 x 26	5490 5490	59.7
18 x 20 x 1 18 x 30 x 1	17-5/8 x 29-5/8 x 7/8	300	.24 .24	6.19 8.23	457 x 635 x 26	5490	59.7
20 x 20 x 1	19-1/2 x 19-1/2 x 7/8	300	.24 .24	5.55	457 x 762 x 26 508 x 508 x 26	5490	59.7
20 x 20 x 1 20 x 22 x 1	19-1/2 x 21-7/8 x 7/8	300	.24	6.15	508 x 558 x 26	5490	59.7
20 x 24 x 1	19-3/8 x 23-3/8 x 7/8	300	.24	6.68	508 x 610 x 26	5490	59.7
20 x 25 x 1	19-1/2 x 24-1/2 x 7/8	300	.24	6.96	508 x 635 x 26	5490	59.7
20 x 30 x 1	19-5/8 x 29-5/8 x 7/8	300	.24	8.23	508 x 762 x 26	5490	59.7
22 x 22 x 1	21-1/2 x 21-1/2 x 7/8	300	.24	7.17	558 x 558 x 26	5490	59.7
24 x 24 x 1	23-3/8 x 23-3/8 x 7/8	300	.24	7.92	610 x 610 x 26	5490	59.7
24 x 30 x 1	23-5/8 x 29-5/8 x 7/8	300	.24	9.90	610 x 762 x 26	5490	59.7
25 x 25 x 1	24-1/2 x 24-1/2 x 7/8	300	.24	8.51	635 x 635 x 26	5490	59.7
10 x 20 x 2	9-1/2 x 19-1/2 x 1-3/4	500	.31	6.24	254 x 508 x 51	9150	77.1
12 x 12 x 2	11-1/2 x 11-1/2 x 1-3/4	500	.31	4.33	305 x 305 x 51	9150	77.1
12 x 20 x 2	11-1/2 x 19-1/2 x 1-3/4	500	.31	7.20	305 x 508 x 51	9150	77.1
12 x 24 x 2	11-3/8 x 23-3/8 x 1-3/4	500	.31	8.66	305 x 610 x 51	9150	77.1
14 x 20 x 2	13-1/2 x 19-1/2 x 1-3/4	500	.31	8.64	356 x 508 x 51	9150	77.1
14 x 25 x 2	13-1/2 x 24-1/2 x 1-3/4	500	.31	10.83	356 x 635 x 51	9150	77.1
15 x 20 x 2	14-1/2 x 19-1/2 x 1-3/4	500	.31	9.12	381 x 508 x 51	9150	77.1
16 x 16 x 2 16 x 20 x 2	15-1/2 x 15-1/2 x 1-3/4 15-1/2 x 19-1/2 x 1-3/4	500 500	.31	7.66	406 x 406 x 51	9150	77.1 77.1
$16 \times 20 \times 2$ $16 \times 24 \times 2$	15-1/2 x 19-1/2 x 1-3/4 15-1/2 x 23-1/2 x 1-3/4	500	.31	9.60	406 x 508 x 51	9150	77.1
16 x 25 x 2	15-1/2 x 23-1/2 x 1-3/4 15-1/2 x 24-1/2 x 1-3/4	500	.31 .31	11.55 12.03	406 x 610 x 51 406 x 635 x 51	9150 9150	77.1
18 x 18 x 2	$13-1/2 \times 24-1/2 \times 1-3/4$ 17-1/2 x 17-1/2 x 1-3/4	500	.31	9.92	457 x 457 x 51	9150	77.1
18 x 20 x 2	$17-1/2 \times 19-1/2 \times 1-3/4$ 17-1/2 x 19-1/2 x 1-3/4	500	.31	11.04	457 x 508 x 51	9150	77.1
18 x 24 x 2	$17 - 1/2 \ge 23 - 1/2 \ge 1 - 3/4$	500	.31	13.28	457 x 610 x 51	9150	77.1
18 x 25 x 2	17-1/2 x 24-1/2 x 1-3/4	500	.31	13.84	457 x 635 x 51	9150	77.1
20 x 20 x 2	19-1/2 x 19-1/2 x 1-3/4	500	.31	12.00	508 x 508 x 51	9150	77.1
20 x 24 x 2	19-3/8 x 23-3/8 x 1-3/4	500	.31	14.43	508 x 610 x 51	9150	77.1
20 x 25 x 2	19-1/2 x 24-1/2 x 1-3/4	500	.31	15.04	508 x 635 x 51	9150	77.1
20 x 30 x 2	19-5/8 x 29-5/8 x 1-3/4	500	.31	18.24	508 x 762 x 51	9150	77.1
24 x 24 x 2	23-3/8 x 23-3/8 x 1-3/4	500	.31	17.61	610 x 610 x 51	9150	77.1
25 x 25 x 2	24-1/2 x 24-1/2 x 1-3/4	500	.31	18.65	635 x 635 x 51	9150	77.1
24 x 28 x 2	23-1/2 x 27-3/4 x 1-3/4	500	.31	21.69	610 x 762 x 51	9150	77.1
28 x 30 x 2	27-3/4 x 29-3/8 x 1-3/4	500	.31	25.31	711 x 762 x 51	9150	77.1
30 x 32 x 2	29-3/8 x 31-3/4 x 1-3/4	500	.31	28.92	762 x 813 x 51	9150	77.1
30 x 36 x 2	29-3/8 x 35-3/4 x 1-3/4	500	.31	32.54	762 x 914 x 51	9150	77.1

Tolerances shall be +/- 1/8" for height, width and +/- 1/16" for depth. Recommended final resistance is 1.00" w.g.


All special sizes will be undersized by 1/8" unless specified otherwise.

"Serving You With Locations Throughout The Nation"



SIZE W x H x D NOMINAL		RATED VELOCITY FPM	INITIAL RESIST. IN. W.G.	MEDIA SQUARE FEET	SIZE W x H x D NOMINAL MM	RATED VELOCITY M/H	INITIAL RESIST. PASCALS
12 x 24 x 4	11-3/8 x 23-3/8 x 3-3/4	500	.25	13.61	457 x 610 x 102	9150	62.2
16 x 20 x 4	15-1/2 x 19-1/2 x 3-3/4	500	.25	15.43	406 x 508 x 102	9150	62.2
16 x 25 x 4	15-1/2 x 24-1/2 x 3-3/4	500	.25	19.34	406 x 635 x 102	9150	62.2
18 x 24 x 4	17-1/2 x 23-1/2 x 3-3/4	500	.25	21.03	457 x 610 x 102	9150	62.2
20 x 20 x 4	19-1/2 x 19-1/2 x 3-3/4	500	.25	18.52	508 x 508 x 102	9150	62.2
20 x 24 x 4	19-3/8 x 23-3/8 x 3-3/4	500	.25	22.27	508 x 610 x 102	9150	62.2
20 x 25 x 4	19-1/2 x 24-1/2 x 3-3/4	500	.25	23.20	508 x 635 x 102	9150	62.2
24 x 24 x 4	23-3/8 x 23-3/8 x 3-3/4	500	.25	27.21	610 x 610 x 102	9150	62.2
12 x 24 x 6	11-3/8 x 23-3/8 x 5-3/4	500	.22	20.86	305 x 610 x 152	9150	54.7
16 x 20 x 6	15-1/2 x 19-1/2 x 5-3/4	500	.22	23.66	406 x 508 x 152	9150	54.7
16 x 25 x 6	15-1/2 x 24-1/2 x 5-3/4	500	.22	29.65	406 x 635 x 152	9150	54.7
18 x 24 x 6	17-1/2 x 23-1/2 x 5-3/4	500	.22	32.24	457 x 610 x 152	9150	54.7
20 x 20 x 6	19-1/2 x 19-1/2 x 5-3/4	500	.22	28.39	508 x 508 x 152	9150	54.7
20 x 24 x 6	19-3/8 x 23-3/8 x 5-3/4	500	.22	34.14	508 x 610 x 152	9150	54.7
20 x 25 x 6	19-1/2 x 24-1/2 x 5-3/4	500	.22	35.58	508 x 635 x 152	9150	54.7
24 x 24 x 6	23-3/8 x 23-3/8 x 5-3/4	500	.22	41.73	610 x 610 x 152	9150	54.7

Tolerances shall be +/-1/8" for height, width and +/-1/16" for depth. Recommended final resistance is 1.00" w.g. All special sizes will be undersized by 1/8" unless specified otherwise.




Media Area to Face Area Ratio


DEPTH	MR-11
1"	1.97
2"	4.40
4"	6.80
6"	10.43

STANDARD PRESSURE DROP

Test Filter Size 24" x 1" Nominal

MINIMUM PARTICLE SIZE EFFICIENCY





STANDARD PRESSURE DROP


Test Filter Size 24" x 24" x 2" Nominal



"Serving You With Locations Throughout The Nation"



Glasfloss Z-Line® MERV 11 Geothermal Unit Replacement Filters One Piece Die-Cut Frame Construction



- Increased Media Area
- MERV 11 Performance

K

GEOTHERMAL REPLACEMENT SIZES							
PART ACTUAL CARTON CARTON							
NUMBER	SIZES	QUANTITY	WEIGHT				
M1124282	23-1/2 x 27-3/4 x 2	6	14 LB				
M1128302	27-3/4 x 29-3/8 x 2	6	16 LB				
M1130322	29-3/8 x 31-3/4 x 2	6	17 LB				
M1130362	29-3/8 x 35-3/4 x 2	6	18 LB				

Glasfloss Industries incorporates color-coded carton labels on standard sizes to help identify the product, which enhance warehouse operations and shipments.









Glasfloss manufactures a variety of medium and high efficiency air filters which can be specified for LEED certification applications. For specific information on these products, please contact your local Glasfloss Sales Representative.








"Serving You With Locations Throughout The Nation"








- MERV 13
- Electrostatically-Charged 100% Synthetic Media
- Heavy-Duty Moisture-Resistant Construction
- Standard Size 4" Incorporate Media Separators



The Glasfloss Z-Line Series MR-13 pleated air filter features the latest in media technology to achieve MERV 13 while maintaining low pressure drop and good service life. The new Z-Line Series MR-13 pleat is optimized for "LEED" compliance in new and existing buildings as well as providing a cost-effective upgrade from lower efficiency pleated filters for a variety of commercial and industrial applications. The Z-Line Series MR-13 pleat is available in many standard face dimensions in 1", 2" and 4" depths.

The Glasfloss Z-Line Series MR-13 air filter shall be of the extended-surface pleated-media type. The media incorporates 100% synthetic fibers that are electrostatically charged. The filter fibers are thermally bonded and manufactured in an engineered gradient structure. An expanded metal reinforcement shall be laminated to the air-exit side of the media by a thermo-setting adhesive to maintain continuity of the radial pleats. The expanded metal shall be galvanized to resist rust and corrosion. The media shall be pleated in a tapered radial configuration. The pleated cartridge shall be bonded to the peripheral interior of the outer frame. A heavy-duty moisture-resistant beverage board shall be utilized for an encasing frame. The frame shall be internally laminated to the pleated cartridge apexes. Z-Line MR-13 Series filters shall be classified under U.L. std. 900 and shall be rated to withstand temperatures up to 180 degrees Fahrenheit. Z-Line MR-13 Series filters shall be rated MERV 13 when tested in accordance with the ANSI/ASHRAE 52.2 Test Standard.

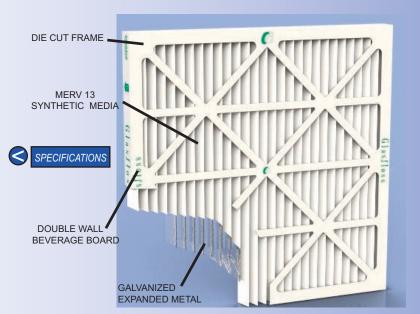

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com · (214) 741-7056
PRODUCT BULLETIN 6MR13 · SECTION 6 · 8-20-21



Z-LINE SERIES MR-13 STANDARD SIZE FILTERS

MODEL NUMBER	SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	INITIAL RESIST. IN. W.G	MEDIA SQUARE FEET		SIZE W x H x D NOMINAL MM	RATED VELOCITY M/H	INITIAL RESIST. PASCAL
M1310101	10 x 10 x 1	9-1/2 x 9-1/2 x 7/8	300	.35	1.61	i F	254 x 254 x 25	5490	112.09
M1310201	10 x 20 x 1	9-1/2 x 19-1/2 x 7/8	300	.35	2.67		254 x 508 x 25	5490	112.09
M1310241	10 x 24 x 1	9-1/2 x 23-3/8 x 7/8	300	.35	3.22		254 x 610 x 25	5490	112.09
M1310301	10 x 30 x 1	9-5/8 x 29-5/8 x 7/8	300	.35	4.95		254 x 762 x 25	5490	112.09
M1312121	12 x 12 x 1	11-1/2 x 11-1/2 x 7/8	300	.35	2.06		305 x 305 x 25	5490	112.09
M1312201	12 x 20 x 1	11-1/2 x 19-1/2 x 7/8	300	.35	3.29		305 x 508 x 25	5490	112.09
M1312241	12 x 24 x 1	11-3/8 x 23-3/8 x 7/8	300	.35	3.96		305 x 610 x 25	5490	112.09
M1312251	12 x 25 x 1	11-1/2 x 24-1/2 x 7/8	300	.35	4.13		305 x 635 x 25	5490	112.09
M1312301	12 x 30 x 1	11-5/8 x 29-1/2 x 7/8	300	.35	5.16		305 x 762 x 25	5490	112.09
M1314141	14 x 14 x 1	13-1/2 x 13-1/2 x 7/8	300	.35	3.12		356 x 356 x 25	5490	112.09
M1314201	14 x 20 x 1	13-1/2 x 19-1/2 x 7/8	300	.35	3.91		356 x 508 x 25	5490	112.09
M1314241	14 x 24 x 1	13-1/2 x 23-3/8 x 7/8	300	.35	4.70		356 x 610 x 25	5490	112.09
M1314251	14 x 25 x 1	13-1/2 x 24-1/2 x 7/8	300	.35	4.90		356 x 635 x 25	5490	112.09
M1314301	14 x 30 x 1	13-5/8 x 29-5/8 x 7/8	300	.35	6.56		356 x 762 x 25	5490	112.09
M1315201	15 x 20 x 1	14-1/2 x 19-1/2 x 7/8	300	.35	4.11		381 x 508 x 25	5490	112.09
M131530K1	15 x 30-5/8 x 1	14-5/8 x 30-1/4 x 7/8	300	.35	10.57		381 x 778 x 25	5490	112.09
M1316161	16 x 16 x 1	15-1/2 x 15-1/2 x 7/8	300	.35	3.45		406 x 406 x 25	5490	112.09
M1316201	16 x 20 x 1	15-1/2 x 19-1/2 x 7/8	300	.35	4.32		406 x 508 x 25	5490	112.09
M1316241	16 x 24 x 1	15-1/2 x 23-1/2 x 7/8	300	.35	5.20		406 x 610 x 25	5490	112.09
M1316251	16 x 25 x 1	15-1/2 x 24-1/2 x 7/8	300	.35	5.41		406 x 635 x 25	5490	112.09
M1316301	16 x 30 x 1	15-5/8 x 29-5/8 x 7/8	300	.35	6.67		406 x 762 x 25	5490	112.09
M1318181	18 x 18 x 1	17-1/2 x 17-1/2 x 7/8	300	.35	4.44		457 x 457 x 25	5490	112.09
M1318201	18 x 20 x 1	17-1/2 x 19-1/2 x 7/8	300	.35	4.94		457 x 508 x 25	5490	112.09
M1318241	18 x 24 x 1	17-1/2 x 23-3/8 x 7/8	300	.35	5.94		457 x 610 x 25	5490	112.09
M1318251	18 x 25 x 1	17-1/2 x 24-1/2 x 7/8	300	.35	6.19		457 x 635 x 25	5490	112.09
M1318301	18 x 30 x 1	17-5/8 x 29-5/8 x 7/8	300	.35	8.23		457 x 762 x 25	5490	112.09
M1320201	20 x 20 x 1	19-5/8 x 19-5/8 x 7/8	300	.35	5.55		508 x 508 x 25	5490	112.09
M1320221	20 x 22 x 1	19-5/8 x 21-1/2 x 7/8	300	.35	6.15		508 x 559 x 25	5490	112.09
M1320241	20 x 24 x 1	19-5/8 x 23-3/8 x 7/8	300	.35	6.68		508 x 610 x 25	5490	112.09
M1320251	20 x 25 x 1	19-5/8 x 24-1/2 x 7/8	300	.35	6.96		508 x 635 x 25	5490	112.09
M1320301	20 x 30 x 1	19-5/8 x 29-5/8 x 7/8	300	.35	8.23		508 x 762 x 25	5490	112.09
M1322221	22 x 22 x 1	21-1/2 x 21-1/2 x 7/8	300	.35	7.17		559 x 559 x 25	5490	112.09
M1324241	24 x 24 x 1	23-3/8 x 23-3/8 x 7/8	300	.35	7.92		610 x 610 x 25	5490	112.09
M1324301	24 x 30 x 1	23-3/8 x 29-5/8 x 7/8	300	.35	9.90		610 x 762 x 25	5490	112.09
M1325251	25 x 25 x 1	24-1/2 x 24-1/2 x 7/8	300	.35	8.51		635 x 635 x 25	5490	112.09

Tolerances shall be +/- 1/8" for height, width and +/- 1/16" for depth. Recommended final resistance is 1.00" w.g.

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

www.glasfloss.com · (214) 741-7056




Z-LINE SERIES MR-13 STANDARD SIZE FILTERS

MODEL NUMBER	SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	INITIAL RESIST. IN. W.G	MEDIA SQUARE FEET		SIZE W x H x D NOMINAL MM	RATED VELOCITY M/H	INITIAL RESIST. PASCAL
M1310202	10 x 20 x 2	9-1/2 x 19-1/2 x 1-3/4	500	.39	6.24	1	254 x 508 x 51	9150	94.65
M1312122	12 x 12 x 2	11-1/2 x 11-1/5 x 1-3/4	500	.39	4.33		305 x 305 x 51	9150	94.65
M1312202	12 x 20 x 2	11-1/2 x 19-1/2 x 1-3/4	500	.39	7.20		305 x 508 x 51	9150	94.65
M1312242	12 x 24 x 2	11-3/8 x 23-3/8 x 1-3/4	500	.39	8.66		305 x 610 x 51	9150	94.65
M1314202	14 x 20 x 2	13-1/2 x 19-1/2 x 1-3/4	500	.39	8.64		356 x 508 x 51	9150	94.65
M1314252	14 x 25 x 2	13-1/2 x 24-1/2 x 1-3/4	500	.39	10.83		356 x 635 x 51	9150	94.65
M1315202	15 x 20 x 2	14-1/2 x 19-1/2 x 1-3/4	500	.39	9.12		381 x 508 x 51	9150	94.65
M1316162	16 x 16 x 2	15-1/2 x 15-1/2 x 1-3/4	500	.39	7.66		406 x 406 x 51	9150	94.65
M1316202	16 x 20 x 2	15-1/2 x 19-1/2 x 1-3/4	500	.39	9.60		406 x 508 x 51	9150	94.65
M1316242	16 x 24 x 2	15-1/2 x 23-1/2 x 1-3/4	500	.39	11.55		406 x 610 x 51	9150	94.65
M1316252	16 x 25 x 2	15-1/2 x 24-1/2 x 1-3/4	500	.39	12.03		406 x 635 x 51	9150	94.65
M1318182	18 x 18 x 2	17-1/2 x 17-1/2 x 1-3/4	500	.39	9.92		457 x 457 x 51	9150	94.65
M1318202	18 x 20 x 2	17-1/2 x 19-1/2 x 1-3/4	500	.39	11.04		457 x 508 x 51	9150	94.65
M1318242	18 x 24 x 2	17-1/2 x 23-1/2 x 1-3/4	500	.39	13.28		457 x 610 x 51	9150	94.65
M1318252	18 x 25 x 2	17-1/2 x 24-1/2 x 1-3/4	500	.39	13.84		457 x 635 x 51	9150	94.65
M1320202	20 x 20 x 2	19-1/2 x 19-1/2 x 1-3/4	500	.39	12.00		508 x 508 x 51	9150	94.65
M1320242	20 x 24 x 2	19-3/8 x 23-3/8 x 1-3/4	500	.39	14.43		508 x 610 x 51	9150	94.65
M1320252	20 x 25 x 2	19-1/2 x 24-1/2 x 1-3/4	500	.39	15.04		508 x 635 x 51	9150	94.65
M1320302	20 x 30 x 2	19-5/8 x 29-5/8 x 1-3/4	500	.39	18.24		508 x 762 x 51	9150	94.65
M1324242	24 x 24 x 2	23-3/8 x 23-3/8 x 1-3/4	500	.39	17.61		610 x 610 x 51	9150	94.65
M1325252	25 x 25 x 2	24-1/2 x 24-1/2 x 1-3/4	500	.39	18.65		635 x 635 x 51	9150	94.65
M1312244	12 x 24 x 4	11-3/8 x 23-3/8 x 3-3/4	500	.34	13.61		305 x 610 x 102	9150	82.20
M1316204	16 x 20 x 4	15-1/2 x 19-1/2 x 3-3/4	500	.34	15.43		406 x 508 x 102	9150	82.20
M1316254	16 x 25 x 4	15-1/2 x 24-1/2 x 3-3/4	500	.34	19.34		406 x 635 x 102	9150	82.20
M1318244	18 x 24 x 4	17-1/2 x 23-1/2 x 3-3/4	500	.34	21.03		457 x 610 x 102	9150	82.20
M1320204	20 x 20 x 4	19-1/2 x 19-1/2 x 3-3/4	500	.34	18.52		508 x 508 x 102	9150	82.20
M1320244	20 x 24 x 4	19-3/8 x 23-3/8 x 3-3/4	500	.34	22.27		508 x 610 x 102	9150	82.20
M1320254	20 x 25 x 4	19-1/2 x 24-1/2 x 3-3/4	500	.34	23.20		508 x 635 x 102	9150	82.20
M1324244	24 x 24 x 4	23-3/8 x 23-3/8 x 3-3/4	500	.34	27.21		610 x 610 x 102	9150	82.20

Tolerances shall be +/- 1/8" for height, width and +/- 1/16" for depth. Recommended final resistance is 1.00" w.g.

Standard size 4" thick MR-13 pleated filters incorporate media separators.

79





"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

www.glasfloss.com · (214) 741-7056







STANDARD PRESSURE DROP

GLASFLOSS' COMMITMENT to GREEN



For years, Glasfloss has been designing air filtration products for maximum energy savings and environmental benefits in HVAC systems. Now more than ever, our commitment to Green products and manufacturing processes is at the heart of our company. For more information on Glasfloss Green products and LEED project certification options, please contact your Glasfloss Sales Representative.













"Serving You With Locations Throughout The Nation"




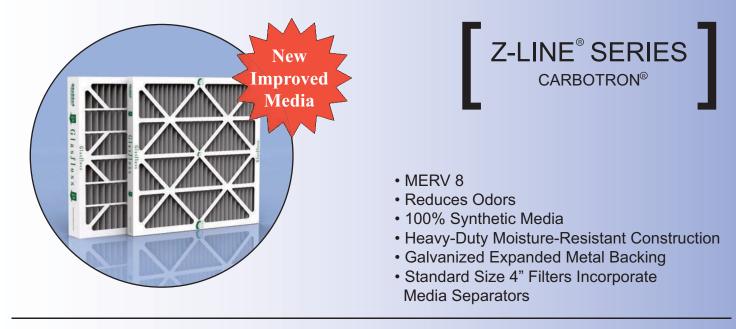



Cigarette smoke, vehicle exhaust, and cooking odors, along with thousands of other activities generate unpleasant odors. The solution to these problems and many offensive odors associated with Indoor Air Quality is the Z-Line Series Carbotron Pleat. The activated carbon used in the Carbotron Pleat has millions of tiny openings that adsorb odorous gas molecules from the air, so clean fresh smelling air remains. The Carbotron Pleat is offered in a wide range of standard and special sizes that allow installation in almost any Air Conditioning, Heating or Ventilating application.

The Glasfloss Z-Line Series Carbotron air filter is an extended-surface pleated-media type filter. The gradient density media combines particulate filtration with odor control in a single filter unit. The media shall be pleated in a tapered radial configuration. An expanded metal reinforcement shall be laminated to the air-exit side of the media by a thermo-setting adhesive to maintain continuity of the radial pleats. The expanded metal shall be galvanized to resist rust and corrosion. The pleated cartridge shall be bonded to the peripheral interior of the outer frame. A heavy-duty moisture-resistant beverage board shall be utilized for an encasing frame. The frame face shall be internally laminated to the pleated cartridge apexes. Z-Line Carbotron filters shall be rated to withstand temperatures of 180 degrees Fahrenheit. Z-Line Carbotron filters shall be rated under U.L. std. 900. The Z-Line Carbotron shall be rated MERV 8 when tested in accordance with the ANSI/ASHRAE 52.2 Test Standard. The recommended final pressure drop shall be 1.00" w.g.

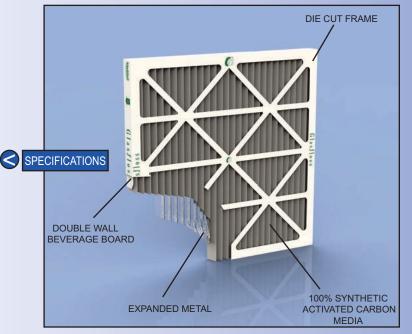

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com (214) 741-7056 PRODUCT BULLETIN 62LINE + SECTION 6 + 11-1-15



Z-LINE SERIES CARBOTRON STANDARD SIZE FILTERS

	SIZE W x H x D	SIZE W x H x D	RATED	INITIAL	MEDIA	SIZE	RATED	INITIAL
			VELOCITY	RESIST.	SQUARE	WxHxD	VELOCITY	
		EXACT	FPM	IN. W.G.	FEET	NOMINAL	M/H	PASCALS
	NOMINAL	LAACI	I'I IVI	IN. W.G.	FLLI		191/11	TASCALS
						MM		
ZLN101014AC	10 x 10 x 1	9-1/2 x 9-1/2 x 7/8	300	0.18	1.61	54 x 254 x 26	5490	52.2
ZLN102014AC	10 x 20 x 1	9-1/2 x 19-1/2 x 7/8	300	0.18	2.67	254 x 508 x 26	5490	52.2
ZLN102414AC	10 x 24 x 1	9-1/2 x 23-1/2 x 7/8	300	0.18	3.22	254 x 610 x 26	5490	52.2
ZLN103014AC	10 x 30 x 1	9-5/8 x 29-5/8 x 7/8	300	0.18	4.95	254 x 762 x 26	5490	52.2
ZLN121214AC	12 x 12 x 1	11-1/2 x 11-1/2 x 7/8	300	0.18	2.06	305 x 305 x 26	5490	52.2
ZLN122014AC	12 x 20 x 1	11-1/2 x 19-1/2 x 7/8	300	0.18	3.29	305 x 508 x 26	5490	52.2
ZLN122414AC	12 x 24 x 1	11-3/8 x 23-3/8 x 7/8	300	0.18	3.96	305 x 610 x 26	5490	52.2
ZLN122514AC	12 x 25 x 1	11-1/2 x 24-1/2 x 7/8	300	0.18	4.13	305 x 635 x 26	5490	52.2
ZLN123014AC	12 x 30 x 1	11-5/8 x 29-5/8 x 7/8	300	0.18	5.16	305 x 762 x 26	5490	52.2
ZLN141414AC	14 x 14 x 1	13-1/2 x 13-1/2 x 7/8	300	0.18	3.12	356 x 356 x 26	5490	52.2
ZLN142014AC	14 x 20 x 1	13-1/2 x 19-1/2 x 7/8	300	0.18	3.91	356 x 508 x 26	5490	52.2
ZLN142414AC	14 x 24 x 1	13-1/2 x 23-1/2 x 7/8	300	0.18	4.70	356 x 610 x 26	5490	52.2
ZLN142514AC	14 x 25 x 1	13-1/2 x 24-1/2 x 7/8	300	0.18	4.90	356 x 635 x 26	5490	52.2
ZLN143014AC	14 x 30 x 1	13 5/8 x 29-5/8 x 7/8	300	0.18	6.56	356 x 762 x 26	5490	52.2
ZLN152014AC	15 x 20 x 1	14-1/2 x 19-1/2 x 7/8	300	0.18	4.11	381 x 508 x 26	5490	52.2
	15 x 30-5/8 x 1	14-5/8 x 30-1/4 x 7/8	300	0.18	10.57	381 x 777 x 26	5490	52.2
ZLN1616144AC	16 x 16 x 1	15-1/2 x 15-1/2 x 7/8	300	0.18	3.45	406 x 406 x 26	5490	52.2
ZLN162014AC	16 x 20 x 1	15-1/2 x 19-1/2 x 7/8	300	0.18	4.32	406 x 508 x 26	5490	52.2
ZLN162414AC	16 x 24 x 1	15-1/2 x 23-1/2 x 7/8	300	0.18	5.20	406 x 610 x 26	5490	52.2
ZLN162514AC	16 x 25 x 1	15-1/2 x 24-1/2 x 7/8	300	0.18	5.41	406 x 635 x 26	5490	52.2
ZLN163014AC	16 x 30 x 1	15-5/8 x 29-5/8 x 7/8	300	0.18	6.67	406 x 762 x 26	5490	52.2
ZLN181814AC	18 x 18 x 1	17-1/2 x 17-1/2 x 7/8	300	0.18	4.44	457 x 457 x 26	5490	52.2
ZLN182014AC	18 x 20 x 1	17-1/2 x 19-1/2 x 7/8	300	0.18	4.94	457 x 508 x 26	5490	52.2
ZLN182414AC	18 x 24 x 1	17-1/2 x 23-1/2 x 7/8	300	0.18	5.94	457 x 610 x 26	5490	52.2
ZLN182514AC	18 x 25 x 1	17-1/2 x 24-1/2 x 7/8	300	0.18	6.19	457 x 635 x 26	5490	52.2
ZLN183014AC	18 x 30 x 1	17-1/2 x 17-1/2 x 7/8	300	0.18	8.23	457 x 762 x 26	5490	52.2
ZLN202014AC	20 x 20 x 1	19-1/2 x 19-1/2 x 7/8	300	0.18	5.55	508 x 508 x 26	5490	52.2
ZLN202214AC	20 x 22 x 1	19-1/2 x 21-7/8 x 7/8	300	0.18	6.15	508 x 558 x 26	5490	52.2
ZLN202414AC	20 x 24 x 1	19-3/8 x 23-3/8 x 7/8	300	0.18	6.68	508 x 610 x 26	5490	52.2
ZLN202514AC	20 x 25 x 1	19-1/2 x 24-1/2 x 7/8	300	0.18	6.96	508 x 635 x 26	5490	52.2
ZLN203014AC	20 x 30 x 1	19-5/8 x 29-5/8 x 7/8	300	0.18	8.23	508 x 726 x 26	5490	52.2
ZLN222214AC	22 x 22 x 1	21-1/2 x 21-1/2 x 7/8	300	0.18	7.17	558 x 558 x 26	5490	52.2
ZLN242414AC	24 x 24 x 1	23-3/8 x 23-3/8 x 7/8	300	0.18	7.92	610 x 610 x 26	5490	52.2
	24 x 30 x 1	23-5/8 x 29-5/8 x 7/8	300	0.18	9.90	610 x 762 x 26	5490	52.2
ZLN252514AC	25 x 25 x 1	24-1/2 x 24-1/2 x 7/8	300	0.18	8.51	635 x 635 x 26	5490	52.2
ZLN102024AC	10 x 20 x 2	9-1/2 x 19-1/2 x 1-3/4	500	0.27	6.24	254 x 508 x 51	9150	74.6
ZLN121224AC	12 x 12 x 2	11-1/2 x 11-1/2 x 1-3/4	500	0.27	4.33	305 x 305 x 51	9150	74.6
ZLN122024AC	12 x 20 x 2	11-3/8 x 23-3/8 x 1-3/4	500	0.27	7.20	305 x 508 x 51	9150	74.6
ZLN122424AC	12 x 24 x 2	11-3/8 x 23-3/8 x 1-3/4	500	0.27	8.66	305 x 610 x 51	9150	74.6
ZLN142024AC	14 x 20 x 2	13-1/2 x 19-1/2 x 1-3/4	500	0.27	8.64	356 x 508 x 51	9150	74.6
ZLN142524AC	14 x 25 x 2	13-1/2 x 24-1/2 x 1-3/4	500	0.27	10.83	356 x 635 x 51	9150	74.6
ZLN152024AC	15 x 20 x 2	14-1/2 x 19-1/2 x 1-3/4	500	0.27	9.12	381 x 508 x 51	9150	74.6
ZLN161624AC	16 x 16 x 2	15-1/2 x 15-1/2 x 1-3/4	500	0.27	7.66	406 x 406 x 51	9150	74.6
ZLN162024AC	16 x 20 x 2	15-1/2 x 19-1/2 x 1-3/4	500	0.27	9.60	406 x 508 x 51	9150	74.6
ZLN162424AC	16 x 24 x 2	15-1/2 x 23-1/2 x 1-3/4	500	0.27	11.55	406 x 610 x 51	9150	74.6
ZLN162524AC	16 x 25 x 2	15-1/2 x 24-1/2 x1-3/4	500	0.27	12.03	406 x 635 x 51	9150	74.6
ZLN181824AC	18 x 18 x 2	17-1/2 x 17-1/2 x 1-3/4	500	0.27	9.92	457 x 457 x 51	9150	74.6
ZLN182024AC	18 x 20 x 2	17-1/2 x 19-1/2 x 1-3/4	500	0.27	11.04	457 x 508 x 51	9150	74.6
ZLN182424AC	18 x 24 x 2	17-1/2 x 23-1/2 x 1-3/4	500	0.27	13.28	457 x 610 x 51	9150	74.6
ZLN182524AC	18 x 25 x 2	17-1/2 x 24-1/2 x 1-3/4	500	0.27	13.84	457 x 635 x 51	9150	74.6
ZLN202024AC	20 x 20 x 2	19-1/2 x 19-1/2 x 1-3/4	500	0.27	12.00	508 x 508 x 51	9150	74.6
	20 x 24 x 2	19-3/8 x 23-3/8 x 1-3/4	500	0.27	14.43	508 x 610 x 51	9150	74.6
ZLN202524AC	20 x 25 x 2	19-1/2 x 24-1/2 x 1-3/4	500	0.27	15.04	508 x 635 x 51	9150	74.6
	20 x 30 x 2	19-5/8 x 29-5/8 x 1-3/4	500	0.27	18.24	508 x 762 x 51	9150	74.6
ZLN242424AC	24 x 24 x 2	23-3/8 x 23-3/8 x 1-3/4	500	0.27	17.61	610 x 610 x 51	9150	74.6
ZLN252524AC	25 x 25 x 2	24-1/2 x 24-1/2 x 1-3/4	500	0.27	18.65	635 x 635 x 51	9150	

Tolerances shall be +/- 1/8" for height, width and +/- 1/16" for depth. Recommended final resistance is 1.00" w. g. All special sizes will be undersized by 1/8" unless specified otherwise.

"Serving You With Locations Throughout The Nation"



	SIZE W x H x D NOMINAL		RATED VELOCITY FPM	INITIAL RESIST. IN. W.G.	MEDIA SQUARE FEET		SIZE W x H x D NOMINAL MM	RATED VELOCITY M/H	INITIAL RESIST. PASCALS
ZLN122444AC	12 x 24 x 4	11-3/8 x 23-3/8 x 3-3/4	500	0.22	13.61	1 [305 x 610 x 102	9150	62.2
ZLN162044AC	16 x 20 x 4	15-1/2 x 19-1/2 x 3-3/4	500	0.22	15.43		406 x 508 x 102	9150	62.2
ZLN162544AC	16 x 25 x 4	15-1/2 x 24-1/2 x 3-3/4	500	0.22	19.34		406 x 635 x 102	9150	62.2
ZLN182444AC	18 x 24 x 4	17-1/2 x 23-1/2 x 3-3/4	500	0.22	21.03		457 x 610 x 102	9150	62.2
ZLN202044AC	20 x 20 x 4	19-1/2 x 19-1/2 x 3-3/4	500	0.22	18.52		508 x 508 x 102	9150	62.2
ZLN202444AC	20 x 24 x 4	19-3/8 x 23-3/8 x 3-3/4	500	0.22	22.27		508 x 610 x 102	9150	62.2
ZLN202544AC	20 x 25 x 4	19-1/2 x 24-1/2 x 3-3/4	500	0.22	23.20		508 x 635 x 102	9150	62.2
ZLN242444AC	24 x 24 x 4	23-3/8 x 23-3/8 x 3-3/4	500	0.22	27.21		610 x 610 x 102	9150	62.2

Tolerances shall be +/- 1/8" for height, width and +/- 1/16" for depth. Recommended final resistance is 1.00" w.g.


DEPTH	CARBOTRON
1"	16
2"	15
4"	11

Media Area to Face Area Ratio

DEPTH	CARBOTRON
1"	1.97
2"	4.40
4"	6.80


The Glasfloss Z-Line Carbotron pleated filter offers MERV 8 particulate filtration combined with odor control in a single unit. The Z-Line Carbotron pleated filter helps reduce unpleasant odors created by cooking, cigarette smoke and numerous other offensive airborne odors. The gradient density media is supported by a galvanized expanded metal that maintains the pleated media pack. The media pack is sealed with a heavy-duty beverage board, die-cut frame.

The Z-Line Carbotron is used in a wide range of residential, commercial and institutional applications and comes in a wide variety of standard and special sizes in 1", 2" and 4" depths. The Z-Line Carbotron is rated under U.L. std. 900.



MINIMUM PARTICLE SIZE EFFICIENCY

Test Filter Size 24" x 24" x 2" Nominal



"Serving You With Locations Throughout The Nation"

G Glasfloss

THE CLEAR CHOICE SINCE 1936

 \bigcirc

Z-LINE SERIES CARBOTRON FEATURES

- MERV 8
- · Increased Initial Efficiency
- · Activated Carbon Reduces Odors
- High Dust-Holding Capacity
- Thermally- Bonded 100% Synthetic Fibers
- · Heavy-duty Beverage Board Frame Construction
- Wide Range of Standard & Special Sizes
- · Rated under U.L. std. 900


Distributed by:





"Serving You With Locations Throughout The Nation"






Z-LINE[®] SERIES XM Pleated Filters

- MERV 10 & MERV 11 Performances
- Designed for Higher Air Volume Systems
- Higher Breach Strength
- Heavy-Duty Moisture Resistant Construction
- Extra Heavy-Duty Galvanized Metal Backing
- Standard 1", 2" & 4" Sizes

The Glasfloss Z-Line Series HVXM and MR11XM pleated filters offer superior integrity construction for higher velocity applications. The Z-Line Series HVXM and MR11XM incorporate 100% synthetic media that will not absorb moisture and will not support microbial growth. The extra heavy-duty galvanized expanded metal which incorporates approximately 75% more support provides robust performance under higher air velocity applications.

Glasfloss Z-Line Series HVXM and MR11XM air filters shall be of the extended-surface pleated-media type. The media utilized shall be made of 100% synthetic fibers. The media shall be pleated in a tapered radial configuration. An extra heavy duty, recycled expanded metal reinforcement shall be laminated to the air-exit side of the media by a thermo-setting adhesive to maintain continuity of the radial pleats. The expanded metal shall be galvanized to resist rust and corrosion. The pleated cartridge shall be bonded to the peripheral interior of the outer frame. A heavyduty moisture-resistant beverage board incorporating post-consumer material shall be utilized for an encasing frame. The frame face shall be internally laminated to the pleated cartridge apexes. The Glasfloss Z-Line Series HVXM shall achieve a MERV 10 and MR11XM shall achieve a MERV 11 per the ANSI/ASHRAE 52.2 Test Standard. Glasfloss Z-Line Series HVXM and MR11XM filters shall be classified under U.L. std. 900 and shall be rated to withstand temperatures up to 180 degrees Fahrenheit.

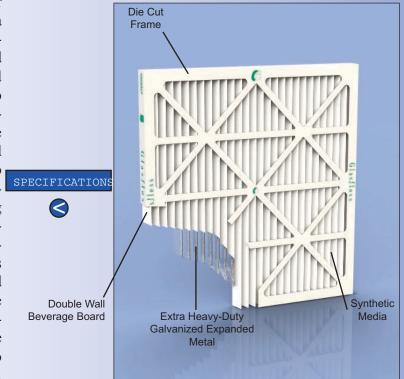

"Serving You With Locations Throughout The Nation"

(>)

FEATURES


Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com · (214) 741-7056
PRODUCT BULLETIN 6XM · SECTION 6 · 2-4-2022



Z-LINE SERIES HVXM & MR11XM STANDARD SIZES

SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	RE IN.	TIAL SIST. W.G.	MEDIA SQUARE FEET	SIZE W x H x D NOMINAL MM	RATED VELOCITY M/H	RE	TIAL SIST. CALS MR11XM
			HVXM	MR11XM		IVIIVI		HVAM	MRIIXM
10 x 10 x 1	9-1/2 x 9-1/2 x 7/8	300	.18	.24	1.61	254 x 254 x 26	5490	44.8	59.7
10 x 20 x 1	9-1/2 x 19-1/2 x 7/8	300	.18	.24	2.67	254 x 508 x 26	5490	44.8	59.7
10 x 24 x 1	9-1/2 x 23-1/2 x 7/8	300	.18	.24	3.22	254 x 610 x 26	5490	44.8	59.7
10 x 30 x 1	9-5/8 x 29-5/8 x 7/8	300	.18	.24	4.95	254 x 762 x 26	5490	44.8	59.7
12 x 12 x 1	11-1/2 x 11 1/2 x 7/8	300	.18	.24	2.06	305 x 305 x 26	5490	44.8	59.7
12 x 20 x 1	11-1/2 x 19-1/2 x 7/8	300	.18	.24	3.29	305 x 508 x 26	5490	44.8	59.7
12 x 24 x 1	11-3/8 x 23-3/8 x 7/8	300	.18	.24	3.96	305 x 610 x 26	5490	44.8	59.7
12 x 25 x 1	11-1/2 x 24-1/2 x 7/8	300	.18	.24	4.13	305 x 635 x 26	5490	44.8	59.7
12 x 30 x 1	11-5/8 x 29-1/2 x 7/8	300	.18	.24	5.16	305 x 762 x 26	5490	44.8	59.7
14 x 14 x 1	13-1/2 x 13-1/2 x 7/8	300	.18	.24	3.12	356 x 356 x 26	5490	44.8	59.7
14 x 20 x 1	13-1/2 x 19-1/2 x 7/8	300	.18	.24	3.91	356 x 508 x 26	5490	44.8	59.7
14 x 24 x 1	13 1/2 x 23 1/2 x 7/8	300	.18	.24	4.70	356 x 610 x 26	5490	44.8	59.7
14 x 25 x 1	13-1/2 x 24-1/2 x 7/8	300	.18	.24	4.90	356 x 635 x 26	5490	44.8	59.7
14 x 30 x 1	13 5/8 x 29 5/8 x 7/8	300	.18	.24	6.56	356 x 762 x 26	5490	44.8	59.7
15 x 20 x 1	14-1/2 x 19-1/2 x 7/8	300	.18	.24	4.11	381 x 508 x 26	5490	44.8	59.7
15 x 30-5/8 x 1	14-5/8 x 30-1/4 x 7/8	300	.18	.24	10.57	381 x 778 x 26	5490	44.8	59.7
16 x 16 x 1	15-1/2 x 15-1/2 x 7/8	300	.18	.24	3.45	407 x 407 x 26	5490	44.8	59.7
16 x 20 x 1	15-1/2 x 19-1/2 x 7/8	300	.18	.24	4.32	407 x 508 x 26	5490	44.8	59.7
16 x 24 x 1	15-1/2 x 23-1/2 x 7/8	300	.18	.24	5.20	407 x 610 x 26	5490	44.8	59.7
16 x 25 x 1	15-1/2 x 24-1/2 x 7/8	300	.18	.24	5.41	407 x 635 x 26	5490	44.8	59.7
16 x 30 x 1	15-5/8 x 29-5/8 x 7/8	300	.18	.24	6.67	407 x 762 x 26	5490	44.8	59.7
18 x 18 x 1	17-1/2 x 17-1/2 x 7/8	300	.18	.24	4.44	457 x 457 x 26	5490	44.8	59.7
18 x 20 x 1	17-1/2 x 19-1/2 x 7/8	300	.18	.24	4.94	457 x 508 x 26	5490	44.8	59.7
18 x 24 x 1	17-1/2 x 23-1/2 x 7/8	300	.18	.24	5.94	457 x 610 x 26	5490	44.8	59.7
18 x 25 x 1	17-1/2 x 24-1/2 x 7/8	300	.18	.24	6.19	457 x 635 x 26	5490	44.8	59.7
18 x 30 x 1	17-5/8 x 29-5/8 x 7/8	300	.18	.24	8.23	457 x 762 x 26	5490	44.8	59.7
20 x 20 x 1	19-1/2 x 19-1/2 x 7/8	300	.18	.24	5.55	508 x 508 x 26	5490	44.8	59.7
20 x 22 x 1	19-1/2 x 21-7/8 x 7/8	300	.18	.24	6.15	508 x 508 x 26	5490	44.8	59.7
20 x 24 x 1	19-3/8 x 23-3/8 x 7/8	300	.18	.24	6.68	508 x 610 x 26	5490	44.8	59.7
20 x 25 x 1	19-1/2 x 24-1/2 x 7/8	300	.18	.24	6.96	508 x 635 x 26	5490	44.8	59.7
20 x 30 x 1	19-5/8 x 29-5/8 x 7/8	300	.18	.24	8.23	508 x 762 x 26	5490	44.8	59.7
22 x 22 x 1	21-1/2 x 21-1/2 x 7/8	300	.18	.24	7.17	508 x 508 x 26	5490	44.8	59.7
24 x 24 x 1	23-3/8 x 23-3/8 x 7/8	300	.18	.24	7.92	610 x 610 x 26	5490	44.8	59.7
24 x 30 x 1	23-5/8 x 29-5/8 x 7/8	300	.18	.24	9.90	610 x 762 x 26	5490	44.8	59.7
25 x 25 x 1	24-1/2 x 24-1/2 x 7/8	300	.18	.24	8.51	635 x 635 x 26	5490	44.8	59.7

Tolerances shall be +/- 1/8" for height, width and +/- 1/16" for depth. Recommended final resistance is 1.00" w.g.



PRESSURE DROP


"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

Z-LINE SERIES HVXM & MR11XM STANDARD SIZES


SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	RE	TIAL SIST. W.G.	MEDIA SQUARE FEET	SIZE W x H x D NOMINAL	RATED VELOCITY M/H	INIT RES PASC	IST.
			HVXM	MR11XM		MM		HVXM	MR11XM
10 x 20 x 2	9-1/2 x 19-1/2 x 1-3/4	500	.27	.31	6.24	254 x 508 x 51	9150	67.25	77.22
12 x 12 x 2	11-1/2 x 11-1/2 x 1-3/4	500	.27	.31	4.33	305 x 305 x 51	9150	67.25	77.22
12 x 20 x 2	11-1/2 x 19-1/2 x 1-3/4	500	.27	.31	7.20	305 x 508 x 51	9150	67.25	77.22
12 x 24 x 2	11-3/8 x 23-3/8 x 1-3/4	500	.27	.31	8.66	305 x 610 x 51	9150	67.25	77.22
14 x 20 x 2	13-1/2 x 19-1/2 x 1-3/4	500	.27	.31	8.64	356 x 508 x 51	9150	67.25	77.22
14 x 25 x 2	13-1/2 x 24-1/2 x 1-3/4	500	.27	.31	10.83	356 x 635 x 51	9150	67.25	77.22
15 x 20 x 2	14-1/2 x 19-1/2 x 1-3/4	500	.27	.31	9.12	381 x 508 x 51	9150	67.25	77.22
16 x 16 x 2	15-1/2 x 15-1/2 x 1-3/4	500	.27	.31	7.66	406 x 406 x 51	9150	67.25	77.22
16 x 20 x 2	15-1/2 x 19-1/2 x 1-3/4	500	.27	.31	9.60	406 x 508 x 51	9150	67.25	77.22
16 x 24 x 2	15-1/2 x 23-1/2 x 1-3/4	500	.27	.31	11.55	406 x 610 x 51	9150	67.25	77.22
16 x 25 x 2	15-1/2 x 24-1/2 x 1-3/4	500	.27	.31	12.03	406 x 635 x 51	9150	67.25	77.22
18 x 18 x 2	17-1/2 x 17-1/2 x 1-3/4	500	.27	.31	9.92	457 x 457 x 51	9150	67.25	77.22
18 x 20 x 2	17-1/2 x 19-1/2 x 1-3/4	500	.27	.31	11.04	457 x 508 x 51	9150	67.25	77.22
18 x 24 x 2	17-1/2 x 23-1/2 x 1-3/4	500	.27	.31	13.28	457 x 610 x 51	9150	67.25	77.22
18 x 25 x 2	17-1/2 x 24-1/2 x 1-3/4	500	.27	.31	13.84	457 x 635 x 51	9150	67.25	77.22
20 x 20 x 2	19-1/2 x 19-1/2 x 1-3/4	500	.27	.31	12.00	508 x 508 x 51	9150	67.25	77.22
20 x 24 x 2	19-3/8 x 23-3/8 x 1-3/4	500	.27	.31	14.43	508 x 610 x 51	9150	67.25	77.22
20 x 25 x 2	19-1/2 x 24-1/2 x 1-3/4	500	.27	.31	15.04	508 x 635 x 51	9150	67.25	77.22
20 x 30 x 2	19-5/8 x 29-5/8 x 1-3/4	500	.27	.31	18.24	508 x 762 x 51	9150	67.25	77.22
24 x 24 x 2	23-3/8 x 23-3/8 x 1-3/4	500	.27	.31	17.61	610 x 610 x 51	9150	67.25	77.22
25 x 25 x 2	24-1/2 x 24-1/2 x 1-3/4	500	.27	.31	18.65	635 x 635 x 51	9150	67.25	77.22
12 x 24 x 4	11-3/8 x 23-3/8 x 3-3/4	500	.22	.25	13.61	457 x 610 x 102	9150	54.80	62.27
16 x 20 x 4	15-1/2 x 19-1/2 x 3-3/4	500	.22	.25	15.43	406 x 508 x 102	9150	54.80	62.27
16 x 25 x 4	15-1/2 x 24-1/2 x 3-3/4	500	.22	.25	19.34	406 x 635 x 102	9150	54.80	62.27
18 x 24 x 4	17-1/2 x 23-1/2 x 3-3/4	500	.22	.25	21.03	457 x 610 x 102	9150	54.80	62.27
20 x 20 x 4	19-1/2 x 19-1/2 x 3-3/4	500	.22	.25	18.52	508 x 508 x 102	9150	54.80	62.27
20 x 24 x 4	19-3/8 x 23-3/8 x 3-3/4	500	.22	.25	22.27	508 x 610 x 102	9150	54.80	62.27
20 x 25 x 4	19-1/2 x 24-1/2 x 3-3/4	500	.22	.25	23.20	508 x 635 x 102	9150	54.80	62.27
24 x 24 x 4	23-3/8 x 23-3/8 x 3-3/4	500	.22	.25	27.21	610 x 610 x 102	9150	54.80	62.27

Tolerances shall be +/- 1/8" for height, width and +/- 1/16" for depth. Recommended final resistance is 1.00" w.g.

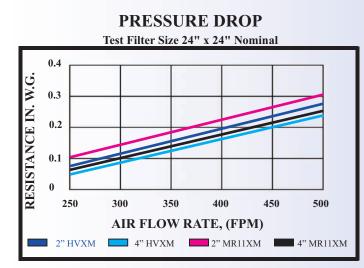

MINIMUM PARTICLE SIZE EFFICIENCY

Test Filter Size 24" x 24" x 2" Nominal




"Serving You With Locations Throughout The Nation"



Z-LINE[®] SERIES **XM Pleated Filters**

- MERV 10 & MERV 11 Performances
- Designed for Higher Air Volume Systems
- Higher Breach Strength
- Heavy-Duty Moisture Resistant Construction
- Extra Heavy-Duty Galvanized Metal Backing
- Standard 1", 2" & 4" Sizes

Standard size 4" thick XM pleated filters incorporate media separators.



Glasfloss Industries incorporates color-coded carton labels on standard sizes to help identify the product, which enhance warehouse operations and shipments.





Glasfloss manufactures a variety of medium and high efficiency air filters which can be specified for LEED certification applications. For specific information on these products, please contact your local Glasfloss Sales Representative.





Distributed by:






"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.



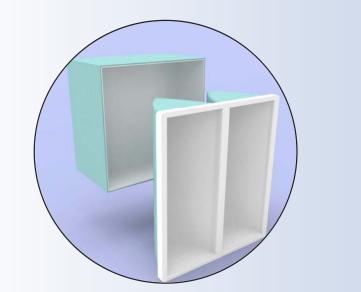

QUAD & CUBE FILTERS

- Versatile, Self-Seal Design
- Heavy-Duty Construction
- High Moisture Resitance and Durability

FEATURES (>) The Glasfloss line of polyester bag filters offers medium efficiency in a wide range of applications. The rigid, self-seal design of these filters helps prevent air bypass and allows the filters to operate under adverse conditions, especially where high humidity is present. The Glasfloss Quad 440 features a two-stage 100% nonwoven green/white polyester media for maximum efficiency and service life. The open fibers on the intake layer catch the larger particles allowing the finer particles to be caught by the dense outflow layer. The Glasfloss Quad 420 yellow media is less restrictive to airflow and performs well in moderate dust loading applications. Glasfloss Cube Filters feature the same two-stage polyester media found in the Quad 440 and are available in regular, internal supported and unitized construction. Glasfloss Quad & Cube Filters perform well in both variable and constant volume systems.

Quad 440 & 420 extended surface air filters shall be manufactured of 100% non-woven polyester. The air entering side shall be a highly lofted, coarse fiber, designed to facilitate the depth loading of dirt particles, thus acting as an integral prefilter for the more dense second stage. The air leaving side shall incorporate a skin backing. The filter shall be manufactured to fit existing hardware and shall retain rigidity under varying air volumes. The outer and center edges of the individual pockets shall be thermally sealed. The pockets are sewn together and supported by a heavy-duty cross wire, which insures maximum rigidity and eliminates the possibility of element detachment. There shall be sufficient media overlap to ensure a positive seal between the filter and holding frame, eliminating the possibility of air bypass and the need for supplemental gasketing. All filters shall incorporate media that is classified under U.L. std. 900. The Quad 440 shall achieve a MERV 7 rating when tested in accordance with the ANSI/ASHRAE 52.2 Test Standard.



"Serving You With Locations Throughout The Nation"



SIZE SIZE RATED INITIAL MEDIA SIZE RATED INITIAL BASE MODEL WxHxD WxHxD VELOCITY **RESIST.** SOUARE WxHxD VELOCITY RESIST. PASCALS NOMINAL NUMBER NOMINAL EXACT FPM IN. W.G. FEET M/H 420 440 420 440 MM QAD122415 12 x 24 x 15 11-3/8 x 23-3/8 x 14-7/8 500 13.70 305 x 610 x 381 5150 39.8 62.2 .16 .18 QAD162015 16 x 20 x 15 15-1/2 x 19-1/2 x 14-7/8 500 .18 11.90 406 x 508 x 381 5150 39.8 62.2 .16 QAD162515 16 x 25 x 15 15-1/2 x 24-1/2 x 14-7/8 500 .16 .18 15.20 406 x 635 x 381 5150 39.8 62.2 QAD202015 20 x 20 x 15 19-1/2 x 19-1/2 x 14-7/8 500 .16 .18 12.70 508 x 508 x 381 5150 39.8 62.2 QAD202415 20 x 24 x 15 19-1/2 x 23-1/2 x 14-7/8 500 14.70 5150 62.2 .16 .18 508 x 610 x 381 39.8 500 .16 508 x 635 x 381 39.8 OAD202515 20 x 25 x 15 19-1/2 x 24-1/2 x 14-7/8 .18 15.20 5150 62.2 QAD242415 24 x 24 x 15 23-3/8 x 23-3/8 x 14-7/8 500 .16 .18 15.60 610 x 610 x 381 5150 39.8 62.2

QUAD 440 & 420 FILTERS

Tolerances shall be +/- 1/16" for width and height.

POLY CUBE FILTERS

_	SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	INITIAL RESIST. IN. W.G.	MEDIA SQUARE FEET	Wx	IZE x H x D MINAL	RATED VELOCITY M/H	INITIAL RESIST. PASCALS
					Std. Unit.		MM		
QUB12248	12 x 24 x 8	11-3/8 x 23-3/8 x 7-7/8	500	.23	7.00	305 x	610 x 203	5150	57.22
QUB16208	16 x 20 x 8	15-1/2 x 19-1/2 x 7-7/8	500	.23	7.22	406 x	508 x 203	5150	57.22
QUB16258	16 x 25 x 8	15-1/2 x 24-1/2 x 7-7/8	500	.23	8.47	406 x	635 x 203	5150	57.22
QUB20208	20 x 20 x 8	19-1/2 x 19-1/2 x 7-7/8	500	.23	8.33	508 x	508 x 203	5150	57.22
QUB20258	20 x 25 x 8	19-1/2 x 24-1/2 x 7-7/8	500	.23	9.72	508 x	635 x 203	5150	57.22
QUB24248	24 x 24 x 8	23-3/8 x 23-3/8 x 7-7/8	500	.23	10.67	610 x	610 x 203	5150	57.22
QUB122411	12 x 24 x 11	11-3/8 x 23-3/8 x 10-7/8	500	.22	8.50	305 x	610 x 280	5150	54.73
QUB162011	16 x 20 x 11	15-1/2 x 19-1/2 x 10-7/8	500	.22	8.72	406 x	508 x 280	5150	54.73
QUB162511	16 x 25 x 11	15-1/2 x 24-1/2 x 10-7/8	500	.22	10.18	406 x	635 x 280	5150	54.73
QUB202011	20 x 20 x 11	19-1/2 x 19-1/2 x 10-7/8	500	.22	10.00	508 x	508 x 280	5150	54.73
QUB202511	20 x 25 x 11	19-1/2 x 24-1/2 x 10-7/8	500	.22	11.60	508 x	635 x 280	5150	54.73
QUB242411	24 x 24 x 11	23-3/8 x 23-3/8 x 10-7/8	500	.22	12.67	610 x	610 x 280	5150	54.73
QUB122420	12 x 24 x 20	11-3/8 x 23-3/8 x 19-7/8	500	.20	13.00	305 x	610 x 508	5150	49.76
QUB162020	16 x 20 x 20	15-1/2 x 19-1/2 x 19-7/8	500	.20	13.22	406 x	508 x 508	5150	49.76
QUB162520	16 x 25 x 20	15-1/2 x 24-1/2 x 19-7/8	500	.20	15.31	406 x	635 x 508	5150	49.76
QUB202020	20 x 20 x 20	19-1/2 x 19-1/2 x 19-7/8	500	.20	15.00	508 x	508 x 508	5150	49.76
QUB202520	20 x 25 x 20	19-1/2 x 24-1/2 x 19-7/8	500	.20	17.22	508 x	635 x 508	5150	49.76
QUB242420	24 x 24 x 20	23-3/8 x 23-3/8 x 19-7/8	500	.20	18.67	610 x	610 x 508	5150	49.76

Tolerances shall be +/- 1/16" for width and height. Recommended final resistance is 1.00" w.g.

UNITIZED POLY CUBE FILTERS

BASE MODEL NUMBER	SIZE W x H x D NOMINAL		RATE D VEL. FPM	INITIAL RESIST. IN. W.G.	MEDIA SQUARE FEET	SIZE W x H x D NOMINAL MM	RATED VELOCITY M/H	INITIAL RESIST. PASCALS
QUB1224154USS	12 x 24 x 15	11-3/8 x 23-3/8 x 14-7/8	500	.20	8.50	305 x 610 x 381	5150	49.76
QUB1620154USS	16 x 20 x 15	15-1/2 x 19-1/2 x 14-7/8	500	.20	8.50	406 x 508 x 381	5150	49.76
QUB1625154USS	16 x 25 x 15	15-1/2 x 24-1/2 x 14-7/8	500	.20	9.68	406 x 635 x 381	5150	49.76
QUB2020154USS	20 x 20 x 15	19-1/2 x 19-1/2 x 14-7/8	500	.20	9.44	508 x 508 x 381	5150	49.76
QUB2024154USS	20 x 24 x 15	19-1/2 x 23-3/8 x 14-7/8	500	.20	10.39	508 x 610 x 280	5150	49.76
QUB2025154USS	20 x 25 x 15	19-1/2 x 24-1/2 x 14-7/8	500	.20	10.63	508 x 635 x 381	5150	49.76
QUB2424154USS	24 x 24 x 15	23-3/8 x 23-3/8 x 14-7/8	500	.20	11.33	610 x 610 x 381	5150	49.76

Tolerances shall be +/- 1/16" for width and height. Recommended final resistance is 1.00" w.g.


"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.




SPECIFICATIONS FOR CUBE FILTERS


Glasfloss Standard, Internal Supported and Unitized Cubes shall be made from 100% non-woven polyester fibers. The uniform fiber orientation and graduated density lends itself to greater depth loading and higher arrestance. The air entering side shall be a highly lofted, coarse fiber, designed to facilitate the depth loading of dirt particles, thus acting as an integral prefilter for the more dense second stage. The air leaving side shall incorporate a skin backing. Glasfloss Cubes shall be green and white in color, white being the air entry side. There shall be a skin backing on the air leaving side. Internal Supported and Unitized Cubes are constructed using a heavy gauge wire support frame. The media blanket completely encloses the perimeter wire and offers a self-sealing, self-supporting filter. Standard, Internal Supported and Unitized Cubes are engineered for use in temperatures up to 250 degrees Fahrenheit (121 degrees Celsius). Glasfloss Cubes achieve a MERV 7 rating when tested in accordance with the ANSI/ASHRAE 52.2 Test Standard.

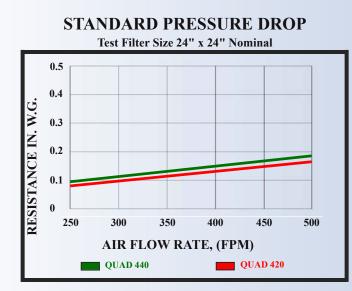

STANDARD PRESSURE DROP Test Filter Size 24" x 24" Nominal




MINIMUM PARTICLE SIZE EFFICIENCY Test Filter Size 24" x 24" Nominal



MINIMUM PARTICLE SIZE EFFICIENCY

Test Filter Size 24" x 24" Nominal




"Serving You With Locations Throughout The Nation"



ADE IN

THE CLEAR CHOICE SINCE 1936

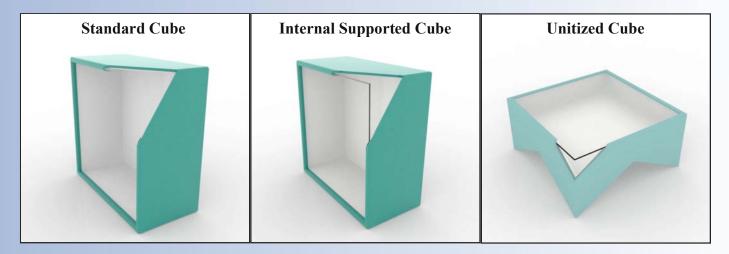

Quads - Glasfloss Quad 440 and Quad 420 filters are made with 100% non-woven polyester media. Glasfloss Quad 440 features a special, two-stage green/white media and Quad 420 features a dual-textured fiber blend yellow media. A header option is also available.

Cubes - Glasfloss Cube filters are made with a twostage 100% non-woven polyster media. The seams of all Glasfloss Cubes are sewn together for maximum durability. The Internal Supported Cubes use a heavyduty CONSTRUCTION

These versatile air filters can be used in a wide range of industrial and commercial applications, both as primary filters and pre-filters to more efficient final filters. Their self-seal design and high dust-holding capacity make them a good choice for automatic roll conversions. Glasfloss Quad and Cube filters are also ideal for highmoisture applications, and they perform well in variable air volume systems.

APPLICATIONS





"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.








Glasfloss Excel and Purapak extended surface bag filters offer excellent performance and durability for applications requiring medium to high efficiencies. The Excel bag filter features 100% synthetic media and offers excellent value and performance for most applications. The Purapak bag filter features ultrafine fiberglass media and is ideal for applications where fiberglass is specified. Both the Excel and Purapak bag filters feature an exclusive internal header design which adds strength to the filters and virtually eliminates "racking" during installation. ANSI/ASHRAE 52.2 test method performance ranges include MERV 9 (40-45%), MERV 11 (60-65%), MERV 13 (80-85%) and MERV 15 (90-95%). Glasfloss Excel and Purapak bag filters are available in most standard and special-size face dimensions in standard and special depths.

The Glasfloss Excel extended surface bag filter shall incorporate an ultra-fine, dual ply 100% synthetic media. The Glasfloss Purapak extended surface bag filter shall incorporate an ultra-fine fiberglass media. Individual pockets shall be formed by span stitching down the length of the pockets to maximize the utilization of media. The stitching shall be coated with a thin line of hot melt adhesive to secure the thread to the media and seal any perforations in the media caused by sewing. The pockets shall be individually adhered to an internal aluminum tube header. Each individual pocket shall be fastened to the next by means of pocket support ribs, which are mechanically attached to the internal header. The entire assembly shall be encased in a galvanized steel header frame to prevent racking and possible bypass of unfiltered air. Glasfloss Excel and Purapak filters shall be Classified under U.L. standard 900. Excel and Purapak filters shall be rated to withstand temperatures up to 160 degrees Fahrenheit.

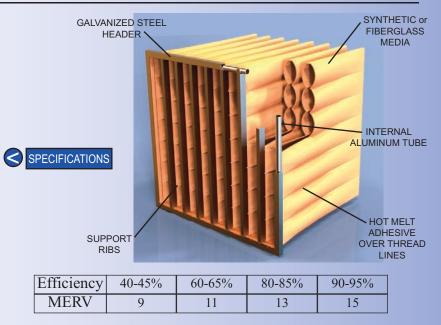

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com • (214) 741-7056 PRODUCT BULLETIN 8BAG • SECTION 8 • 7-18-16

Glasfloss

THE CLEAR CHOICE SINCE 1936

I	EXCEL					0-959 ERV		80-85% MERV 13			60-65% MERV 11			40-45% MERV 9				
SIZE W x H x D NOMINAL	PKT NO.		IR FLO APACI CFM		F	INITIAL RESIST. IN. W.G.		F	INITIAL RESIST. IN. W.G.			INITIAL RESIST. IN. W.G.			NITIA RESIST N. W.C	г. 📗	MEDIA SQUARE FEET	SIZE W x H x D NOMINAL MM
24 x 24 x 15	6	1000	1250	1500	.45	.55	.66	.37	.46	.55	.31	.38	.46	.25	.32	.38	35.75	610 x 610 x 381
24 x 24 x 15 24 x 24 x 15	7 8	1000 1000	1250 1250	1500 1500	.42 .37	.51 .47	.62 .60	.35 .31	.43 .40	.52 .50	.29 .26	.35 .33	.43 .42	.24 .21	.29 .27	.36 .34	41.71 47.66	610 x 610 x 381 610 x 610 x 381
24 x 24 x 15	10	1000	1250	1500	.34	.40	.53	.28	.34	.45	.24	.28	.37	-	-	-	59.58	610 x 610 x 381
24 x 24 x 15	12	1000	1250	1500	.27	.33	.47	.22	.28	.40	.19	.23	.33	-	-	-	71.50	610 x 610 x 381
24 x 24 x 21 24 x 24 x 21	6 8	1000 1000	1250 1500	1500 2000	.38 .34	.50 .46	.57 .56	.32 .28	.42 .39	.48 .47	.27 .24	.35 .32	.40 .39	.22 .19	.28 .26	.33 .32	48.75 65.00	610 x 610 x 533 610 x 610 x 533
24 x 24 x 21 24 x 24 x 21	10	1000	1500	2000	.34	.40	.50	.26	.39	.47	.24	.32	.39	.19	.20	.32	81.25	610 x 610 x 533
24 x 24 x 25	6	1000	1500	2000	.28	.49	.61	.24	.41	.51	.20	.34	.42	-	-	-	57.41	610 x 610 x 635
24 x 24 x 25	8	1000	1500	2000	.20	.36	.53	.17	.31	.44	.14	.25	.37	-	-	-	76.55	610 x 610 x 635
24 x 24 x 25 24 x 24 x 29	10 6	1500 1500	2000 2000	2500 2500	.26 .45	.45	.59 .66	.22	.37	.49 .55	.18	.31	.41	-	-	-	95.69 66.08	610 x 610 x 635 610 x 610 x 737
24 x 24 x 29 24 x 24 x 29	8	1500	2000	2500	.45	.33	.00	.30	.40	.35	.32	.30	.40	.20	.27		88.11	610 x 610 x 737
24 x 24 x 29	10	1500	2000	2500	.22	.36	.52	.19	.31	.43	.16	.25	.36	-	-	-	110.13	610 x 610 x 737
24 x 24 x 36	6	1500	2000	2500	.34	.51	.64	.28	.43	.54	.24	.35	.45	-	-	-	81.25	610 x 610 x 914
24 x 24 x 36	8	1500	2000 2000	2500 2500	.26	.43 .34	.54 .47	.22	.36 .28	.46	.18	.30 .24	.38	-	-	-	108.83	610 x 610 x 914
24 x 24 x 36 20 x 24 x 15	10 6	1500 850	1050	12500	.20	.55	.47	.16	.28	.40	.14	.24	.33	.25	.32	.38	135.41 35.75	610 x 610 x 914 508 x 610 x 381
20 x 24 x 15	8	850	1050	1250	.37	.47	.60	.31	.40	.50	.26	.33	.42	.21	.27	.34	47.66	508 x 610 x 381
20 x 24 x 15	10	850	1050	1250	.34	.40	.53	.28	.34	.45	.24	.28	.37	.19	.23	.31	59.58	508 x 610 x 381
20 x 24 x 21	6	850	1050	1250	.38	.50	.57	.32	.42	.48	.27	.35	.40	.22	.28	.33	48.75	508 x 610 x 533
20 x 24 x 21 20 x 24 x 21	8 10	850 850	1250 1250	1650 1650	.34	.46 .40	.56 .52	.28 .25	.39 .34	.47 .43	.24	.32 .28	.39 .36	.19 .17	.26 .23	.32 .30	65.00 81.25	508 x 610 x 533 508 x 610 x 533
20 x 24 x 21 20 x 24 x 25	6	850	1250	1650	.28	.40	.61	.24	.41	.51	.20	.34	.42			50	57.41	508 x 610 x 533
20 x 24 x 25	8	850	1250	1650	.20	.36	.53	.17	.31	.44	.14	.25	.37	-	-	-	76.55	508 x 610 x 533
20 x 24 x 25	10	1250	1650	2100	.26	.45	.59	.22	.37	.49	.18	.31	.41	-	-	-	95.69	508 x 610 x 533
20 x 24 x 29 20 x 24 x 29	6 8	1250 1250	1650 1650	2100 2100	.45 .35	.55 .44	.66 .55	.38 .29	.46 .37	.55 .46	.32 .24	.38 .30	.46 .38	-	-	-	66.08 88.11	508 x 610 x 737
20 x 24 x 29 20 x 24 x 29	10	1250	1650	2100	.33	.44	.53	.19	.37	.40	.24	.30	.36	-	_		110.13	508 x 610 x 737 508 x 610 x 737
20 x 24 x 36	6	1250	1650	2100	.34	.50	.64	.28	.43	.54	.24	.35	.45	-	-	-	81.25	508 x 610 x 914
20 x 24 x 36	8	1250	1650	2100	.26	.43	.54	.22	.36	.46	.18	.30	.38	-	-	-	108.83	508 x 610 x 914
20 x 24 x 36	10	1250	1650	2100	.20	.34	.47	.16	.28	.40	.14	.24	.33	-	-	-	135.41	508 x 610 x 914
12 x 24 x 15 12 x 24 x 15	3 4	500 500	625 625	750 750	.45 .37	.55 .47	.66 .60	.37	.46 .40	.55 .50	.31 .26	.38 .33	.46 .42	.25 .21	.32 .27	.38 .34	17.87 23.83	305 x 610 x 381 305 x 610 x 381
$12 \times 24 \times 15$ $12 \times 24 \times 15$	5	500	625	750	.34	.40	.53	.28	.34	.45	.24	.28	.37	.19	.23	.31	29.79	305 x 610 x 381
12 x 24 x 15	6	500	625	750	.27	.33	.47	.22	.28	.40	.19	.23	.33	.15	.19	.27	35.75	305 x 610 x 381
12 x 24 x 21	3	500	625	750	.38	.50	.57	.32	.42	.48	.27	.35	.40	.22	.28	.33	24.37	305 x 610 x 533
12 x 24 x 21 12 x 24 x 21	4 5	500 500	750 750	1000 1000	.34 .30	.46 .40	.56 .52	.28 .25	.39 .34	.47 .43	.24	.32 .28	.39 .36	.19 .17	.26 .23	.32 .30	32.50 40.63	305 x 610 x 533 305 x 610 x 533
$12 \times 24 \times 21$ 12 x 24 x 25	3	500	750	1000	.28	.40	.52	.23	.34	.43	.21	.28	.30		.23	.30	28.70	305 x 610 x 635
12 x 24 x 25	4	500	750	1000	.20	.36	.53	.17	.31	.44	.14	.25	.37	-	-	-	38.27	305 x 610 x 635
12 x 24 x 25	5	750	1000	1250	.26	.45	.59	.22	.37	.49	.18	.31	.41	-	-	-	47.84	305 x 610 x 635
12 x 24 x 29 12 x 24 x 29	3 4	750 750	1000 1000	1250 1250	.45 .35	.55 .44	.66 .55	.38 .29	.46 .37	.55 .46	.32 .24	.38 .30	.46 .38	-	-	-	33.04 44.05	305 x 610 x 737 305 x 610 x 737
12 x 24 x 29 12 x 24 x 29	4 5	750	1000	1250	.35	.44	.55	.29	.37	.40	.24	.30	.38	1	-		44.05 55.07	305 x 610 x 737 305 x 610 x 737
12 x 24 x 36	3	750	1000	1250		.50	.64	.28	.43	.54		.35	.45	-	-	-	40.62	305 x 610 x 914
12 x 24 x 36	4	750	1000	1250		.43	.54	.22	.36	.46		.30	.38	-	-	-	54.16	305 x 610 x 914
12 x 24 x 36 24 x 24 x 12	5	750	1000 2000	1250		.34	.47	.16	.28	.40	.14	.24	.33	-	-	52	67.70	305 x 610 x 914
24 x 24 x 12 20 x 24 x 12	6 4	1500 1000	1250	2500 1500	-	-	-	-	-	-	-	-	-	.40	.46 .42	.52	29.25 19.50	610 x 610 x 305 508 x 610 x 305
20 x 24 x 12 20 x 24 x 12	5	1250	1500	1750	-		_		1	_	1	-	-	.38	.42	.48	24.37	508 x 610 x 305
20 x 24 x 12	6	1250	1500	2000	-	-	-	-	-	-	-	-	-	.34	.40	.46	29.25	508 x 610 x 305
20 x 20 x 12	4	1000	1250	1500	-	-	-	-	-	-	-	-	-	.39	.44	.51	16.50	508 x 508 x 305
20 x 20 x 12 20 x 20 x 12	5 6	1000 1250	1500 1500	1750 1750		1				-				.35 .36	.47 .43	.54 .49	20.62 24.75	508 x 508 x 305 508 x 508 x 305
20 x 20 x 12 20 x 20 x 21	5	1250	1500	2000	-	-	-	-	-	-	-	-	-	.27	.33	.49	34.63	508 x 508 x 505
20 x 20 x 21	6	1250	1500	2000	-	-	-	-	-	-	-	-	-	.23	.29	.34	41.25	508 x 508 x 533
20 x 20 x 21	7	1250	1500	2000	-	-	-	-	-	-	-	-	-	.19	.25	.31	48.63	508 x 508 x 533
12 x 24 x 12	3	750	1000	1250	-	-	-	-	-	-	-	-	-	.40	.46	.52	14.63	305 x 610 x 305

Actual size of face dimension is 5/8" less than nominal. Header thickness is 13/16"

Tolerances shall be +/- 1/8" for height, width and +/- 1" on depth.

All special sizes will be undersized 1/4" unless specified otherwise.

Depth of filter is measured from the front of the header to the end of the pocket.

Recommended final resistance is 1.50" in. w.g.

Performance values based on ASHRAE and in-house testing methods.

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

Glasfloss

THE CLEAR CHOICE SINCE 1936

PU	JRA	PA	K			0-959 ERV			0-859 ERV		6 M	60-65% 40-45% MERV 11 MERV 9						
SIZE W x H x D NOMINAL	PKT NO.		IR FLO APACI CFM	ГҮ	F I	INITIAL RESIST. IN. W.G.		F	INITIAL RESIST. IN. W.G.			INITIAL RESIST. IN. W.G.			NITIA RESIST N. W.C	г. 🛛	MEDIA SQUARE FEET	SIZE W x H x D NOMINAL MM
24 x 24 x 15 24 x 24 x 15	6 7	1000 1000	1250 1250	1500 1500	.47	.62 .57	.74 .70	.42 .39	.52 .48	.62 .59	.35 .33	.43 .40	.52 .49	.29 .27	.35 .33	.42 .40	35.75 41.71	610 x 610 x 381 610 x 610 x 381
24 x 24 x 15 24 x 24 x 15	8 10	1000 1000	1250 1250	1500 1500	.42 .38	.53 .45	.67 .60	.35 .32	.45 .38	.56 .50	.29 .26	.37 .31	.47 .42	.24	.30	.38	47.66 59.58	610 x 610 x 381 610 x 610 x 381
24 x 24 x 15 24 x 24 x 15	10	1000	1250	1500	.30	.37	.53	.32	.31	.45	.21	.26	.37	-	_		71.50	610 x 610 x 381
24 x 24 x 21 24 x 24 x 21	6	1000	1250	1500	.43	.56	.64	.36	.47	.54	.30	.39	.45	.25	.32	.37	48.75	610 x 610 x 533
24 x 24 x 21 24 x 24 x 21	8 10	1000 1000	1500 1500	2000 2000	.38 .34	.52 .45	.63 .58	.32 .29	.44 .38	.53 .49	.26 .24	.36 .31	.44 .40	.22 .19	.30 .26	.36 .33	65.00 81.25	610 x 610 x 533 610 x 610 x 533
24 x 24 x 25	6	1000	1500	2000	.32	.55	.68	.27	.46	.57	.22	.38	.47	-	-	-	57.41	610 x 610 x 635
24 x 24 x 25 24 x 24 x 25	8 10	1000 1500	1500 2000	2000 2500	.23 .29	.41 .50	.59 .66	.19 .24	.34 .42	.50 .55	.16 .20	.29 .35	.41 .46	-	-	-	76.55 95.69	610 x 610 x 635 610 x 610 x 635
24 x 24 x 23 24 x 24 x 29	6	1500	2000	2500	.29	.50	.00	.24	.42	.55	.20	.55	.40	-	-	-	66.08	610 x 610 x 633
24 x 24 x 29	8	1500	2000	2500	.39	.49	.62	.33	.41	.52	.27	.34	.43	.22	.30	-	88.11	610 x 610 x 737
24 x 24 x 29 24 x 24 x 36	10 6	1500 1500	2000 2000	2500 2500	.25	.41	.58	.21	.34	.49 .60	.17	.29	.40	-	-	-	110.13 81.25	610 x 610 x 737 610 x 610 x 914
24 x 24 x 30 24 x 24 x 36	8	1500	2000	2500	.38	.48	.72	.32	.40	.50	.20	.40	.30	-	-	1	108.83	610 x 610 x 914
24 x 24 x 36	10	1500	2000	2500	.22	.38	.53	.18	.32	.45	.15	.26	.37	-	-	-	135.41	610 x 610 x 914
20 x 24 x 15 20 x 24 x 15	6 8	850	1050	1250	.50	.62	.74	.42	.52	.62	.35	.43	.52	.29	.35	.42	35.75	508 x 610 x 381
20 x 24 x 15 20 x 24 x 15	8 10	850 850	1050 1050	1250 1250	.42 .38	.53 .45	.67 .60	.35 .32	.45 .38	.56 .50	.29 .26	.37 .31	.47 .42	.24 .22	.30 .26	.38 .34	47.66 59.58	508 x 610 x 381 508 x 610 x 381
20 x 24 x 21	6	850	1050	1250	.43	.56	.64	.36	.47	.54	.30	.39	.45	.25	.32	.37	48.75	508 x 610 x 533
20 x 24 x 21	8	850	1250	1650	.38 .34	.52	.63	.32	.44	.53	.26	.36	.44	.22 .19	.30	.36	65.00	508 x 610 x 533 508 x 610 x 533
20 x 24 x 21 20 x 24 x 25	10 6	850 850	1250 1250	1650 1650	.34	.45 .55	.58 .68	.29	.38 .46	.49 .57	.24	.31	.40		.26	.33	81.25 57.41	508 x 610 x 533
20 x 24 x 25	8	850	1250	1650	.23	.41	.59	.19	.34	.50	.16	.29	.41	-	-	-	76.55	508 x 610 x 533
20 x 24 x 25	10	1250	1650	2100	.29	.50	.66	.24	.42	.55	.20	.35	.46	-	-	-	95.69	508 x 610 x 533
20 x 24 x 29 20 x 24 x 29	6 8	1250 1250	1650 1650	2100 2100	.51 .39	.62 .49	.74 .62	.43 .33	.52 .41	.62 .52	.36 .27	.43 .34	.52 .43	-	-		66.08 88.11	508 x 610 x 737 508 x 610 x 737
20 x 24 x 29	10	1250	1650	2100	.25	.41	.58	.21	.34	.49	.17	.29	.40	-	-	-	110.13	508 x 610 x 737
20 x 24 x 36	6	1250	1650	2100	.38	.57	.72	.32	.48	.60	.26	.40	.50	-	-	-	81.25	508 x 610 x 914
20 x 24 x 36 20 x 24 x 36	8 10	1250 1250	1650 1650	2100 2100	.29 .22	.48 .38	.61 .53	.24 .18	.40 .32	.51 .45	.20 .15	.33 .26	.43 .37	1	-	1	108.83 135.41	508 x 610 x 914 508 x 610 x 914
12 x 24 x 15	3	500	625	750	.50	.62	.74	.42	.52	.62	.35	.43	.52	.29	.35	.42	17.87	305 x 610 x 381
12 x 24 x 15	4	500	625	750	.42	.53	.67	.35	.45	.56	.29	.37	.47	.24	.30	.38	23.83	305 x 610 x 381
12 x 24 x 15 12 x 24 x 15	5 6	500 500	625 625	750 750	.38 .30	.45 .37	.60 .53	.32 .25	.38 .31	.50 .45	.26 .21	.31 .26	.42 .37	.22	.26 .21	.34 .30	29.79 35.75	305 x 610 x 381 305 x 610 x 381
12 x 24 x 15	3	500	625	750	.43	.56	.64	.36	.47	.54	.30	.39	.45	.25	.32	.30	24.37	305 x 610 x 533
12 x 24 x 21	4	500	750	1000	.38	.52	.63	.32	.44	.53	.26	.36	.44	.22	.30	.36	32.50	305 x 610 x 533
12 x 24 x 21 12 x 24 x 25	5	500 500	750 750	1000 1000	.34	.45	.58 .68	.29 .27	.38	.49 .57	.24	.31	.40	.19	.26	.33	40.63 28.70	305 x 610 x 533 305 x 610 x 635
12 x 24 x 25 12 x 24 x 25	4	500	750	1000	.32	.33	.08	.19	.40	.57	.16	.38	.47	-	-	-	38.27	305 x 610 x 635 305 x 610 x 635
12 x 24 x 25	5	750	1000	1250	.29	.50	.66	.24	.42	.55	.20	.35	.46	-	-	-	47.84	305 x 610 x 635
12 x 24 x 29 12 x 24 x 29	3 4	750 750	1000 1000	1250 1250	.51 .39	.62 .49	.74 .62	.43 .33	.52 .41	.62 .52	.36 .27	.43 .34	.52 .43	-	-	-	33.04 44.05	305 x 610 x 737 305 x 610 x 737
12 x 24 x 29 12 x 24 x 29	5	750	1000	1250	.25	.49	.58	.33	.41	.32	.17	.34	.43	-	-		55.07	305 x 610 x 737 305 x 610 x 737
12 x 24 x 36	3	750	1000	1250	.38	.57	.72	.32	.48	.60		.40	.50	-	-	-	40.62	305 x 610 x 914
12 x 24 x 36 12 x 24 x 36	4	750 750	1000 1000	1250 1250	.29 .22	.48 .38	.61 .53	.24 .18	.40	.51 .45	.20 .15	.33 .26	.43 .37	-	-	-	54.16 67.70	305 x 610 x 914 305 x 610 x 914
24 x 24 x 12	6	1500	2000	2500	-		-	-	32	-	-	-	-	.44	.51	.57	29.25	610 x 610 x 305
20 x 24 x 12	4	1000	1250	1500	-	-	-	-	-	-	-	-	-	.41	.46	.54	19.50	508 x 610 x 305
20 x 24 x 12 20 x 24 x 12	5 6	1250 1250	1500 1500	1750 2000	-	-	-		-	-	-	-	-	.42 .37	.46 .44	.53 .51	24.37 29.25	508 x 610 x 305 508 x 610 x 305
20 x 24 x 12 20 x 20 x 12	4	1230	1250	1500	-	-	-	-	-	-	-	-	-	.43	.44	.56	16.50	508 x 508 x 305
20 x 20 x 12	5	1000	1500	1750	-	-	-	-	-	-	-	-	-	.39	.52	.59	20.62	508 x 508 x 305
20 x 20 x 12 20 x 20 x 21	6 5	1250 1250	1500 1500	1750 2000	-	-	-	-	-	-	-	-	-	.40	.47 .36	.54	24.75 34.63	508 x 508 x 305 508 x 508 x 533
20 x 20 x 21 20 x 20 x 21	6	1250	1500	2000	-	-	_	-	-	-	-	-	-	.30	.30	.43	41.25	508 x 508 x 533
20 x 20 x 21	7	1250	1500	2000	-	-	-	-	-	-	-	-	-	.21	.28	.34	48.63	508 x 508 x 533
12 x 24 x 12	3	750	1000	1250	-	-	-	-	-	-	-	-	-	.44	.51	.57	14.63	305 x 610 x 305

Actual size of face dimension is 5/8" less than nominal. Header thickness is 13/16"

Tolerances shall be +/- 1/8" for height, width and +/- 1" on depth.

All special sizes will be undersized 1/4" unless specified otherwise.

Depth of filter is measured from the front of the header to the end of the pocket.

Recommended final resistance is 1.50" in. w.g.

Performance values based on ASHRAE and in-house testing methods.


"Serving You With Locations Throughout The Nation"




INITIAL PRESSURE DROP

THE CLEAR CHOICE SINCE 1936

INITIAL PRESSURE DROP

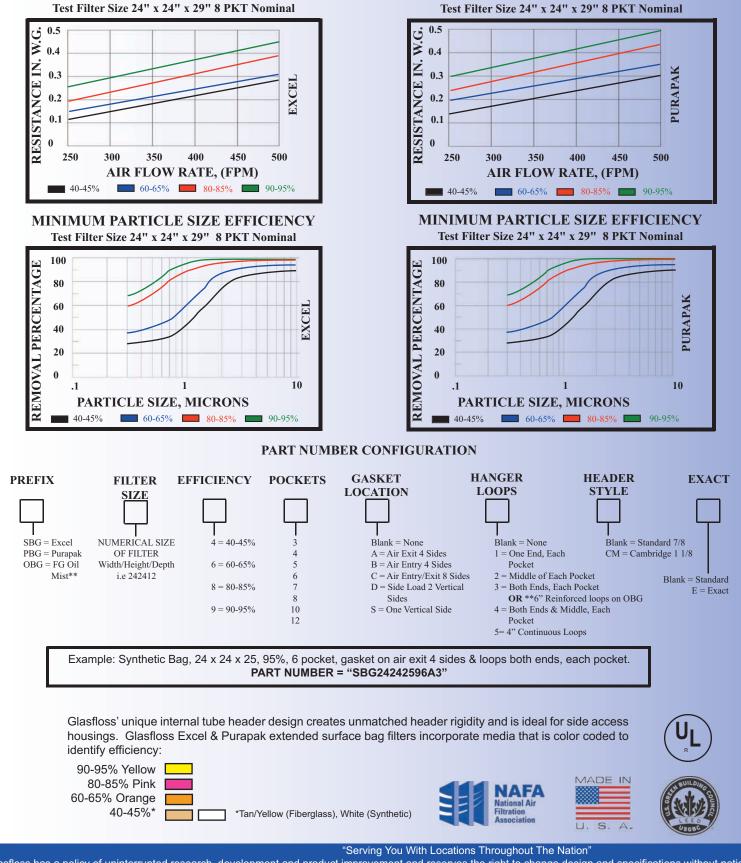






Z-PAK[®]SERIES High Efficiency Rigid Cell

- Synthetic or Fiberglass Media Available
- Injection Molded Pleat Separators
- Header or Box Styles
- High Dust Holding Capacity
- Ideal for VAV Systems



Glasfloss Z-Pak air filters are designed for medium and high efficiency applications and offer superior service life. The Z-Pak's total rigid construction makes it ideal for variable air volume systems (VAV), where changes in air flow can have an adverse affect on non-rigid type filters. Z-Pak filters are available with fiberglass or synthetic media in four efficiency performance levels: MERV 9 (40-45%),MERV 11 (60-65%), MERV 13 (80-85%) and MERV 14 / 15 (90-95%). The Z-Pak is available in a variety of filter face dimensions with two optional depths.

The Glasfloss Z-Pak Series frame shall be a rigid construction of 26 gauge galvanized steel. A heavy gauge, galvanized steel header is optional for the Z-Pak Series. The media shall be a high density synthetic fiber or a microfine glass fiber. The filter media pack shall be constructed by pleating a continuous sheet of media into uniform spaced pleats, which are separated by flame retardant, injection molded plastic media separators. A heavy-duty expanded metal reinforcement shall be laminated to the air exit side of the media by a thermo-setting adhesive to maintain continuity of the radial pleats. The expanded metal shall be galvanized to resist rust and corrosion. Metal vertical brackets shall be utilized to stabilize the media pack and prevent air bypass. The air entry and air exit side shall be fitted with two 26 gauge support struts. The pleated media ends are sealed to the top and bottom of the metal frame to prevent air bypass. Gasket material, 3/4" in width and 1/4" in thickness, is optional. Glasfloss Z-Pak series filters shall be rated to withstand temperatures up to 180 degrees Fahrenheit. Glasfloss Z-Pak filters shall be Classified under U.L. std. 900.

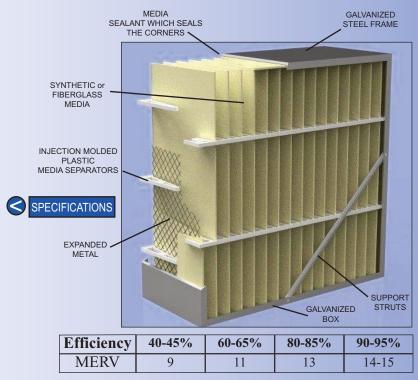

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com · (214) 741-7056 PRODUCT BULLETIN 92PAK · SECTION 9 · 11-1 - 15



40-45%

MERV 9

60-65%

MERV 11

80-85%

MERV 13

THE CLEAR CHOICE SINCE 1936

90-95%

MERV 14/15

80-85%

MERV 13

		Z-PAK	SYNTHET					
BASE MODEL NUMBER	SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	RES	FIAL SIST. W.G. HEADER	FINAL RESIST. IN. WG.	MEDIA SQUARE FEET	
	<u>[]</u>	MERV	/ 14 - 90-95%	Efficienc	ÿ	<u>[]</u>		
ZPS242412 ZPS122412 ZPS202012 ZPS202412 ZPS252012 ZPS24246 ZPS12246 ZPS12246	24 X 24 X 12 12 X 24 X 12 20 X 20 X 12 20 X 24 X 12 25 X 20 X 12 24 X 24 X 6 12 X 24 X 6 12 X 24 X 6 20 X 20 X 6	23-3/8 X 23-3/8 X 11-1/2 11-3/8 X 23-3/8 X 11-1/2 19-3/8 X 19-3/8 X 11-1/2 19-3/8 X 19-3/8 X 11-1/2 24-3/8 X 19-3/8 X 11-1/2 23-3/8 X 23-3/8 X 5-7/8 11-3/8 X 23-3/8 X 5-7/8 19-3/8 X 19-3/8 X 5-7/8	500 500 500 500 250 250 250 250	.55 .55 .55 .55 .55 .29 .29 .29	.65 .65 .65 .65 .65 .37 .37 .37	$ \begin{array}{r} 1.50\\ 1.50\\ 1.50\\ 1.50\\ 1.50\\ 1.50\\ 1.50\\ 1.50\\ 1.50\\ 1.50\\ \end{array} $	58.33 29.17 42.66 47.40 55.78 26.39 13.20 19.30	
ZPS20246	20 X 24 X 6	19-3/8 X 23-3/8 X 5-7/8	250	.29	.37 .37	1.50	21.45	
ZPS25206	25 X 20 X 6	24-3/8 X 19-3/8 X 5-7/8	250 7 13 - 80-85%			1.50	25.24	
ZPS242412	24 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2	500	.40	.54	1.50	58.33	
ZPS122412 ZPS202012 ZPS202412 ZPS252012 ZPS24246 ZPS12246 ZPS20206 ZPS20246 ZPS20246 ZPS25206	12 X 24 X 12 20 X 20 X 12 20 X 24 X 12 25 X 20 X 12 24 X 24 X 6 12 X 24 X 6 20 X 20 X 6 20 X 24 X 6 25 X 20 X 6	11-3/8 X 23-3/8 X 11-1/2 19-3/8 X 19-3/8 X 11-1/2 19-3/8 X 19-3/8 X 11-1/2 24-3/8 X 19-3/8 X 11-1/2 23-3/8 X 23-3/8 X 5-7/8 11-3/8 X 23-3/8 X 5-7/8 19-3/8 X 19-3/8 X 5-7/8 19-3/8 X 23-3/8 X 5-7/8 24-3/8 X 19-3/8 X 5-7/8	500 500 500 250 250 250 250 250 250 250	.40 .40 .40 .22 .22 .22 .22 .22 .22	.54 .54 .54 .54 .28 .28 .28 .28 .28 .28	1.50 1.50 1.50 1.50 1.50 1.50 1.50 1.50	29.17 42.66 47.40 55.78 26.39 13.20 19.30 21.45 25.24	
		MERV	7 11 - 60-65%	Efficienc	ÿ			
ZPS242412 ZPS122412 ZPS202012 ZPS202412 ZPS202412 ZPS252012 ZPS24246 ZPS12246 ZPS20206 ZPS20206 ZPS20206	24 X 24 X 12 12 X 24 X 12 20 X 20 X 12 20 X 20 X 12 25 X 20 X 12 24 X 24 X 6 12 X 24 X 6 20 X 20 X 6 20 X 24 X 6 25 X 20 X 6	23-3/8 X 23-3/8 X 11-1/2 11-3/8 X 23-3/8 X 11-1/2 19-3/8 X 19-3/8 X 11-1/2 19-3/8 X 23-3/8 X 11-1/2 24-3/8 X 19-3/8 X 11-1/2 23-3/8 X 23-3/8 X 11-1/2 23-3/8 X 23-3/8 X 5-7/8 11-3/8 X 23-3/8 X 5-7/8 19-3/8 X 23-3/8 X 5-7/8 24-3/8 X 19-3/8 X 5-7/8	500 500 500 500 250 250 250 250 250 250	.24 .24 .24 .24 .24 .14 .14 .14 .14	.34 .34 .34 .34 .22 .22 .22 .22 .22 .22	$ \begin{array}{r} 1.50\\ 1.50$	58.33 29.17 42.66 47.40 55.78 26.39 13.20 19.30 21.45 25.24	
	•	MERV	V 9 - 40-45%	Efficiency	y			1
ZPS242412 ZPS122412 ZPS202012 ZPS202412 ZPS252012 ZPS24246 ZPS12246 ZPS20206 ZPS20206 ZPS20246 ZPS25206 ZPS25206	24 X 24 X 12 12 X 24 X 12 20 X 20 X 12 20 X 24 X 12 25 X 20 X 12 24 X 24 X 6 12 X 24 X 6 20 X 20 X 6 20 X 24 X 6 25 X 20 X 6 25 X 20 X 6 be +/- 1/16" for w	23-3/8 X 23-3/8 X 11-1/2 11-3/8 X 23-3/8 X 11-1/2 19-3/8 X 19-3/8 X 11-1/2 19-3/8 X 23-3/8 X 11-1/2 24-3/8 X 19-3/8 X 11-1/2 23-3/8 X 19-3/8 X 11-1/2 23-3/8 X 23-3/8 X 5-7/8 11-3/8 X 23-3/8 X 5-7/8 19-3/8 X 19-3/8 X 5-7/8 19-3/8 X 19-3/8 X 5-7/8 24-3/8 X 19-3/8 X 5-7/8 idth and height. The frame defined	500 500 500 500 250 250 250 250 250 250	.20 .20 .20 .20 .11 .11 .11 .11 .11 .11 .11	.25 .25 .25 .25 .25 .16 .16 .16 .16 .16 .16 .16	1.50 1.50 1.50 1.50 1.50 1.50 1.50 1.50	58.33 29.17 42.66 47.40 55.78 26.39 13.20 19.30 21.45 25.24 1/4" unless speci-	
STANI	fied otherwise.	Header thickness shall be 13/ ESSURE DROP 24" x 12" Nominal		es based on AS	HRAE and in-hou	use testing methods		
5 1.0 0 0.8 0 0.6 0 0.4 0 0.2 0 250	300 350 AIR FLO	0 400 450 5 W RATE, (FPM)	BOX STYLE	AL PERCENTAGI	100 80 60 40 20 0 .1 PAI	1 RTICLE SIZI	E, MICRONS	10

"Serving You With Locations Throughout The Nation"

RE

40-45%

MERV 9

60-65%

MERV 11


90-95%


MERV 14/15



		Z-PAK I	FIBERGLA	ASS SER	RIES		
BASE	SIZE	SIZE	RATED	INIT	ΓIAL	FINAL	MEDIA
MODEL	WxHxD	W x H x D	VELOCITY	RES	SIST.	RESIST.	SQUARE
NUMBER	NOMINAL	EXACT	FPM	IN. Y	W.G.	IN. WG.	FEET
				BOX	HEADER		
,		MERV	7 15 - 90-95%	Efficienc	ÿ	<u> </u>	
ZPK242412	24 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2	500	0.59	0.70	1.50	58.33
ZPK122412	12 X 24 X 12	11-3/8 X 23-3/8 X 11-1/2	500	0.59	0.70	1.50	29.17
ZPK202012	20 X 20 X 12	19-3/8 X 19-3/8 X 11-1/2	500	0.59	0.70	1.50	42.66
ZPK202412 ZPK252012	20 X 24 X 12 25 X 20 X 12	19-3/8 X 23-3/8 X 11-1/2	500 500	0.59 0.59	0.70 0.70	1.50 1.50	47.40
ZPK232012 ZPK24246	23 X 20 X 12 24 X 24 X 6	24-3/8 X 19-3/8 X 11-1/2 23-3/8 X 23-3/8 X 5-7/8	250	0.39	0.41	1.50	55.78 26.39
ZPK12246	12 X 24 X 6	11-3/8 X 23-3/8 X 5-7/8	250	0.31	0.41	1.50	13.20
ZPK20206	20 X 20 X 6	19-3/8 X 19-3/8 X 5-7/8	250	0.31	0.41	1.50	19.30
ZPK20246	20 X 24 X 6	19-3/8 X 23-3/8 X 5-7/8	250	0.31	0.41	1.50	21.45
ZPK25206	25 X 20 X 6	24-3/8 X 19-3/8 X 5-7/8	250	0.31	0.41	1.50	25.24
		MERV	7 13 - 80-85%	Efficienc	ÿ		
ZPK242412	24 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2	500	0.48	0.58	1.50	58.33
ZPK122412	12 X 24 X 12	11-3/8 X 23-3/8 X 11-1/2	500	0.48	0.58	1.50	29.17
ZPK202012	20 X 20 X 12	19-3/8 X 19-3/8 X 11-1/2	500	0.48	0.58	1.50	42.66
ZPK202412	20 X 24 X 12	19-3/8 X 23-3/8 X 11-1/2	500	0.48	0.58	1.50	47.40
ZPK252012 ZPK24246	25 X 20 X 12 24 X 24 X 6	24-3/8 X 19-3/8 X 11-1/2 23-3/8 X 23-3/8 X 5-7/8	500 250	0.48	0.58 0.35	1.50 1.50	55.78 26.39
ZPK12246	12 X 24 X 6	23-3/8 X 23-3/8 X 5-7/8	250	0.26	0.35	1.50	13.20
ZPK20206	20 X 20 X 6	19-3/8 X 19-3/8 X 5-7/8	250	0.26	0.35	1.50	19.30
ZPK20246	20 X 24 X 6	19-3/8 X 23-3/8 X 5-7/8	250	0.26	0.35	1.50	21.45
ZPK25206	25 X 20 X 6	24-3/8 X 19-3/8 X 5-7/8	250	0.26	0.35	1.50	25.24
		MERV	/ 11 - 60-65%	Efficienc	ÿ		
ZPK242412	24 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2	500	.32	.48	1.50	58.33
ZPK122412	12 X 24 X 12	11-3/8 X 23-3/8 X 11-1/2	500	.32	.48	1.50	29.17
ZPK202012	20 X 20 X 12	19-3/8 X 19-3/8 X 11-1/2	500	.32	.48	1.50	42.66
ZPK202412	20 X 24 X 12	19-3/8 X 23-3/8 X 11-1/2	500	.32	.48	1.50	47.40
ZPK252012	25 X 20 X 12	24-3/8 X 19-3/8 X 11-1/2	500	.32	.48	1.50	55.78
ZPK24246	24 X 24 X 6	23-3/8 X 23-3/8 X 5-7/8	250	.21	.28	1.50	26.39
ZPK12246	12 X 24 X 6	11-3/8 X 23-3/8 X 5-7/8	250	.21	.28	1.50	13.20
ZPK20206 ZPK20246	20 X 20 X 6 20 X 24 X 6	19-3/8 X 19-3/8 X 5-7/8 19-3/8 X 23-3/8 X 5-7/8	250 250	.21 .21	.28 .28	1.50 1.50	19.30 21.45
ZPK25206	25 X 20 X 6	24-3/8 X 19-3/8 X 5-7/8	250	.21	.28	1.50	25.24
			V 9 - 40-45%	Efficiency	V		
ZPK242412	24 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2	500			1.50	58.33
ZPK242412 ZPK122412	24 X 24 X 12 12 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2 11-3/8 X 23-3/8 X 11-1/2	500	.22 .22	.27 .27	1.50	29.17
ZPK122412 ZPK202012	12 X 24 X 12 20 X 20 X 12	11-3/8 X 23-3/8 X 11-1/2 19-3/8 X 19-3/8 X 11-1/2	500	.22	.27	1.50	42.66
ZPK202012 ZPK202412	20 X 20 X 12 20 X 24 X 12	19-3/8 X 23-3/8 X 11-1/2	500	.22	.27	1.50	42.00
ZPK252012	25 X 20 X 12	24-3/8 X 19-3/8 X 11-1/2	500	.22	.27	1.50	55.78
ZPK24246	24 X 24 X 6	23-3/8 X 23-3/8 X 5-7/8	250	.13	.18	1.50	26.39
ZPK12246	12 X 24 X 6	11-3/8 X 23-3/8 X 5-7/8	250	.13	.18	1.50	13.20
ZPK20206	20 X 20 X 6	19-3/8 X 19-3/8 X 5-7/8	250	.13	.18	1.50	19.30
ZPK20246	20 X 24 X 6	19-3/8 X 23-3/8 X 5-7/8	250	.13	.18	1.50	21.45
ZPK25206	25 X 20 X 6	24-3/8 X 19-3/8 X 5-7/8	250	.13	.18	1.50	25.24
Tolerances shall	be +/- 1/16" for wi	dth and height. The frame de	pth shall not exceed 5	-7/8" and 11-1/2	". All special size	s will be undersized	1/4" unless specified
otherwise. Head	ler thickness shall	be 13/16". Performance value	es based on ASHRAE	and in-house tes	sting methods.		
STA	NDARD P	RESSURE DROP		MINIMU	M PARTIC	CLE SIZE E	FFICIENCY
		x 24" x 12" Nominal				" x 24" x 12"	








"Serving You With Locations Throughout The Nation"



PART NUMBER CONFIGURATION

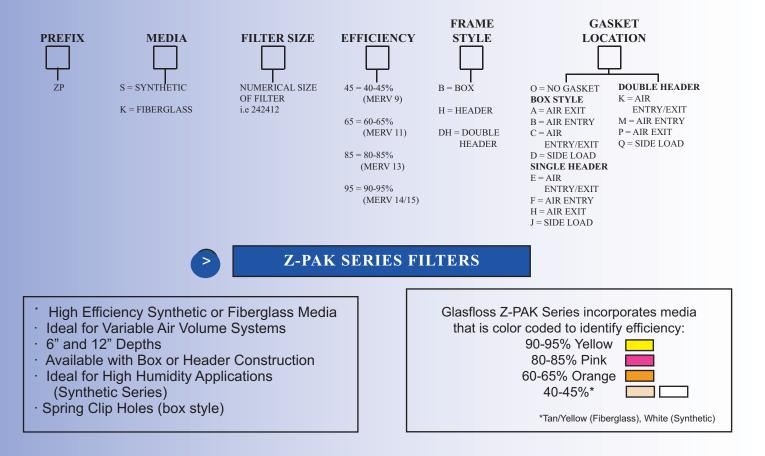




"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.








- Heavy-Duty Construction for Gas Turbine Applications
- Synthetic Media for Extra Durability and Moisture Resistance
- Injection Molded Pleat Separators
- Extra Durability for Demanding HVAC Applications
- MERV 11, 13 and 14



Glasfloss Z-Pak GT filters are designed to withstand the rigors of a gas turbine engine, centrifugal compressor and other high velocity applications. Heavy-duty face grills and additional media pack reinforcements ensure the integrity of the filters under the most demanding conditions. Z-Pak GT filters are available in 12" and 6" depths in most standard size dimensions in box style construction.

The Glasfloss Z-Pak GT Series frame shall be a rigid construction of 26 gauge galvanized steel. The media shall be a high density, 100% synthetic fiber. The filter media pack shall be constructed by pleating a continuous sheet of media into uniform spaced pleats that are separated by flame retardant, injection molded plastic media separators. There shall be four separate rows of media separators on the air entering sides and five separate rows on the air exit side. A heavy-duty expanded metal reinforcement shall be laminated to the air exit side of the media by a thermo-setting adhesive to maintain continuity of the radial pleats. The expanded metal shall be galvanized to resist rust and corrosion. Metal vertical brackets shall be utilized to stabilize the media pack and prevent air bypass. An expanded metal reinforcement face guard is on the air entering and air leaving sides of the frame to insure filter integrity and increase rigidity. The pleated media ends are adhered to the top and bottom of the metal frame with an adhesive sealant to prevent air bypass. Gasket material, 3/4" in width and 1/4" in thickness, is optional. The filter shall be rated to withstand temperatures up to 180 degrees Fahrenheit. The filters shall be Classified under U. L. Std. 900 and withstand up to 8 in. w.g. in an "Air Filter Breaching Test."

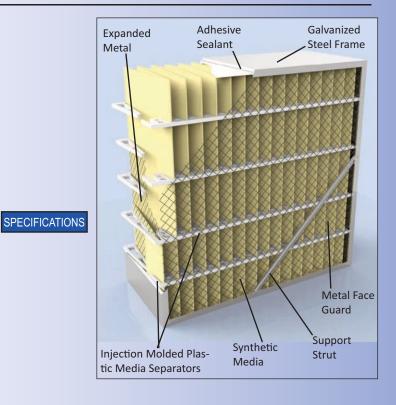

"Serving You With Locations Throughout The Nation"


Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com · (214) 741-7056 PRODUCT BULLETIN 92PAK · SECTION 9 · 11-1-16




MODEL NUMBER	SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOC- ITY FPM	INITIAL RESIST. IN. W.G.	FINAL RESIST. IN. W.G.	MEDIA SQUARE FEET	WEIGHT (lbs.)
			MERV	14			
ZPS24241295BOGT ZPS12241295BOGT ZPS2424695BOGT ZPS1224695BOGT	24 X 24 X 12 12 X 24 X 12 24 X 24 X 6 12 X 24 X 6	23-3/8 X 23-3/8 X 11-1/2 11-3/8 X 23-3/8 X 11-1/2 23-3/8 X 23-3/8 X 5-7/8 11-3/8 X 23-3/8 X 5-7/8	500 500 250 250	.55 .55 .29 .29	1.50 1.50 1.50 1.50	58.33 29.17 26.39 13.20	20 14 11 8
			MERV	13			
ZPS24241285BOGT ZPS12241285BOGT ZPS2424685BOGT ZPS1224685BOGT	24 X 24 X 12 12 X 24 X 12 24 X 24 X 6 12 X 24 X 6	23-3/8 X 23-3/8 X 11-1/2 11-3/8 X 23-3/8 X 11-1/2 23-3/8 X 23-3/8 X 5-7/8 11-3/8 X 23-3/8 X 5-7/8	500 500 250 250	.41 .41 .23 .23	1.50 1.50 1.50 1.50	58.33 29.17 26.39 13.20	20 14 11 8
			MERV	11			
ZPS24241265BOGT ZPS12241265BOGT ZPS2424665BOGT ZPS1224665BOGT	24 X 24 X 12 12 X 24 X 12 24 X 24 X 6 12 X 24 X 6	23-3/8 X 23-3/8 X 11-1/2 11-3/8 X 23-3/8 X 11-1/2 23-3/8 X 23-3/8 X 5-7/8 11-3/8 X 23-3/8 X 5-7/8	500 500 250 250	.24 .24 .14 .14	1.50 1.50 1.50 1.50	58.33 29.17 26.39 13.20	20 14 11 8

Z-PAK GT

* Model Number represents a non-gasketed filter.



MINIMUM PARTICLE SIZE EFFICIENCY Test Filter Size 24" x 24" x 12" Nominal




Distributed by:



"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.




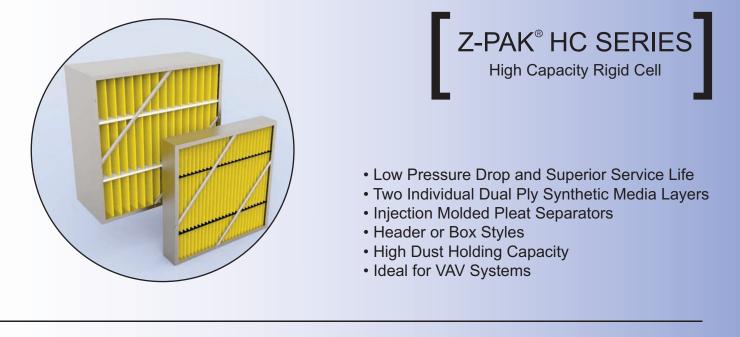



The Glasfloss Z-Pak HC Series frame shall be a rigid construction of 26 gauge galvanized steel. A heavy gauge galvanized steel header is optional for the Z-Pak HC Series. The two distinct filtration media layers shall be a high density synthetic fiber blend. The filter media pack shall be constructed by pleating continuous sheets of media into uniform spaced pleats, which are separated and secured by flame retardant, injection molded plastic media separators. Heavy duty expanded metal shall be bonded and secured between the two layers of media. The heavy duty expanded metal shall be galvanized to resist rust and corrosion. The air entry and air exit side shall be fitted with two 26 gauge support struts. The pleated media ends are sealed and secured to the top and bottom of the metal frame to prevent air bypass. Gasket material, 3/4" in width and 1/4" in thickness, is optional. Glasfloss Z-Pak HC series filters shall be rated to withstand temperatures up to 180 degrees Fahrenheit. Glasfloss Z-Pak HC filters shall be Classified under U.L. std. 900.

Glasfloss Z-Pak HC rigid cell filters are designed for high efficiency applications and incorporate two individual filtration media layers that provide very low pressure drop and superior service life. The Z-Pak HC's total rigid construction makes it ideal for variable air volume systems (VAV), where changes in air flow can have an adverse effect on non-rigid type filters. Z-Pak HC filters are designed to handle high airflow and are available in MERV 14 performance.

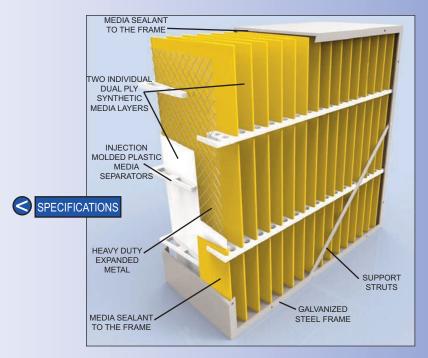

"Serving You With Locations Throughout The Nation"


Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. glasfloss.com · (214) 741-7056 PRODUCT BULLETIN 92PAKHC · SECTION 9 · 5-1-18



BASE MODEL NUMBER	SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	RES IN.	FIAL SIST. W.G. HEADER	FINAL RESIST. IN. WG.	SQU	DIA JARE TAGE HEADER
			MERV	14				
ZPS242412	24 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2	500	.28 .35		1.50	58.33	52.50
ZPS122412	12 X 24 X 12	11-3/8 X 23-3/8 X 11-1/2	500	.28 .35		1.50	29.17	26.25
ZPS202412	20 X 24 X 12	19-3/8 X 23-3/8 X 11-1/2	500	.28 .35		1.50	47.40	42.66
ZPS24246	24 X 24 X 6	23-3/8 X 23-3/8 X 5-7/8	250	.24	.29	1.50	26.39	23.75
ZPS12246	12 X 24 X 6	11-3/8 X 23-3/8 X 5-7/8	250	.24	.29	1.50	13.20	11.88
ZPS20246	20 X 24 X 6	19-3/8 X 23-3/8 X 5-7/8	250	.24	.29	1.50	21.45	19.30
ZPS24244	24 X 24 X 4	23-3/8 X 23-3/8 X 3-3/4	250	.23	.28	1.50	38.91	35.10
ZPS12244	12 X 24 X 4	11-3/8 X 23-3/8 X 3-3/4	250	.23	.28	1.50	18.95	17.15
ZPS20244	20 X 24 X 4	19-3/8 X 23-3/8 X 3-3/4	250	.23	.28	1.50	32.29	29.06

Z-PAK HC SYNTHETIC SERIES

Tolerances shall be +/- 1/16" for width and height. The frame depth shall not exceed 11-1/2", 5-7/8" and 3-3/4". Header thickness shall be 13/16". Performance values based on ASHRAE and in-house testing methods.

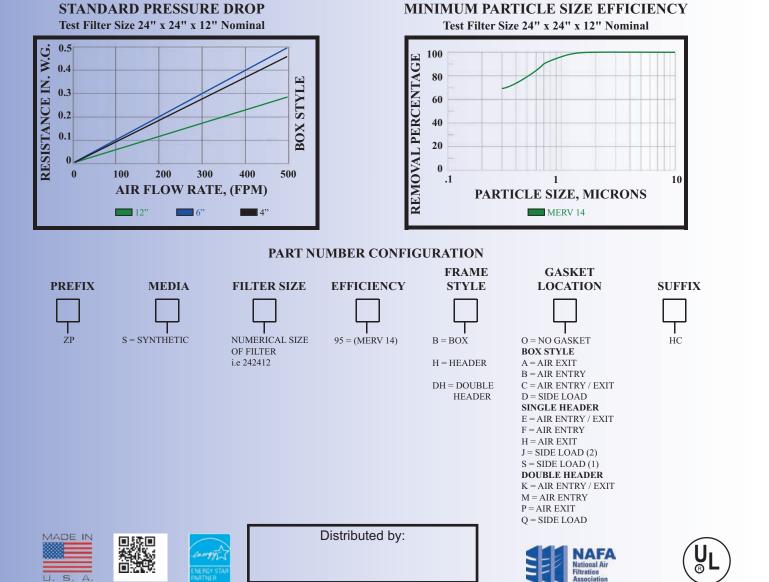

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

glasfloss.com (214) 741-7056

Gasfloss

THE CLEAR CHOICE SINCE 1936



The frame shall be made of a rigid high-density 3/4" particleboard or 26-gauge galvanized metal. The metal frame shall have two support struts on the air-entry and air-exit sides. A 26-gauge galvanized steel header is available on the metal frame. The media shall be constructed of a waterresistant inorganic glass microfiber. For quality assurance, the glass microfiber media rolls are randomly tested and certified to meet minimum efficiency requirements by the media manufacturer. The media pack shall consist of a continuous sheet of the pleated glass microfiber. The pleated media pack is separated with multiple rolled-edge corrugated aluminum separators. The media pack shall be pressure-fitted with a synthetic media gasket on metal frame filters. A 1/4" thick gasket shall be applied on the filter as an option. The filter shall be rated to withstand temperatures up to 180 degrees Fahrenheit. The particleboard filters and metal frame filters shall be Classified under U. L. Std. 900. The Magna Series shall have the following performance.

Series	600	800	900
Avg. Efficiency	60-65%	80-85%	90-95%
MERV	11	13	14

SPECIFICATIONS

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com • (214) 741-7056 PRODUCT BULLETIN 10A-1 • SECTION 10 • 5-30-18



600 Series: MERV 11 & 800 Series: MERV 13


MO	ASE DEL IBER	SIZE H x W x D NOMINAL	SIZE H x W x D EXACT	RATED VELOCITY FPM	RES	TIAL SIST. W.G.	MEDIA SQUARE FEET	SIZE H x W x D NOMINAL	RATED VELOCITY M/H		TIAL SIST. CALS
MERV 11	MERV 13				MERV 11	MERV 13		MM		MERV 11	MERV 13
2016A1	2016A2	20 x 16 x 6	19-3/8 x 15-3/8 x 5-7/8	250	.20	.30	30.46	508 x 406 x 152	4575	49.7	74.6
2020A1	2020A2	20 x 20 x 6	19-3/8 x 19-3/8 x 5-7/8	250	.20	.30	38.67	508 x 508 x 152	4575	49.7	74.6
2412A1	2412A2	24 x 12 x 6	23-3/8 x 11-3/8 x 5-7/8	250	.20	.30	27.46	610 x 305 x 152	4575	49.7	74.6
2418A1	2418A2	24 x 18 x 6	23-3/8 x 17-3/8 x 5-7/8	250	.20	.30	41.85	610 x 457 x 152	4575	49.7	74.6
2420A1	2420A2	24 x 20 x 6	23-3/8 x 19-3/8 x 5-7/8	250	.20	30	46.49	610 x 508 x 152	4575	49.7	74.6
2424A1	2424A2	24 x 24 x 6	23-3/8 x 23-3/8 x 5-7/8	250	.20	.30	55.46	610 x 610 x 152	4575	49.7	74.6
1625A1	1625A2	16 x 25 x 6	15-3/8 x 24-3/8 x 5-7/8	250	.20	.30	38.79	406 x 635 x 152	4575	49.7	74.6
2025A1	2025A2	20 x 25 x 6	19-3/8 x 24-3/8 x 5-7/8	250	.20	.30	48.19	508 x 635 x 152	4575	49.7	74.6
2016B1	2016B2	20 x 16 x 12	19-3/8 x 15-3/8 x 11-1/2	500	.50	.55	61.38	508 x 406 x 305	9150	124.4	136.8
2020B1	2020B2	20 x 20 x 12	19-3/8 x 19-3/8 x 11-1/2	500	.50	.55	76.24	508 x 508 x 305	9150	124.4	136.8
2412B1	2412B2	24 x 12 x 12	23-3/8 x 11-3/8 x 11-1/2	500	.50	.55	55.82	610 x 305 x 305	9150	124.4	136.8
2418B1	2418B2	24 x 18 x 12	23-3/8 x 17-3/8 x 11-1/2	500	.50	.55	82.4	610 x 457 x 305	9150	124.4	136.8
2420B1	2420B2	24 x 20 x 12	23-3/8 x 19-3/8 x 11-1/2	500	.50	.55	91.22	610 x 508 x 305	9150	124.4	136.8
2424B1	2424B2	24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2	500	.50	.55	110.91	610 x 610 x 305	9150	124.4	136.8
1625B1	1625B2	16 x 25 x 12	15-3/8 x 24-3/8 x 11-1/2	500	.50	.55	76.95	406 x 635 x 305	9150	124.4	136.8
2025B1	2025B2	20 x 25 x 12	19-3/8 x 24-3/8 x 11-1/2	500	.50	.55	95.16	508 x 635 x 305	9150	124.4	136.8

900 Series: MERV 14

BASE MODEL NUMBER	SIZE H x W x D NOMINAL		RATED VELOCITY FPM	RES IN.	TAL SIST. W.G.	SQU FE	DIA ARE ET	SIZE H x W x D NOMINAL	RATED VELOCITY M/H	RES PASC	TIAL SIST. CALS
				MERV 14	HC	MERV 14	НС	MM		MERV 14	HC
2016A3	20 x 16 x 6	19-3/8 x 15-3/8 x 5-7/8	250	.35	-	30.46	-	508 x 406 x 152	4575	87.1	-
2020A3	20 x 20 x 6	19-3/8 x 19-3/8 x 5-7/8	250	.35	-	38.67	-	508 x 508 x 152	4575	87.1	-
2412A3	24 x 12 x 6	23-3/8 x 11-3/8 x 5-7/8	250	.35	-	27.46	-	610 x 305 x 152	4575	87.1	-
2418A3	24 x 18 x 6	23-3/8 x 17-3/8 x 5-7/8	250	.35	-	41.85	-	610 x 457 x 152	4575	87.1	-
2420A3	24 x 20 x 6	23-3/8 x 19-3/8 x 5-7/8	250	.35	-	46.49	-	610 x 508 x 152	4575	87.1	-
2424A3	24 x 24 x 6	23-3/8 x 23-3/8 x 5-7/8	250	.35	-	55.46	-	610 x 610 x 152	4575	87.1	-
1625A3	16 x 25 x 6	15-3/8 x 24-3/8 x 5-7/8	250	.35	-	38.79	-	406 x 635 x 152	4575	87.1	-
2025A3	20 x 25 x 6	19-3/8 x 24-3/8 x 5-7/8	250	.35	-	48.19		508 x 635 x 152	4575	87.1	-
2016B3	20 x 16 x 12	19-3/8 x 15-3/8 x 11-1/2	500	.60	.55	61.38	73.66	508 x 406 x 305	9150	149.3	136.8
2020B3	20 x 20 x 12	19-3/8 x 19-3/8 x 11-1/2	500	.60	.55	76.24	91.49	508 x 508 x 305	9150	149.3	136.8
2412B3	24 x 12 x 12	23-3/8 x 11-3/8 x 11-1/2	500	.60	.55	55.82	66.98	610 x 305 x 305	9150	149.3	136.8
2418B3	24 x 18 x 12	23-3/8 x 17-3/8 x 11-1/2	500	.60	.55	82.4	98.88	610 x 457 x 305	9150	149.3	136.8
2420B3	24 x 20 x 12	23-3/8 x 19-3/8 x 11-1/2	500	.60	.55	91.22	109.46	610 x 508 x 305	9150	149.3	136.8
2424B3	24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2	500	.60	.55	110.91	133.09	610 x 610 x 305	9150	149.3	136.8
1625B3	16 x 25 x 12	15-3/8 x 24-3/8 x 11-1/2	500	.60	.55	76.95	92.34	406 x 635 x 305	9150	149.3	136.8
2025B3	20 x 25 x 12	19-3/8 x 24-3/8 x 11-1/2	500	.60	.55	95.16	114.19	508 x 635 x 305	9150	149.3	136.8


Tolerances shall be +/- 1/16" for height and width. The frame depth shall not exceed 5-7/8" and 11-1/2". High Capacity MERV 14 Magna filters contains 20% more media.

STANDARD PRESSURE DROP



Performance values based on ASHRAE and in-house testing methods. Recommended final resistance is 1.50" in. w.g.


MINIMUM PARTICLE SIZE EFFICIENCY Test Filter Size 24" x 24" x 12" Nominal



'Serving You With Locations Throughout The Nation"



PART NUMBER CONFIGURATION

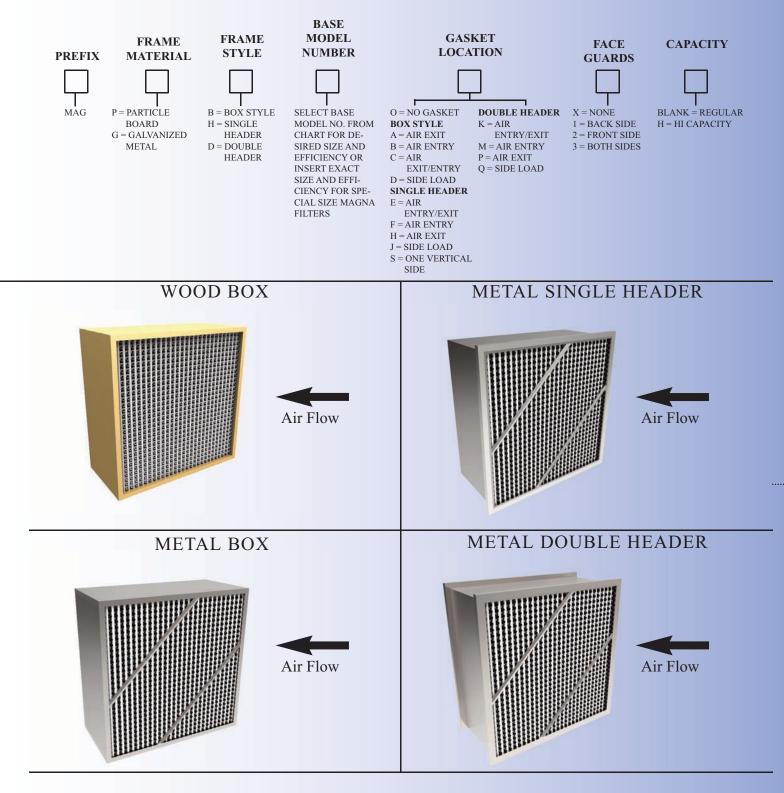

"Serving You With Locations Throughout The Nation"



Features:

- [•] Media produced from glass microfibers are moisture resistant and will not support microbial growth.
- Frame is available in either 3/4" particleboard or 26-gauge galvanized metal.
- Aluminum separators incorporate rolled edges that help prevent media chaffing and damage in handling.
- The filter cartridge is secured within the frame using a pressure-fit synthetic media gasket on metal frames and a two-part polyurethane sealant on particleboard frames to prevent air-bypass.
- Magna 600, 800 and 900 series are available in standard and special size face dimensions.


Optional Features:

- An expanded metal wire lathe face guard can be placed on air-entry and/or air-exit side of the filter.
- High-temperature, high-capacity and turbine-style filters are available.
- A 1/4" thick gasket may be applied on the filter.



Series	600	800	900
Avg. Efficiency	60-65%	80-85%	90-95%
MERV	11	13	14

The filter element shall be factory-constructed by pleating a continuous sheet of glass microfiber media into uniform spaced pleats which are separated by rolled-edge corrugated aluminum. The filter pack shall be encased in a rigid frame of 3/4" particleboard or 26-gauge galvanized metal. The media pack shall be pressure-fitted with a synthetic media gasket on metal frame filters. The 26-gauge steel frames shall have two support struts on the air-entry and air-exit sides. The frame shall not exceed 5-7/8" or 11-1/2" in depth and standard tolerances shall be +/-1/16" on height and width. Each filter shall be packaged into a heavy-duty carton. All filters shall be Classified under U. L. Std. 900.

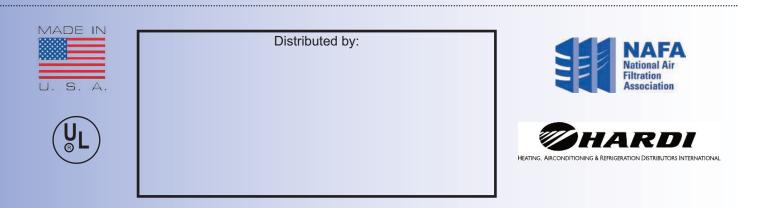





"Serving You With Locations Throughout The Nation"

Gasfloss

THE CLEAR CHOICE SINCE 1936

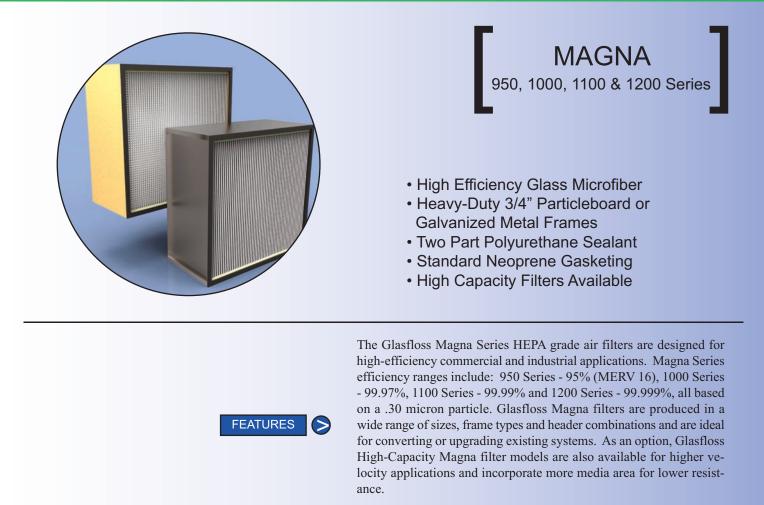

The frame shall be made of a rigid high-density 3/4" particleboard or 18-gauge galvanized metal (26-gauge galvanized metal frame is used for the Magna 950 Series - 95% MERV 16). A 26-gauge galvanized steel header is available on the metal frame on 950 Series. The media shall be constructed of a water-resistant, inorganic glass microfiber. For quality assurance, the glass microfiber media rolls are randomly tested and certified to meet minimum efficiency requirements by the media manufacturer. The media pack shall consist of a continuous sheet of the pleated glass microfiber. The pleated media pack is separated with multiple rolled-edge corrugated aluminum separators. The media cartridge shall be sealed with a fire-retarding, rubber base, two-part sealant that bonds the media and separators to the interior of the frame. A 1/4" thick closed cell neoprene gasket shall be applied on the filter. The filter shall be rated to withstand temperatures at a continuous 180° Fahrenheit. The 95% (MERV 16), 99.97%, 99.99% and 99.999% Magna filters shall be Classified under U. L. Std. 900.

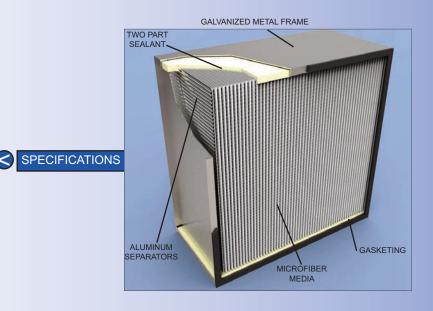

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com • (214) 741-7056 PRODUCT BULLETIN 10B-2 • SECTION 10 • 8-20-2021



BASE MODEL NUMBER	SIZE H x W x D EXACT	VE	RATEI LOCI FPM	TY	F I	NITIA RESIST N. W.C	Г. Э.	8	MEDIA QUAR FEET	E	F I	NITIA RESIST N. W.C	Г. Э.	s	MEDIA QUAR FEET	E
		Std	HC	SHC	Std	HC	SHC	Std	HC	SHC	Std	HC	SHC	Std	HC	SHC
950	Series - 95% (MH	E RV 1	16)				Bo	x Style								
0808A4	8 x 8 x 5-7/8	175	-	-	0.50	-	-	13.06	-	-	-	-	-	-		-
1212A4	12 x 12 x 5-7/8	175	-	-	0.50	-	-	29.75	-	-	-	-	-	-	-	-
2412A4	24 x 12 x 5-7/8	175	-	-	0.50	-	-	58.75	-	-	-	-	-	-	-	-
2418A4	24 x 18 x 5-7/8	175	-	-	0.50	-	-	88.13	-	-	-	-		-	-	-
2424A4	24 x 24 x 5-7/8	175	-	-	0.50	-	-	117.50	-	-	-	-	-	-	-	-
2430A4	24 x 30 x 5-7/8	175	-	-	0.50	-	-	146.88	-	-	-	-	-	-	-	-
2436A4	24 x 36 x 5-7/8	175	-	-	0.50	-	-	176.00	-	-	-	-	-	-	-	-
2448A4	24 x 48 x 5-7/8	175	-	-	0.50	-	-	235.00	-	-	-	-	-	-	-	-
1212B4	12 x 12 x 11-1/2	275	500	-	0.50	0.60	-	57.50	69.00	-	-	-	-	-	-	-
23F11FB4	23-3/8 x 11-3/8 x 11-1/2	275	500	-	0.50	0.60	-	106.17	127.40	-	-	-	-	-	-	-
2412B4	24 x 12 x 11-1/2	275	500	-	0.50	0.60	-	115.00	138.00	-	-	-	-	-	-	-
2418B4	24 x 18 x 11-1/2	275	500	-	0.50	0.60	-	172.50	207.00	-	-	-	-	-	-	-
23F23FB4	23-3/8 x 23-3/8 x 11-1/2	275	500	-	0.50	0.60	-	218.18	261.82	-	-	-	-	-	-	-
2424B4	24 x 24 x 11-1/2	275	500	-	0.50	0.60	-	230.00	276.00	-	-	-	-	-	-	-
2430B4	24 x 30 x 11-1/2	275	500	-	0.50	0.60	-	287.50	345.00	-	-	-	-	-	-	-
1000 Series	s - 99.97%, 1100 S	eries	- 99.	99%			Bo	x Style	;			F	lush 🛛	Box St	yle	
0808A5	8 x 8 x 5-7/8	175	-	-	0.79	-	-	7.87	-	-	0.75	-	-	9.72	_	-
1212A5	12 x 12 x 5-7/8	175	-	-	0.79	-	-	20.93	-	-	0.75	-	-	23.92	-	-
1818A5	18 x 18 x 5-7/8	175	-	-	0.79	-	-	51.68	-	-	0.75	-	-	56.38	-	-
2412A5	24 x 12 x 5-7/8	175	-	-	0.79	-	-	70.47	-	-	0.75	-	-	75.17	-	-
2418A5	24 x 18 x 5-7/8	175	-	-	0.79	-	-	44.84	-	-	0.75	-	-	47.83	-	-
2424A5	24 x 24 x 5-7/8	175	-	-	0.79	-	-	96.09	-	-	0.75	-	-	102.50	-	-
2430A5	24 x 30 x 5-7/8	175	-	-	0.79	-	-	123.32	-	-	0.75	-	-	129.73	-	-
2436A5	24 x 36 x 5-7/8	175	-	-	0.79	-	-	148.95	-	-	0.75	-	-	155.35	-	-
2448A5	24 x 48 x 5-7/8	175	-	-	0.79	-	-	200.20	-	-	0.75	-	-	206.60	-	-
2460A5	24 x 60 x 5-7/8	175	-	-	0.79	-	-	253.05	-	-	0.75	-	-	397.83	-	-
*2472A5	24 x 72 x 5-7/8	175	-	-	0.79	-	-	304.30	-	-	0.75	-	_	476.41	-	-
1212B5	12 x 12 x 11-1/2	275	500	500	0.79	1.3	1.2	49.00	57.75	64.75	0.75	1.25	1.15	56.00	66.50	73.50
23F11FB5	23-3/8 x 11-3/8 x 11-1/2	275	500	500	0.79	1.3	1.2	97.87	116.12	129.39	0.75	1.25	1.15	104.51	122.76	137.68
2412B5	24 x 12 x 11-1/2	275	500	500	0.79	1.3	1.2	105.00	126.00	141.75	0.75	1.25	1.15	112.00	133.00	148.75
2418B5	24 x 18 x 11-1/2	275	500	500	0.79	1.3	1.2	157.50	189.00	212.63	0.75	1.25	1.15	168.00	199.50	223.13
23F23FB5	23-3/8 x 23-3/8 x 11-1/2	275	500	500	0.79	1.3	1.2	201.12	238.62	265.89	0.75	1.25	1.15	214.76	252.26	282.93
2424B5	24 x 24 x 11-1/2	275	500	500	0.79	1.3	1.2	210.00	252.00	283.50	0.75	1.25	1.15	224.00	266.00	297.50
2430B5	24 x 30 x 11-1/2	275	500	500	0.79	1.3	1.2	269.50	318.50	357.00	0.75	1.25	1.15	283.50	336.00	371.00


For 1100 Series - 99.99% replace 5 with 6 in the base part number.

	1200 Series - 99.9	99%					Bo	x Style				F	lush	Box St	yle	
1212B7	12 x 12 x 11-1/2	275	500	-	0.90	1.54	-	49.00	57.75	-	0.85	1.49	-	56.00	66.50	-
23F11FB7	23-3/8 x 11-3/8 x 11-1/2	275	500	-	0.90	1.54	-	97.87	116.12	-	0.85	1.49	-	104.51	122.76	-
2412B7						1.54	-	105.00	126.00	-	0.85	1.49	-	112.00	133.00	-
2418B7	24 x 18 x 11-1/2	275	500	-	0.90	1.54	-	157.50	189.00	-	0.85	1.49	-	168.00	199.50	-
23F23FB7	23-3/8 x 23-3/8 x 11-1/2	275	500	-	0.90	1.54	-	201.12	238.62	-	0.85	1.49	-	214.76	252.26	-
2424B7	24 x 24 x 11-1/2	275	500	-	0.90	1.54	-	210.00	252.00	-	0.85	1.49	-	224.00	266.00	-
2430B7	2430B7 24 x 30 x 11-1/2 275 500 -				0.90	1.54	-	269.50	318.50	-	0.85	1.49	-	283.50	336.00	-

*Available in particle board only. Tolerances shall be +/- 1/16" for height and width. The frame depth shall not exceed 5-7/8" and 11-1/2". Hi Capacity contains approx. 20% more media, Super High Capacity contains approx. 35% more media.




PART NUMBER CONFIGURATION

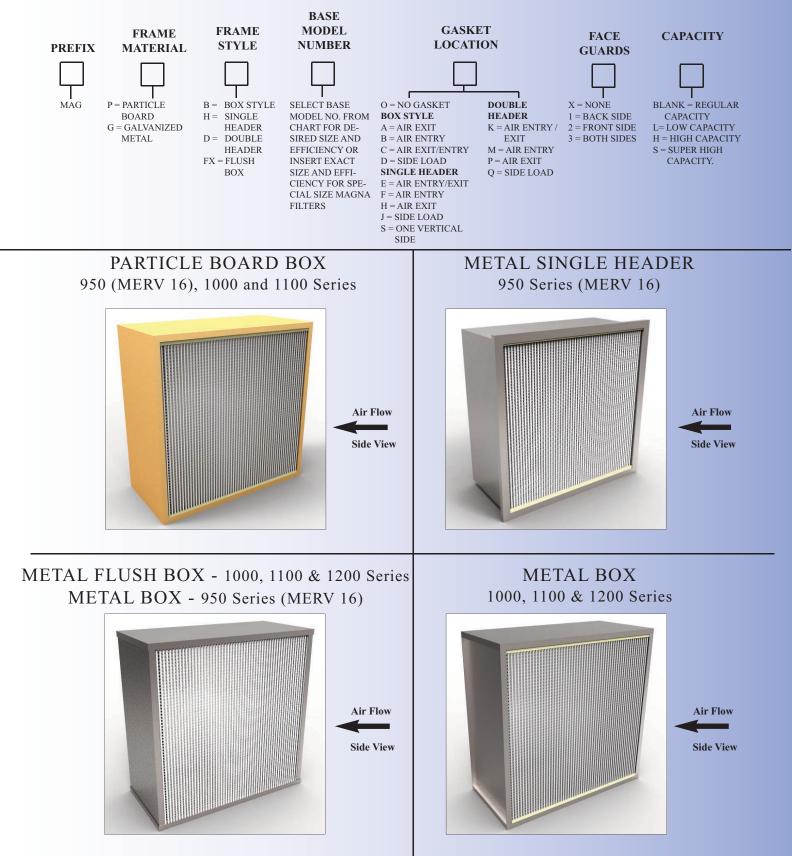

"Serving You With Locations Throughout The Nation"



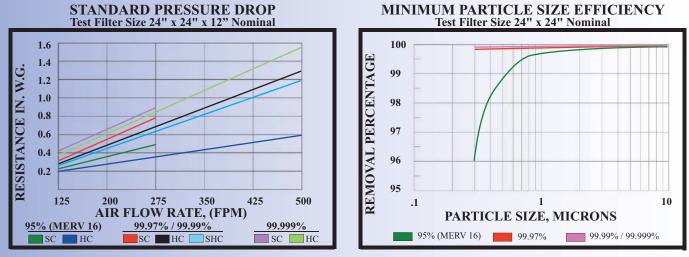

Features:

- Quality Assurance the Magna 950 Series 95% (MERV 16), 1000 Series 99.97%, 1100 Series 99.99% and 1200 Series 99.999% filters incorporate glass microfiber media rolls that are randomly tested and certified to meet minimum efficiency requirements by the media manufacturer. In addition, Glasfloss randomly selects and tests filters for leaks under a rigorous quality control program.
- Media produced from glass microfibers is moisture-resistant and will not support microbial growth.
- Magna 99.99% and 99.999% filters are tested for leaks based on near-monodispersed .30 micron size particles.
- Frame is available in either 3/4" particleboard or 18 gauge galvanized metal for the 1000 Series 99.97%, and 1100 Series 99.99%. The 1200 Series - 99.999% is available in metal frame only. A 26-gauge galvanized metal frame is used for the Magna 950 Series - 95% (MERV 16).
- Aluminum separators incorporate rolled edges that help prevent media chaffing and damage in handling.
- The filter cartridge is bonded within the frame using a two-part sealant that isolates the filter from external shock and prevents air bypass.
- Neoprene closed-cell gasket is standard on each filter.

Optional Features:

- Upon request, the Magna 950 Series 95% (MERV 16), 1000 Series 99.97% shall be individually tested for leaks based on near-monodispersed .30 micron size particles; additional charges apply.
- An expanded metal wire lath face guard can be placed on the air-entry and/or the air-exit side of the filter.
- High-capacity and turbine-style filters are available.



SPECIFICATIONS FOR MAGNA SERIES

The filter element shall be factory-constructed by pleating a continuous sheet of glass microfiber media into uniform spaced pleats which are separated by rolled-edge corrugated aluminum. The efficiency shall be 95% (MERV 16), 99.97%, 99.99% or 99.999% based on a near-monodispersed .30 micron size particle. This filter pack shall be encased in a rigid frame of 3/4" particleboard or 18-gauge galvanized steel for the 1000 Series - 99.97%, 1100 Series - 99.99% and 1200 Series - 99.999% (metal frame only) efficiencies (26-gauge galvanized metal frame is used for the 950 Series - 95% MERV 16). The frame shall not exceed 5-7/8" or 11-1/2" in depth, and standard tolerances shall be +/- 1/16" on height and width. A closed-cell neoprene gasket shall be applied to the filter. Each filter shall be packaged into a heavy-duty carton. Filters shall be Classified under U. L. Std. 900.



Glasfloss manufactures a variety of medium and high efficiency air filters which can be specified for LEED certification applications. For specific information on these products, please contact your local Glasfloss Sales Representative.





ADE IN


Distributed by:



"Serving You With Locations Throughout The Nation"


Gasfloss

THE CLEAR CHOICE SINCE 1936

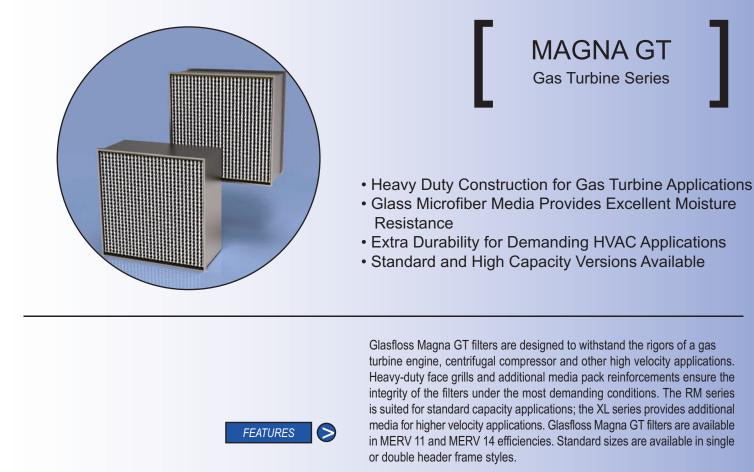

The Glasfloss Magna GT frame shall be made of a 26 gauge galvanized metal. A 26 gauge galvanized steel header shall be used on the metal frame. The media shall be constructed of a water resistant, inorganic glass microfiber. For quality assurance, the glass microfiber media rolls are randomly tested and certified to meet minimum efficiency requirements by the media manufacturer. The media pack shall consist of a continuous sheet of the pleated glass microfiber. The pleated media pack is separated with multiple rolled edge corrugated aluminum separators. The media cartridge shall be sealed at the air entering, center and air leaving sides with a sealant that bonds the media and separators to the interior of the frame filter. A 1/4" neoprene thick gasket shall be applied on the filter. An expanded metal face guard is installed on the air entering and air leaving sides of the frame to insure filter integrity and increase rigidity. The expanded metal shall be galvanized to resist rust and corrosion. The filter shall be rated to withstand temperatures up to 180 degrees Fahrenheit. The filters shall be Classified under U.L. Std. 900 and withstand up to 11 in. w.g. in an "Air Filter Breaching Test." Magna GT Series shall have the following performance.





"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com • (214) 741-7056 PRODUCT BULLETIN 10A-1 • SECTION 10 • 2-13-2023



MAGNA GT Gas Turbine Series


600 Series MERV 11

BASE MODEL NUMBER	SIZE H x W x D NOMINAL		RAT VELO FP RM	CITY M	INIT RES IN. V RM	IST.	MEI SQU FE RM	ARE		SIZE H x W x D NOMINAL MM	RAT VELO M RM	CITY	INIT RES PASC RM	IST. CALS
2412A1	24 x 12 x 6	23-3/8 x 11-3/8 x 5-7/8	250	250	.30	.25	25.59	33.47	Γ	610 x 305 x 152	4575	4575	74.64	62.2
2424A1	24 x 24 x 6	23-3/8 x 23-3/8 x 5-7/8	250	250	.30	.25	52.89	69.17		610 x 610 x 152	4575	4575	74.64	62.2
2412B1	24 x 12 x 12	23-3/8 x 11-3/8 x 11-1/2	500	500	.55	.50	51.19	66.94		610 x 305 x 305	9150	9150	136.84	124.4
2424B1	24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2	500	500	.55	.50	105.79	138.34		610 x 610 x 305	9150	9150	136.84	124.4


900 Series MERV 14

BASE MODEL NUMBER	SIZE H x W x D NOMINAL		RAT VELO FP RM	CITY	INIT RES IN. V RM	IST.	ME SQU FE RM	ARE		SIZE H x W x D NOMINAL MM	RAT VELO M/ RM	CITY	INIT RES PASC RM	IST.
2412A3	24 x 12 x 6	23-3/8 x 11-3/8 x 5-7/8	250	250	.40	.35	25.59	33.47	ſ	610 x 305 x 152	4575	4575	99.52	87.08
2424A3	24 x 24 x 6	23-3/8 x 23-3/8 x 5-7/8	250	250	.40	.35	52.89	69.17		610 x 610 x 152	4575	4575	99.52	87.08
2412B3	24 x 12 x 12	23-3/8 x 11-3/8 x 11-1/2	500	500	.65	.60	51.19	66.94		610 x 305 x 305	9150	9150	161.72	149.28
2424B3	24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2	500	500	.65	.60	105.79	138.34		610 x 610 x 305	9150	9150	161.72	149.28

Tolerances shall be +/- 1/16" for height, width and depth. The frame depth shall not exceed 5-7/8" and 11-1/2". Performance values based on ASHRAE and in-house testing methods.



MINIMUM PARTICLE SIZE EFFICIENCY Test Filter Size 24" x 24" x 12" Nominal








"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.




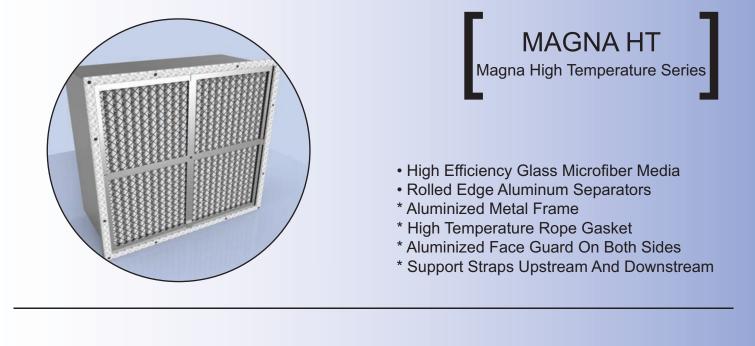



The GlasFloss Magna series HT grade air filters are designed for high efficiency commercial and industrial applications. The Glasfloss Magna HT filters are available in MERV 11, 13 and 14 performances. Glasfloss Magna HT filters are produced in a wide range of sizes, in single or double header combinations.

The Glasfloss Magna HT frame shall be made of heavy-duty aluminized steel. The media shall be constructed of water resistant, inorganic glass microfiber. For quality assurance, the glass microfiber media rolls are randomly tested and certified to meet minimum efficiency requirements by the media manufacturer. The media pack shall consist of a continuous sheet of pleated glass microfiber. The pleated media pack is separated with multiple rolled-edge corrugated aluminum separators. Aluminized faceguards and support struts are installed on the air entering and air leaving sides of the frame to ensure filter integrity and increased rigidity. Operating temperatures range from 350 to 900 degrees Fahrenheit. A 1/8" thick high temperature rope gasket shall be applied to the filter. The 350, 500, 750 and 900 Series Magna HT filters shall be classified under U.L. std 900.

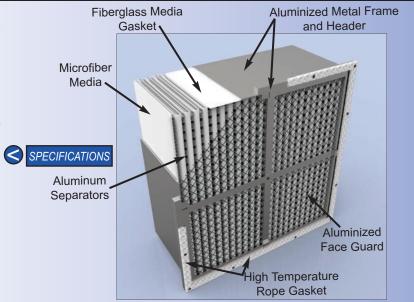

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com • (214) 741-7056 PRODUCT BULLETIN 10MAGHT • SECTION 10 • 1-8-2020




MTERV MTERV MTEV MTR MT		BASE MODEL NUMBEI	R	SIZE H x W x D NOMINAL	SIZE H x W x D EXACT	RATED VELOCITY FPM	F I	NITIA RESIST N. W.C	Г. Э.	MEDIA SQUARE FEET	SIZE H x W x D NOMINAL	RATED VELOCITY M/H	R PA	NITIA RESIST ASCAI	г. С.S
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$											MM				
2020A1 2020A2 2020A3 20 x 24 x 6 193/8 x 193/8 x 57/8 250 30 32 35 40.0 56 x 508 x 152 4575 74.6 79.6 87.1 202A1 2024A2 2024A3 20 x 24 x 6 233/8 x 233/8 x 57/8 250 30 32 35 57.75 610 x 500 x 152 4575 74.6 79.6 87.1 2120B1 2020B2 2020B3 20 x 20 x 12 253/8 x 113/8 x 11.1/2 500 55 6.3 6.8 80.21 610 x 500 x 305 9150 156.8 156.7 169.2 2020B1 2020B2 2020B3 20 x 20 x 12 93/8 x 133/8 x 11.1/2 500 55 6.3 6.8 96.25 610 x 610 x 305 9150 156.8 156.7 169.2 2024B1 2442A2 244B3 24 x 12 x 6 233/8 x 31.3 x 57/8 250 25 28 30 55.03 610 x 305 x 152 457.5 62.2 69.6 74.6 202A1 202A2 202A3 202A3 202A3							350	Seri	es						
2024A1 2024A2 2024A3 20 x 4 x 6 20.378 x 23.378 x 57/8 250 .30 32 .35 48.13 610 x 508 x 152 457.5 74.6 79.6 87.1 2024A1 2244A3 24 x 24 x 6 23.378 x 53/8 x 55/8 250 .30 .32 .35 57.75 610 x 610 x 152 457.5 74.6 79.6 87.1 2020B1 2020B2 2020B3 20 x 20 x 12 19.378 x 13.378 x 11.1/2 500 .55 6.3 68 90.25 610 x 610 x 305 9150 136.8 156.7 169.2 2020B1 2024B2 2024B3 24 x 21 x 12 23.378 x 23.378 x 11.1/2 500 .55 6.3 68 15.50 610 x 610 x 305 x 152 457.5 62.2 60.6 74.6 2020A1 2020Z2 2020A3 200 x 20 x 6 613/3 x 13/8 x 57/8 250 .25 28 .30 48.0 508 x 508 x 152 457.5 62.2 60.6 74.6 2020A1 2020Z2 2020A3 2020A2 20	2412A1	2412A2	2412A3	24 x 12 x 6	23-3/8 x 11-3/8 x 5-7/8	250	.30	.32	.35	28.88	610 x 305 x 152	4575	74.6	79.6	87.1
12424.1 2424.2 2424.2 2424.3 24 × 24 × 6 23.3/8 × 23.3/8 × 57/8 250 .30 .32 .35 57.75 610 × 610 × 152 4575 74.6 79.6 87.1 2412B1 2412B3 24 × 12 × 12 23.3/8 × 11-3/8 × 11-3/8 × 11-3/8 500 .55 .63 .68 80.21 508 × 808 × 305 9150 136.8 156.7 160.2 2024B1 2024B2 2024B3 20 × 24 × 12 19.3/8 × 19.3/8 × 11-1/2 500 .55 6.3 .68 96.25 .610 × 610 × 305 9150 136.8 156.7 160.2 2424B1 2442B3 24 × 12 × 6 23.3/8 × 11-3/8 × 57/8 250 .25 .28 .30 35.00 .610 × 305 × 152 457.5 .62.2 69.6 74.6 2020A1 2020A2 2020A3 20 × 24 × 6 23.3/8 × 15.7 250 .25 .28 .30 38.33 610 × 610 × 610 × 305 9150 113.6 16.7 60.2 69.6 74.6 2020A1 2020A2 2020A3 20 × 24 × 2 6 23.3/8 × 15.4 250 .25 28 <td>2020A1</td> <td>2020A2</td> <td>2020A3</td> <td>20 x 20 x 6</td> <td>19-3/8 x 19-3/8 x 5-7/8</td> <td>250</td> <td>.30</td> <td>.32</td> <td>.35</td> <td>40.10</td> <td>508 x 508 x 152</td> <td>4575</td> <td>74.6</td> <td>79.6</td> <td>87.1</td>	2020A1	2020A2	2020A3	20 x 20 x 6	19-3/8 x 19-3/8 x 5-7/8	250	.30	.32	.35	40.10	508 x 508 x 152	4575	74.6	79.6	87.1
2412B1 2412B2 2412B3 24 x 12 x 12 23/x x 11.3/x x 11.1/2 500 .55 .63 .68 57.75 610 x 305 x 305 9150 136.8 156.7 169.2 2020B1 2020B2 2020B3 20 x 24 x 12 19.3/x 21.9/x 21.3/x 11.1/2 500 .55 .63 .68 80.21 508 x 508 x 305 9150 136.8 156.7 169.2 2424B1 2424B2 2424B3 24 x 24 x 12 23.3/8 x 11.3/8 x 57/8 250 .55 .63 .68 9150 136.8 156.7 169.2 2020A1 2020A2 2020A3 20 x 24 x 12 23.3/8 x 13.3/8 x 57/8 250 .25 .28 .30 35.00 610 x 508 x 152 457.5 6.2.2 69.6 74.6 2020A1 2020A2 2020A3 20 x 24 x 6 23.3/8 x 23.3/8 x 57/8 250 .25 .28 .30 70.00 610 x 508 x 152 457.5 6.2.2 69.6 74.6 2424A1 2424A2 2424A2 242A3 242A42 <t< td=""><td>2024A1</td><td>2024A2</td><td>2024A3</td><td>20 x 24 x 6</td><td>20-3/8 x 23-3/8 x 5-7/8</td><td>250</td><td>.30</td><td>.32</td><td>.35</td><td>48.13</td><td>610 x 508 x 152</td><td>4575</td><td>74.6</td><td>79.6</td><td>87.1</td></t<>	2024A1	2024A2	2024A3	20 x 24 x 6	20-3/8 x 23-3/8 x 5-7/8	250	.30	.32	.35	48.13	610 x 508 x 152	4575	74.6	79.6	87.1
2020B1 2020B2 2022B3 20 x 20 x 12 193/8 x 193/8 x 11-1/2 500 .55 6.3 6.8 80.21 508 x 508 x 305 9150 136.8 156.7 169.2 2024B1 2042B2 2042B3 24 x 24 x 12 233/8 x 233/8 x 11-1/2 500 .55 6.3 6.68 96.25 610 x 508 x 305 9150 136.8 156.7 169.2 COUSTING Series 2020A3 20 x 24 x 12 233/8 x 13/8 x 15/8 250 25 2.8 30 35.00 610 x 305 x 152 4575 62.2 69.6 74.6 2024A1 2024A2 2024A3 20 x 24 x 6 233/8 x 23/8 x 57/8 250 .25 .28 .30 70.00 610 x 508 x 152 4575 62.2 69.6 74.6 2024A1 2024A2 2024A3 20 x 24 x 6 233/8 x 23/8 x 11-1/2 500 .45 .57 .62 70.0 610 x 508 x 152 4575 62.2 66.6 74.6 20204B1 2024B2 2024B3	2424A1	2424A2	2424A3	24 x 24 x 6	23-3/8 x 23-3/8 x 5-7/8	250	.30	.32	.35	57.75	610 x 610 x 152	4575	74.6	79.6	87.1
2024B1 2024B2 2024B3 20 x 24 x 12 193/8 x 233/8 x 11-1/2 500 .55 63 .68 96.25 610 x 508 x 305 9150 136.8 156.7 169.2 2424B1 2424B2 2424B3 24 x 12 x 12 233/8 x 233/8 x 11-1/2 500 .55 63 .68 96.25 610 x 508 x 305 9150 136.8 156.7 169.2 CBOD Series 2412A1 2412A2 2412A3 24 x 12 x 6 233/8 x 11-3/8 x 57/8 250 .25 .28 .30 48.61 508 x 508 x 152 4575 62.2 69.6 74.6 2020A1 2020A2 2024A3 20 x 24 x 6 233/8 x 23.4/8 57/8 250 .25 .28 .30 58.33 610 x 508 x 305 9150 111.9 141.8 143.3 2020B1 2020B2 20 x 20 x 6 23/8 x 33/8 x 57/8 250 .25 .8 .30 70.00 610 x 508 x 305 9150 111.9 141.8 143.3 2020B1 2020B2	2412B1	2412B2	2412B3	24 x 12 x 12	23-3/8 x 11-3/8 x 11-1/2	500		.63	.68		610 x 305 x 305	9150	136.8	156.7	169.2
2424B1 2424B2 2424B2 2424B1 24 x 2 x x 12 23/3 x 23/3 x 11-1/2 500 .55 .63 .68 115.50 610 x 610 x 305 9150 136.8 156.7 169.2 CBU COUNT 2000.1 2000.20 2000.30 2000.20 2000.30 2000.20 2000.30 2000.20 200.30 200.20 25 28 .30 58.00 610 x 505 x 152 4575 62.2 69.6 74.6 2024A1 2024A2 2024A3 20 x 24 x 6 233/8 x 15.78 250 .25 .28 .30 58.33 610 x 508 x 152 4575 62.2 69.6 74.6 2024A1 2024A2 2024A3 24 x 24 x 6 233/8 x 13.78 x 57.78 250 .25 .28 .30 70.00 610 x 508 x 152 4575 62.2 69.6 74.6 2020B1 2020B2 2020B3 20 x 20 x 12 19.3/8 x 19.3/8 x 11-1/2 500 .45 .57 .62 97.22 508 x 508 x 503 <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>.68</td><td></td><td>508 x 508 x 305</td><td></td><td>136.8</td><td>156.7</td><td></td></td<>									.68		508 x 508 x 305		136.8	156.7	
	2024B1			20 x 24 x 12	19-3/8 x 23-3/8 x 11-1/2	500		.63	.68	96.25	610 x 508 x 305	9150	136.8	156.7	169.2
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$	2424B1	2424B2	2424B3	24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2	500	.55	.63	.68	115.50	610 x 610 x 305	9150	136.8	156.7	169.2
2020A1 2020A2 2020A3 20 x 20 x 6 193/8 x 193/8 x 57/8 250 .25 .28 .30 48.61 508 x 508 x 152 4575 62.2 69.6 74.6 2024A1 2024A2 2024A3 20 x 24 x 6 203/8 x 233/8 x 57/8 250 .25 .28 .30 70.00 610 x 610 x 152 4575 62.2 69.6 74.6 2424A1 2424A2 2424A3 24 x 12 x 12 233/8 x 13.78 x 11.1/2 500 .45 .57 .62 97.22 508 x 508 x 305 9150 111.9 141.8 154.3 2020B1 2020B2 2020B3 20 x 20 x 12 193/8 x 13.78 x 11.1/2 500 .45 .57 .62 160.7 610 x 508 x 305 9150 111.9 141.8 154.3 2024B2 2024B2 2024B3 20 x 20 x 6 193/8 x 13.78 x 57/8 250 .20 .23 .25 60.76 508 x 508 x 152 4575 49.7 57.2 62.2 2024A1 2020A2 2020A3 20 x 20 x						:	500	Seri	es						
2024A1 2024A2 2024A3 20 x 24 x 6 203/8 x 23.3/8 x 5.7/8 250 .25 .28 .30 58.33 610 x 508 x 152 4575 62.2 69.6 74.6 2424A1 2424A2 2424A3 24 x 12 x 12 23.3/8 x 23.3/8 x 5.7/8 250 .25 .28 .30 70.00 610 x 610 x 152 4575 62.2 69.6 74.6 2412B1 2412B2 2412B3 24 x 12 x 12 23.3/8 x 11-3/8 x 11-1/2 500 .45 .57 .62 71.00 610 x 508 x 305 9150 111.9 141.8 154.3 2024B1 2024B2 2024B3 20 x 24 x 12 23.3/8 x 23.3/8 x 11-1/2 500 .45 .57 .62 116.67 610 x 508 x 305 9150 111.9 141.8 154.3 2020A1 2024B2 2024B3 24 x 24 x 12 23.3/8 x 13.48 x 5.7/8 250 .20 .23 .25 60.76 508 x 508 x 152 4575 49.7 57.2 62.2 2024A1 2024A2 2024A3	2412A1	2412A2	2412A3	24 x 12 x 6	23-3/8 x 11-3/8 x 5-7/8	250	.25	.28	.30	35.00	610 x 305 x 152	4575	62.2	69.6	74.6
2424A1 2424A2 2424A3 24 x 24 x 6 233/8 x 233/8 x 57/8 250 .25 .28 .30 70.00 610 x 610 x 152 4575 62.2 69.6 74.6 2412B2 2412B2 2412B2 24 x 12 x 12 233/8 x 11-3/4 x 11-1/2 500 .45 .57 .62 97.02 508 x 508 x 305 9150 111.9 141.8 154.3 2020B1 2020B2 2020B3 20 x 20 x 12 193/8 x 233/8 x 11-1/2 500 .45 .57 .62 97.22 508 x 508 x 305 9150 111.9 141.8 154.3 2024B1 2024B2 2024B3 24 x 24 x 12 233/8 x 233/8 x 11-1/2 500 .45 .57 .62 116.67 610 x 505 x 152 .4575 .49.7 .57.2 .62.2 2024B1 2424B2 2412A2 2412A2 2412A3 24 x 12 x 6 233/8 x 11-3/8 x 57/8 .250 .20 .23 .25 60.76 508 x 508 x 152 .4575 .49.7 .57.2 .62.2 2024A1 2024A2 2024A3 20 x 24 x 6 203/8 x 23/8 x 1-3/8 x 1-3/8 x 1-3/8 .50	2020A1	2020A2	2020A3	20 x 20 x 6	19-3/8 x 19-3/8 x 5-7/8	250	.25	.28	.30	48.61	508 x 508 x 152	4575	62.2	69.6	74.6
2412B1 2412B2 2412B2 2412B2 2412B2 2412B2 2412B2 242B2 2020B3 200 x 20 x 12 193/8 x 193/8 x 11-1/2 500 45 57 62 97.22 508 x 508 x 305 9150 111.9 141.8 154.3 2020B1 2024B2 2024B2 2024B3 20 x 24 x 12 193/8 x 233/8 x 11-1/2 500 45 57 62 116.67 610 x 508 x 305 9150 111.9 141.8 154.3 2024B2 2024B2 2024B2 2424B3 242 A2 x 12 233/8 x 13/8 x 11-1/2 500 45 57 62 116.67 610 x 305 x 305 9150 111.9 141.8 154.3 2424B1 2424B2 2424B2 2424B3 242 A2 x 12 233/8 x 13/8 x 11.4/2 500 .45 .57 .62 116.67 610 x 305 x 152 457.5 49.7 .57.2 62.2 2020A1 2020A2 2020A3 20 x 24 x 6 233/8 x 13/8 x 57/8 250 .20 23 .25 610 x 508 x 152 457.5 49.7 57.2 62.2 2020A1 2024A2 20	2024A1	2024A2	2024A3	20 x 24 x 6	20-3/8 x 23-3/8 x 5-7/8	250	.25	.28	.30	58.33	610 x 508 x 152	4575	62.2	69.6	74.6
2020B1 2020B2 2020B3 20 x 20 x 12 193/8 x 193/8 x 11-1/2 500 45 57 62 97.22 508 x 508 x 305 9150 111.9 141.8 154.3 2024B1 2024B2 2024B3 20 x 24 x 12 233/8 x 233/8 x 11-1/2 500 45 57 62 116.67 610 x 508 x 305 9150 111.9 141.8 154.3 2424B1 2424B2 242 x 24 x 12 233/8 x 233/8 x 11-1/2 500 45 57 62 116.67 610 x 508 x 305 9150 111.9 141.8 154.3 TOTOM SUBSENTS Colspan="4">Colspan=#4"Colspan="4">Colspan="4">Colspan="4">Colspan="4">Colspan="4">Colspan="4">Colspan="4">Colspan="4">Colspan="4">Colspan="4">Colspan="4">Colspan="4">Colspan="4">Colspan="4">Colspan=#4"Colspan="4">Colspan=#4"Colspan="4">Colspan=#4"Colspan="4">Colspan="4">Colspan=#4"Colspan="4">Colspan=#4"Colspan="4">Colspan=#4"Colspan="4">Colspan=#4"Colspan="4">Colspan=#4"Colspan="4">Colspan=#4"Colspan=#4"Colspan="4">Colspan=#4"Colspan=#4"Colspan=#4"Colspan=#4"Colspan="4">Colspan=#4"Colspan=#4"Colspan=#4"Cols	2424A1	2424A2	2424A3	24 x 24 x 6	23-3/8 x 23-3/8 x 5-7/8	250	.25	.28	.30	70.00	610 x 610 x 152	4575	62.2	69.6	74.6
2024B1 2024B2 2024B3 20 x 24 x 12 193/8 x 23-3/8 x 11-1/2 500 45 57 62 116.67 610 x 508 x 305 9150 111.9 141.8 154.3 2424B1 2424B2 2424B3 24 x 24 x 12 23-3/8 x 23-3/8 x 11-1/2 500 45 57 62 116.67 610 x 508 x 305 9150 111.9 141.8 154.3 2424B1 2424B2 2424B3 24 x 24 x 12 23-3/8 x 23-3/8 x 57/8 250 .20 23 .25 610 x 305 x 152 4575 49.7 57.2 62.2 2024A1 2024A2 2024A2 202 x 4x 6 23-3/8 x 57/8 250 .20 23 .25 87.50 610 x 508 x 152 457.5 49.7 57.2 62.2 244A1 2424A2 2424A2 2424A2 2424A3 24 x 24 x 6 23-3/8 x 57/8 250 .20 23 .25 87.50 610 x 508 x 152 457.5 49.7 57.2 62.2 2424B1 2412B2 2412B3 2	2412B1	2412B2	2412B3	24 x 12 x 12	23-3/8 x 11-3/8 x 11-1/2	500	.45	.57	.62	70.00	610 x 305 x 305	9150	111.9	141.8	154.3
2424B1 2424B2 2412A1 2412A2 2412A2 2412A3 24x 12 x 6 233/8 x 11-3/8 x 57/8 250 .20 .23 .25 43.75 610 x 305 x 152 4575 49.7 57.2 62.2 2020A1 202A2 202A3 20 x 20 x 6 19-3/8 x 19-3/8 x 57/8 250 .20 .23 .25 60.76 508 x 508 x 152 4575 49.7 57.2 62.2 2024A1 2024A2 2024A3 20 x 24 x 6 23-3/8 x 13/8 x 57/8 250 .20 .23 .25 87.50 610 x 508 x 152 4575 49.7 57.2 62.2 2424B1 2424A2 2424A3 24 x 42 x 6 23-3/8 x 13/8 x 11-1/2 500 .40 .53 .58 87.50 610 x 305 x 305 9150 99.5 131.8 144.3 2020B1 2020B2 2020B3 20 x 24 x 12 23-3/8 x 11-3/8 x 57/8 250	2020B1	2020B2	2020B3	20 x 20 x 12	19-3/8 x 19-3/8 x 11-1/2	500	.45	.57	.62	97.22	508 x 508 x 305	9150	111.9	141.8	154.3
750 Series 2412A1 2412A2 2412A3 24 x 12 x 6 233/8 x 11-3/8 x 5-7/8 250 .20 .23 .25 43.75 610 x 305 x 152 4575 49.7 57.2 62.2 2020A1 2020A2 2020A3 20 x 20 x 6 193/8 x 193/8 x 5-7/8 250 .20 .23 .25 60.76 508 x 508 x 152 4575 49.7 57.2 62.2 2024A1 2024A2 2024A3 20 x 24 x 6 203/8 x 233/8 x 5-7/8 250 .20 .23 .25 87.50 610 x 610 x 152 4575 49.7 57.2 62.2 2424A1 2424A2 2424A3 24 x 24 x 6 233/8 x 233/8 x 5-7/8 250 .20 .23 .25 87.50 610 x 610 x 152 4575 49.7 57.2 62.2 2412B1 2412B2 2412B3 2412B3 2412B3 24 x 12 x 12 233/8 x 11-1/2 500 .40 .53 .58 121.53 508 x 508 x 305 9150 99.5 131.8 144.3	2024B1	2024B2	2024B3	20 x 24 x 12	19-3/8 x 23-3/8 x 11-1/2	500	.45	.57	.62	116.67	610 x 508 x 305	9150	111.9	141.8	154.3
2412A1 2412A2 2412A3 24 x 12 x 6 233/8 x 11-3/8 x 5-7/8 250 .20 .23 .25 43.75 610 x 305 x 152 4575 49.7 57.2 62.2 2020A1 2020A2 2020A3 20 x 20 x 6 193/8 x 193/8 x 5-7/8 250 .20 .23 .25 60.76 508 x 508 x 152 4575 49.7 57.2 62.2 2024A1 2024A2 2024A3 20 x 24 x 6 203/8 x 233/8 x 5-7/8 250 .20 .23 .25 72.92 610 x 305 x 152 4575 49.7 57.2 62.2 2424A1 242A2 242A3 24 x 24 x 6 233/8 x 233/8 x 5-7/8 250 .20 .23 .25 87.50 610 x 305 x 152 4575 49.7 57.2 62.2 2412B1 2412B2 2412B3 24 x 12 x 12 233/8 x 233/8 x 5-7/8 250 .20 .23 .25 87.50 610 x 305 x 152 4575 49.7 57.2 62.2 2412B1 2412B2 2412B3 24 x 12 x 12 233/8 x 13/8 x 11-1/2 500 .40 .53 .58 121.53 5	2424B1	2424B2	2424B3	24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2	500	.45	.57	.62	140.00	610 x 610 x 305	9150	111.9	141.8	154.3
2020A1 2020A2 2020A3 20 x 20 x 6 19-3/8 x 19-3/8 x 5-7/8 250 .20 .23 .25 60.76 508 x 508 x 152 4575 49.7 57.2 62.2 2024A1 2024A2 2024A3 20 x 24 x 6 20-3/8 x 23-3/8 x 5-7/8 250 .20 .23 .25 72.92 610 x 508 x 152 4575 49.7 57.2 62.2 2424A1 2424A2 242A3 24 x 24 x 6 23-3/8 x 23-3/8 x 5-7/8 250 .20 .23 .25 87.50 610 x 610 x 152 4575 49.7 57.2 62.2 2412B1 2412B2 2412B3 24 x 12 x 12 23-3/8 x 11-3/8 x 11-1/2 500 .40 .53 .58 87.50 610 x 305 x 305 9150 99.5 131.8 144.3 2020B1 2024B2 2024B3 20 x 24 x 12 23-3/8 x 23-3/8 x 11-1/2 500 .40 .53 .58 161 x 508 x 305 9150 99.5 131.8 144.3 2024B1 2024B2 2024B3 20 x 24 x 12 23-3/8 x 13-3/8 x 1-1/2 500 .40 .53 .58 1610 x 305 x 152							750	Seri	es						
2024A1 2024A2 2024A3 20 x 24 x 6 203/8 x 233/8 x 57/8 250 .20 .23 .25 77.92 610 x 508 x 152 4575 49.7 57.2 62.2 2424A1 2424A2 2424A3 24 x 24 x 6 233/8 x 233/8 x 57/8 250 .20 .23 .25 87.50 610 x 508 x 152 4575 49.7 57.2 62.2 2412B1 2412B2 2412B3 24 x 12 x 12 233/8 x 1-3/8 x 11-1/2 500 .40 .53 .58 87.50 610 x 508 x 305 9150 99.5 131.8 144.3 2020B1 2020B2 2020B3 20 x 24 x 12 193/8 x 193/8 x 11-1/2 500 .40 .53 .58 121.53 508 x 508 x 305 9150 99.5 131.8 144.3 2024B1 2024B2 2024B3 20 x 24 x 12 233/8 x 13/8 x 11-1/2 500 .40 .53 .58 145.83 610 x 305 x 152 4575 44.8 49.7 54.7 2020A1 2020A2 2020A3 20 x 24 x 6 233/8 x 11-3/8 x 57/8 250 .18 .20 .22 72.92	2412A1	2412A2	2412A3	24 x 12 x 6	23-3/8 x 11-3/8 x 5-7/8	250	.20	.23	.25	43.75	610 x 305 x 152	4575	49.7	57.2	62.2
2424A1 2424A2 2424A3 24x 24 x 6 23.3/8 x 23.3/8 x 5.7/8 250 .20 .23 .25 87.50 610 x 610 x 152 4575 49.7 57.2 62.2 2412B1 2412B2 2412B3 24 x 12 x 12 23.3/8 x 11-3/8 x 11-1/2 500 .40 .53 .58 87.50 610 x 610 x 152 4575 49.7 57.2 62.2 2020B1 2020B2 2020B3 20 x 20 x 12 19.3/8 x 19.3/8 x 11-1/2 500 .40 .53 .58 121.53 508 x 508 x 305 9150 99.5 131.8 144.3 2024B1 2024B2 2024B3 24 x 24 x 12 23.3/8 x 23.3/8 x 11-1/2 500 .40 .53 .58 175.00 610 x 610 x 305 9150 99.5 131.8 144.3 2424B1 2424B2 2424B3 24 x 24 x 12 23.3/8 x 23.3/8 x 11-1/2 500 .40 .53 .58 175.00 610 x 610 x 305 9150 99.5 131.8 144.3 2424B1 2424B2 2424B3 24 x 12 x 6 23.3/8 x 11-3/8 x 15.7/8 250 .18 .20 .22	2020A1	2020A2	2020A3	20 x 20 x 6	19-3/8 x 19-3/8 x 5-7/8	250	.20	.23	.25	60.76	508 x 508 x 152	4575	49.7	57.2	62.2
2412B1 2412B2 2412B3 24 x 12 x 12 23.3/8 x 11-3/8 x 11-1/2 500 .40 .53 .58 87.50 610 x 305 x 305 9150 99.5 131.8 144.3 2020B1 2020B2 2020B3 20 x 20 x 12 19.3/8 x 19.3/8 x 11-1/2 500 .40 .53 .58 121.53 508 x 508 x 305 9150 99.5 131.8 144.3 2024B1 2024B2 2024B3 20 x 24 x 12 19.3/8 x 23.3/8 x 11-1/2 500 .40 .53 .58 145.83 610 x 508 x 305 9150 99.5 131.8 144.3 2424B1 2424B2 2424B2 2424B3 24 x 24 x 12 23.3/8 x 23.3/8 x 11-1/2 500 .40 .53 .58 175.00 610 x 610 x 305 9150 99.5 131.8 144.3 2412A1 2412A2 2412A3 24 x 12 x 6 23.3/8 x 11-3/8 x 5-7/8 250 .18 .20 .22 52.50 610 x 305 x 152 457.5 44.8 49.7 54.7 2020A1 2020A2 2020A3 20 x 20 x 6 19.3/8 x 19.3/8 x 5-7/8 250 .18 .20	2024A1	2024A2	2024A3	20 x 24 x 6	20-3/8 x 23-3/8 x 5-7/8	250	.20	.23	.25	72.92	610 x 508 x 152	4575	49.7	57.2	62.2
2020B1 2020B2 2020B3 20 x 20 x 12 19.3/8 x 19.3/8 x 11.1/2 500 .40 .53 .58 121.53 508 x 508 x 305 9150 99.5 131.8 144.3 2024B1 2024B2 2024B3 20 x 24 x 12 19.3/8 x 23.3/8 x 11.1/2 500 .40 .53 .58 145.83 610 x 508 x 305 9150 99.5 131.8 144.3 2424B1 2424B2 2424B3 24 x 24 x 12 23.3/8 x 23.3/8 x 11.1/2 500 .40 .53 .58 175.00 610 x 508 x 305 9150 99.5 131.8 144.3 2424B1 2424B2 2424B3 24 x 24 x 12 23.3/8 x 23.3/8 x 11.1/2 500 .40 .53 .58 175.00 610 x 305 x 152 44.8 49.7 54.7 2412A1 2412A2 2412A3 24 x 12 x 6 23.3/8 x 11.3/8 x 5.7/8 250 .18 .20 .22 72.92 508 x 508 x 152 44.8 49.7 54.7 2024A1 2024A2 2024A3 20 x 24 x 6 20.3/8 x 23.3/8 x 5.7/8 250 .18 .20 .22 87.50 610 x 508 x 1	2424A1	2424A2	2424A3	24 x 24 x 6	23-3/8 x 23-3/8 x 5-7/8	250	.20	.23	.25	87.50	610 x 610 x 152	4575	49.7	57.2	62.2
2024B1 2024B2 2024B3 20 x 24 x 12 19-3/8 x 23-3/8 x 11-1/2 500 .40 .53 .58 145.83 610 x 508 x 305 9150 99.5 131.8 144.3 2424B1 2424B2 2424B3 24 x 24 x 12 23-3/8 x 23-3/8 x 11-1/2 500 .40 .53 .58 175.00 610 x 508 x 305 9150 99.5 131.8 144.3 PUO Series 2412A1 2412A2 2412A3 24 x 12 x 6 23-3/8 x 11-3/8 x 5-7/8 250 .18 .20 .22 52.50 610 x 305 x 152 4575 44.8 49.7 54.7 2020A1 2020A2 2020A3 20 x 20 x 6 19-3/8 x 19-3/8 x 5-7/8 250 .18 .20 .22 72.92 508 x 508 x 152 4575 44.8 49.7 54.7 2024A1 2024A2 2024A3 20 x 24 x 6 20-3/8 x 23-3/8 x 5-7/8 250 .18 .20 .22 87.50 610 x 508 x 152 4575 44.8 49.7 54.7 2424A1 2424A2 2424A3 24 x 24 x 6 23-3/8 x 23-3/8 x 5-7/8 250	2412B1	2412B2	2412B3	24 x 12 x 12	23-3/8 x 11-3/8 x 11-1/2	500	.40	.53	.58	87.50	610 x 305 x 305	9150	99.5	131.8	144.3
2424B1 2424B2 2424B3 24 x 24 x 12 23-3/8 x 23-3/8 x 11-1/2 500 .40 .53 .58 175.00 610 x 610 x 305 9150 99.5 131.8 144.3 900 Series 2412A1 2412A2 2412A3 24 x 12 x 6 23-3/8 x 11-3/8 x 5-7/8 250 .18 .20 .22 52.50 610 x 305 x 152 4575 44.8 49.7 54.7 2020A1 2020A2 2020A3 20 x 20 x 6 19-3/8 x 19-3/8 x 5-7/8 250 .18 .20 .22 72.92 508 x 508 x 152 4575 44.8 49.7 54.7 2024A1 2024A2 2024A3 20 x 24 x 6 20-3/8 x 23-3/8 x 5-7/8 250 .18 .20 .22 87.50 610 x 508 x 152 457.5 44.8 49.7 54.7 2424A1 2424A2 2424A2 2424A3 24 x 24 x 6 23-3/8 x 23-3/8 x 5-7/8 250 .18 .20 .22 87.50 610 x 508 x 152 457.5 44.8 49.7 54.7 2424A1 2424A2 2424A2 2424A3 24 x 24 x 6 23-3/8 x 23-3/8 x	2020B1	2020B2	2020B3	20 x 20 x 12	19-3/8 x 19-3/8 x 11-1/2	500	.40	.53	.58	121.53	508 x 508 x 305	9150	99.5	131.8	144.3
Sector Sector<	2024B1	2024B2	2024B3	20 x 24 x 12	19-3/8 x 23-3/8 x 11-1/2	500	.40	.53	.58	145.83	610 x 508 x 305	9150	99.5	131.8	144.3
2412A1 2412A2 2412A3 24x 12 x 6 23-3/8 x 11-3/8 x 5-7/8 250 .18 .20 .22 52.50 610 x 305 x 152 4575 44.8 49.7 54.7 2020A1 2020A2 2020A3 20 x 20 x 6 19-3/8 x 19-3/8 x 5-7/8 250 .18 .20 .22 72.92 508 x 508 x 152 4575 44.8 49.7 54.7 2024A1 2024A2 2024A3 20 x 24 x 6 20-3/8 x 23-3/8 x 5-7/8 250 .18 .20 .22 87.50 610 x 508 x 152 4575 44.8 49.7 54.7 2424A1 2424A2 2424A3 24 x 24 x 6 23-3/8 x 23-3/8 x 5-7/8 250 .18 .20 .22 105.00 610 x 508 x 152 4575 44.8 49.7 54.7 2412B1 2412B2 2412B3 24 x 12 x 12 23-3/8 x 23-3/8 x 5-7/8 250 .18 .20 .22 105.00 610 x 610 x 152 4575 44.8 49.7 54.7 2412B1 2412B2 2412B3 24 x 12 x 12 23-3/8 x 11-3/8 x 11-1/2 500 .37 .52 .56 105.00 </td <td>2424B1</td> <td>2424B2</td> <td>2424B3</td> <td>24 x 24 x 12</td> <td>23-3/8 x 23-3/8 x 11-1/2</td> <td>500</td> <td>.40</td> <td>.53</td> <td>.58</td> <td>175.00</td> <td>610 x 610 x 305</td> <td>9150</td> <td>99.5</td> <td>131.8</td> <td>144.3</td>	2424B1	2424B2	2424B3	24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2	500	.40	.53	.58	175.00	610 x 610 x 305	9150	99.5	131.8	144.3
2020A1 2020A2 2020A3 20 x 20 x 6 19-3/8 x 19-3/8 x 5-7/8 250 .18 .20 .22 72.92 508 x 508 x 152 4575 44.8 49.7 54.7 2024A1 2024A2 2024A3 20 x 24 x 6 20-3/8 x 23-3/8 x 5-7/8 250 .18 .20 .22 87.50 610 x 508 x 152 4575 44.8 49.7 54.7 2424A1 2424A2 2424A3 24 x 24 x 6 23-3/8 x 23-3/8 x 5-7/8 250 .18 .20 .22 105.00 610 x 508 x 152 4575 44.8 49.7 54.7 2412B1 2412B2 2412B3 24 x 12 x 12 23-3/8 x 11-3/8 x 11-1/2 500 .37 .52 .56 105.00 610 x 305 x 305 9150 92.1 129.3 139.3 2020B1 2020B2 2020B3 20 x 20 x 12 19-3/8 x 19-3/8 x 11-1/2 500 .37 .52 .56 145.83 508 x 508 x 305 9150 92.1 129.3 139.3 2024B1 2024B2 2024B3 20 x 24 x 12 19-3/8 x 23-3/8 x 11-1/2 500 .37 .52 .56 <td< td=""><td></td><td></td><td></td><td></td><td>•</td><td></td><td>900</td><td>Seri</td><td>es</td><td></td><td></td><td></td><td></td><td></td><td></td></td<>					•		900	Seri	es						
2024A1 2024A2 2024A3 20 x 24 x 6 20-3/8 x 23-3/8 x 5-7/8 250 .18 .20 .22 87.50 610 x 508 x 152 4575 44.8 49.7 54.7 2424A1 2424A2 2424A3 24 x 24 x 6 23-3/8 x 23-3/8 x 5-7/8 250 .18 .20 .22 105.00 610 x 508 x 152 4575 44.8 49.7 54.7 2412B1 2412B2 2412B3 24 x 12 x 12 23-3/8 x 11-3/8 x 11-1/2 500 .37 .52 .56 105.00 610 x 305 x 305 9150 92.1 129.3 139.3 2020B1 2020B2 2020B3 20 x 20 x 12 19-3/8 x 19-3/8 x 11-1/2 500 .37 .52 .56 145.83 508 x 508 x 305 9150 92.1 129.3 139.3 2024B1 2024B2 2024B3 20 x 24 x 12 19-3/8 x 23-3/8 x 11-1/2 500 .37 .52 .56 175.00 610 x 508 x 305 9150 92.1 129.3 139.3 2024B1 2024B2 2024B3 20 x 24 x 12 19-3/8 x 23-3/8 x 11-1/2 500 .37 .52 .56	2412A1	2412A2	2412A3	24 x 12 x 6	23-3/8 x 11-3/8 x 5-7/8	250	.18	.20	.22	52.50	610 x 305 x 152	4575	44.8	49.7	54.7
2024A1 2024A2 2024A3 20 x 24 x 6 20-3/8 x 23-3/8 x 5-7/8 250 .18 .20 .22 87.50 610 x 508 x 152 4575 44.8 49.7 54.7 2424A1 2424A2 2424A3 24 x 24 x 6 23-3/8 x 23-3/8 x 5-7/8 250 .18 .20 .22 105.00 610 x 610 x 152 4575 44.8 49.7 54.7 2412B1 2412B2 2412B3 24 x 12 x 12 23-3/8 x 11-3/8 x 11-1/2 500 .37 .52 .56 105.00 610 x 305 x 305 9150 92.1 129.3 139.3 2020B1 2020B2 2020B3 20 x 20 x 12 19-3/8 x 19-3/8 x 11-1/2 500 .37 .52 .56 145.83 508 x 508 x 305 9150 92.1 129.3 139.3 2024B1 2024B2 2024B3 20 x 24 x 12 19-3/8 x 23-3/8 x 11-1/2 500 .37 .52 .56 175.00 610 x 508 x 305 9150 92.1 129.3 139.3 2024B1 2024B2 2024B3 20 x 24 x 12 19-3/8 x 23-3/8 x 11-1/2 500 .37 .52 .56	2020A1	2020A2	2020A3	20 x 20 x 6	19-3/8 x 19-3/8 x 5-7/8	250	.18	.20	.22	72.92	508 x 508 x 152	4575	44.8	49.7	54.7
2424A1 2424A2 2424A3 2424A3 242 4x 6 233/8 x 23 3/8 x 57/8 250 .18 .20 .22 105.00 610 x 610 x 152 4575 44.8 49.7 54.7 2412B1 2412B2 2412B3 24 x 12 x 12 23-3/8 x 11-3/8 x 11-1/2 500 .37 .52 .56 105.00 610 x 305 x 305 9150 92.1 129.3 139.3 2020B1 2020B2 2020B3 20 x 20 x 12 19-3/8 x 19-3/8 x 11-1/2 500 .37 .52 .56 145.83 508 x 508 x 305 9150 92.1 129.3 139.3 2024B1 2024B2 2024B3 20 x 24 x 12 19-3/8 x 23-3/8 x 11-1/2 500 .37 .52 .56 145.83 508 x 508 x 305 9150 92.1 129.3 139.3 2024B1 2024B2 2024B3 20 x 24 x 12 19-3/8 x 23-3/8 x 11-1/2 500 .37 .52 .56 175.00 610 x 508 x 305 9150 92.1 129.3 139.3	2024A1														
2020B1 2020B2 2020B3 20 x 20 x 12 19-3/8 x 19-3/8 x 11-1/2 500 .37 .52 .56 145.83 508 x 508 x 305 9150 92.1 129.3 139.3 2024B1 2024B2 2024B3 20 x 24 x 12 19-3/8 x 19-3/8 x 11-1/2 500 .37 .52 .56 145.83 508 x 508 x 305 9150 92.1 129.3 139.3	2424A1	2424A2	2424A3			250	.18	.20	.22	105.00	610 x 610 x 152	4575	44.8	49.7	54.7
2024B1 2024B2 2024B3 20 x 24 x 12 19-3/8 x 23-3/8 x 11-1/2 500 .37 .52 .56 175.00 610 x 508 x 305 9150 92.1 129.3 139.3	2412B1	2412B2	2412B3	24 x 12 x 12	23-3/8 x 11-3/8 x 11-1/2	500	.37	.52	.56	105.00	610 x 305 x 305	9150	92.1	129.3	139.3
2024B1 2024B2 2024B3 20 x 24 x 12 19-3/8 x 23-3/8 x 11-1/2 500 .37 .52 .56 175.00 610 x 508 x 305 9150 92.1 129.3 139.3	2020B1														
													92.1		
$\begin{bmatrix} 2424D1 \\ 2424D2 \\ 2424D2 \\ 2424D3 \\ 24x24x12 \\ 25.0 \\ x24x12 \\ 25.0 \\ x25.0 \\ x25.$	2424B1	2424B2	2424B3	24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2	500	.37	.52	.56	210.00	610 x 610 x 305	9150	92.1	129.3	139.3

Tolerances shall be +/- 1/16" for height, width and depth. The frame depth shall not exceed 5-7/8" and 11-1/2". Performance values based on ASHRAE and in-house testing methods.

STANDARD PRESSURE DROP Test Filter Size 24" x 24" x 12" Nominal 0.7 **RESISTANCE IN. W.G.** 0.6 BOX STYLE 0.5 0.4 0.3 0.2 0.1 250 300 350 400 450 500 **AIR FLOW RATE, (FPM)** 500 Series MERV 11 500 Series MERV 13 500 Series MERV 14


MINIMUM PARTICLE SIZE EFFICIENCY Test Filter Size 24" x 24" x 12" Nominal





'Serving You With Locations Throughout The Nation"






PURACELL II Mini-Pleat Series

- Compact Design for Maximum Air Flow
- Four Efficiencies Available
- Standard and Special Sizes
- Media Will Not Support Microbial Growth



The Glasfloss Puracell II Mini-Pleat Series is designed for use in applications where a high degree of efficiency is required in a 4" filter. The Puracell II Series combines state-of-the-art mini-pleat construction techniques with superior reliability to offer maximum value for commercial and industrial applications. Additionally, the Puracell II offers unique advantages over the traditional 12" rigid box filter including lower freight costs, reduced storage area requirements and less impact on landfills. The Glasfloss Puracell II comes in a variety of sizes and efficiencies.

The Glasfloss Puracell II filter is a mini-pleat cartridge encapsulated between two heavy-duty beverage board die-cut frames. The die-cut frames are bonded together, creating a double-wall thickness around the perimeter of the filter. The Puracell II pack is pleated wet-laid micro fiber media. The pleats are separated and supported by a uniform glue bead that produces a low initial pressure drop while maximizing the filtration area. The media pack is resistant to moisture and does not support the growth of bacteria and mold. The media pack is thoroughly bonded to the interior of the die-cut frame. The filter shall be rated to withstand temperatures up to 180 degrees Fahrenheit. The recommended final resistance for Puracell II filters is 1.5" w.g.

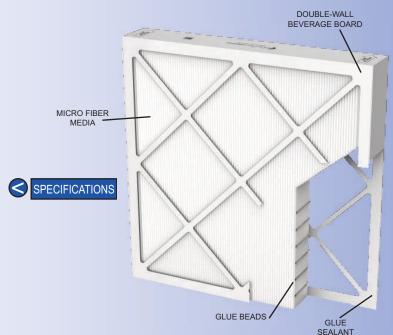

"Serving You With Locations Throughout The Nation"


Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com • (214) 741-7056
PRODUCT BULLETIN 11PUR • SECTION 11 • 11-20-22



SIZE RATED INITIAL FINAL SIZE MODEL SIZE MEDIA WxHxD NUMBER WxHxD VELOCITY RESIST. RESIST. **SQUARE** WxHxD NOMINAL **FPM** IN. W.G. IN. W.G. FEET NOMINAL MM EXACT MERV 15 PURII2424495 23-3/8" x 23-3/8" x 3-3/4" 610 x 610 x 102 24 x 24 x 4 .72 .72 1.50 122.95 500 20 x 25 x 4 *PUR II2025495 19-1/2" x 24-1/2" x 3-3/4" 500 1 50 106.26 508 x 635 x 102 .72 .72 .72 .72 20 x 24 x 4 19-3/8" x 23-3/8" x 3-3/4" PURII2024495 500 1 50 101 90 508 x 610 x 102 19-1/2" x 19-1/2" x 3-3/4" PURII2020495 20 x 20 x 4 500 1 50 84.47 508 x 508 x 102 17-1/2" x 23-1/2" x 3-3/4" 500 PURII1824495 18 x 24 x 4 1 50 91 38 457 x 610 x 102 15-1/2" x 24-1/2" x 3-3/4" .72 PURII1625495 16 x 25 x 4 500 1 50 84 32 406 x 635 x 102 15-1/2" x 19-1/2" x 3-3/4" PURII1620495 16 x 20 x 4 500 1 50 67.03 406 x 508 x 102 .72 PURII1224495 12 x 24 x 4 11-3/8" x 23-3/8" x 3-3/4" 500 1 50 59.82 305 x 610 x 102 MERV 14 PURII242449 24 x 24 x 4 23-3/8" x 23-3/8" x 3-3/4" 500 .68 1.50 122.95 610 x 610 x 102 *PURII202549 20 x 25 x 4 19-1/2" x 24-1/2" x 3-3/4" 500 .68 1.50 106.26 508 x 635 x 102 19-3/8" x 23-3/8" x 3-3/4" PURII202449 20 x 24 x 4 500 1.50 101.90 508 x 610 x 102 .68 PURII202049 20 x 20 x 4 19-1/2" x 19-1/2" x 3-3/4" 500 .68 1.50 84.47 508 x 508 x 102 17-1/2" x 23-1/2" x 3-3/4" PURII182449 18 x 24 x 4 500 1.50 91.38 457 x 610 x 102 .68 16 x 25 x 4 15-1/2" x 24-1/2" x 3-3/4" 500 1.50 84.32 406 x 635 x 102 PURII162549 .68 15-1/2" x 19-1/2" x 3-3/4" PURII162049 16 x 20 x 4 500 .68 1.50 67.03 406 x 508 x 102 PURII122449 12 x 24 x 4 11-3/8" x 23-3/8" x 3-3/4" 500 .68 1.50 59.82 305 x 610 x 102 MERV 13 PURII242448 24 x 24 x 4 23-3/8" x 23-3/8" x 3-3/4" 500 .60 1.50 118.10 610 x 610 x 102 500 *PURII202548 20 x 25 x 4 19-1/2" x 24-1/2" x 3-3/4" 1 50 60 102.08 508 x 635 x 102 PURII202448 20 x 24 x 4 19-3/8" x 23-3/8" x 3-3/4" 500 .60 1 50 97.89 508 x 610 x 102 19-1/2" x 19-1/2" x 3-3/4" PURII202048 20 x 20 x 4 500 .60 1 50 81.14 508 x 508 x 102 17-1/2" x 23-1/2" x 3-3/4" PURII182448 18 x 24 x 4 500 .60 1 50 87.78 457 x 610 x 102 PURI162548 16 x 25 x 4 15-1/2" x 24-1/2" x 3-3/4" 500 .60 1 50 80.75 406 x 635 x 102 PURII162048 16 x 20 x 4 15-1/2" x 19-1/2" x 3-3/4" 500 .60 1.50 64.39 406 x 508 x 102 PURII122448 12 x 24 x 4 11-3/8" x 23-3/8" x 3-3/4" 500 .60 1 50 57.47 305 x 610 x 102 MERV 11 PURII242446 23-3/8" x 23-3/8" x 3-3/4" 610 x 610 x 102 24 x 24 x 4 500 .48 1.50 118.10 *PURII202546 20 x 25 x 4 19-1/2" x 24-1/2" x 3-3/4" 500 .48 1.50 102.08 508 x 635 x 102 20 x 24 x 4 19-3/8" x 23-3/8" x 3-3/4" 500 1.50 97.89 508 x 610 x 102 PURII202446 .48 19-1/2" x 19-1/2" x 3-3/4" 508 x 508 x 102 PURII202046 20 x 20 x 4 500 48 1 50 81 14 18 x 24 x 4 17-1/2" x 23-1/2" x 3-3/4" 500 PURII182446 .48 1.50 457 x 610 x 102 87.78 16 x 25 x 4 15-1/2" x 24-1/2" x 3-3/4" PURI162546 500 1.50 80.75 406 x 635 x 102 48 15-1/2" x 19-1/2" x 3-3/4" 500 PURII162046 16 x 20 x 4 48 1 50 64 39 406 x 508 x 102 11-3/8" x 23-3/8" x 3-3/4" PURII122446 12 x 24 x 4 500 .48 1.50 57.47 305 x 610 x 102

PURACELL II SERIES

Tolerances shall be +/- 1/8" for height, width and +/- 1/16" for depth. Performance values based on ASHRAE and in-house testing methods. *Model Number Size Configuration may be produced as 20x25 or 25x20.

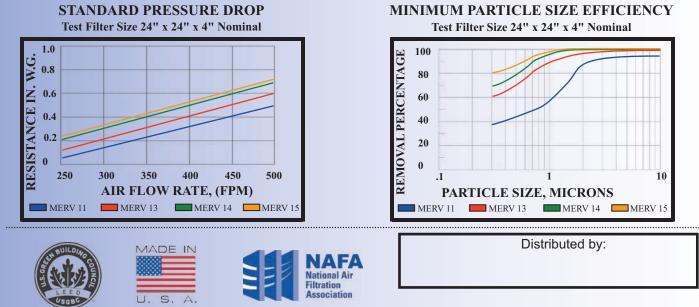

MINIMUM PARTICLE SIZE EFFICIENCY

10

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

www.glasfloss.com · (214) 741-7056





PURACELL II M & MH Mini-Pleat Series

- Compact Design for Maximum Air Flow
- Four Efficiencies Available
- Standard and Special Sizes
- Media Will Not Support Microbial Growth



The Glasfloss Puracell II M & MH Mini-Pleat Series is designed for use in applications where a high degree of efficiency is required in a 4" filter. The Puracell II M & MH Series combines state-of-the-art mini-pleat construction techniques with superior reliability to offer maximum value for commercial and industrial applications. Additionally, the Puracell II M & MH offers unique advantages over the traditional 12" rigid box filter including lower freight costs, reduced storage area requirements and less impact on landfills. The Glasfloss Puracell II M & MH comes in a variety of sizes and efficiencies.

The Glasfloss Puracell II M & MH filter is a minipleat cartridge encapsulated with a heavy-duty 26 gauge galvanized metal frame. An optional gasket can be applied to the filter frame. The galvanized metal frame is riveted together to form a rigid frame. The Puracell II M & MH pack is pleated, wet-laid micro fiber media. The pleats are separated and supported by a uniform glue bead that produces a low initial pressure drop while maximizing the filtration area. The media pack is resistant to moisture and does not support the growth of bacteria and mold. The media pack is thoroughly sealed to the inside of the metal frame to prevent air bypass. A metal face guard shall be secured on the air leaving side. The filter shall be rated to withstand temperatures up to 180 degrees Fahrenheit. The recommended final resistance for Puracell II M & MH filters is 1.5" w.g.



"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com · (214) 741-7056

PRODUCT BULLETIN 11PURM&MH · SECTION 11 · 11-20-22





PURACELL II M & MH SERIES

BASE MODEL NUMBER	SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	RE	TIAL SIST. W.G.	FINAL RESIST. IN. W.G.	SQU	DIA ARE ET	SIZE W x H x D NOMINAL
				Μ	MH		М	MH	MM
			MER	V 15					
242449	24 x 24 x 4	23-3/8" x 23-3/8" x 3-3/4"	500	.68	.71	1.50	122.96	102.12	610 x 610 x 102
*202549	20 x 25 x 4	19-3/8" x 24-3/8" x 3-3/4"	500	.68	.71	1.50	105.37	86.00	508 x 635 x 102
202449	20 x 24 x 4	19-3/8" x 23-3/8" x 3-3/4"	500	.68	.71	1.50	101.05	82.14	508 x 610 x 102
202049	20 x 20 x 4	19-3/8" x 19-3/8" x 3-3/4"	500	.68	.71	1.50	83.76	66.73	508 x 508 x 102
182449	18 x 24 x 4	17-3/8" x 23-3/8" x 3-3/4"	500	.68	.71	1.50	91.31	68.38	457 x 610 x 102
162549	16 x 25 x 4	15-3/8" x 24-3/8" x 3-3/4"	500	.68	.71	1.50	83.79	61.82	406 x 635 x 102
162049	16 x 20 x 4	15-3/8" x 19-3/8" x 3-3/4"	500	.68	.71	1.50	66.60	47.97	406 x 508 x 102
122449	12 x 24 x 4	11-3/8" x 23-3/8" x 3-3/4"	500	.68	.71	1.50	59.65	44.40	305 x 610 x 102
			MER	V 14					
242443	24 x 24 x 4	23-3/8" x 23-3/8" x 3-3/4"	500	.68	.71	1.50	122.96	102.12	610 x 610 x 102
*202543	20 x 25 x 4	19-3/8" x 24-3/8" x 3-3/4"	500	.68	.71	1.50	105.37	86.00	508 x 635 x 102
202443	20 x 24 x 4	19-3/8" x 23-3/8" x 3-3/4"	500	.68	.71	1.50	101.05	82.14	508 x 610 x 102
202043	20 x 20 x 4	19-3/8" x 19-3/8" x 3-3/4"	500	.68	.71	1.50	83.76	66.73	508 x 508 x 102
182443	18 x 24 x 4	17-3/8" x 23-3/8" x 3-3/4"	500	.68	.71	1.50	91.31	68.38	457 x 610 x 102
162543	16 x 25 x 4	15-3/8" x 24-3/8" x 3-3/4"	500	.68	.71	1.50	83.79	61.82	406 x 635 x 102
162043	16 x 20 x 4	15-3/8" x 19-3/8" x 3-3/4"	500	.68	.71	1.50	66.60	47.97	406 x 508 x 102
122443	12 x 24 x 4	11-3/8" x 23-3/8" x 3-3/4"	500	.68	.71	1.50	59.65	44.40	305 x 610 x 102
		<u>.</u>	MER	V 13					
242442	24 x 24 x 4	23-3/8" x 23-3/8" x 3-3/4"	500	.60	.63	1.50	118.09	97.68	610 x 610 x 102
*202542	20 x 25 x 4	19-3/8" x 24-3/8" x 3-3/4"	500	.60	.63	1.50	101.56	83.67	508 x 635 x 102
202442	20 x 23 x 4	19-3/8" x 23-3/8" x 3-3/4"	500	.60	.63	1.50	97.40	79.92	508 x 610 x 102
202042	20 x 20 x 4	19-3/8" x 19-3/8" x 3-3/4"	500	.60	.63	1.50	80.73	64.92	508 x 508 x 102
182442	18 x 24 x 4	17-3/8" x 23-3/8" x 3-3/4"	500	.60	.63	1.50	87.66	66.31	457 x 610 x 102
162542	16 x 25 x 4	15-3/8" x 24-3/8" x 3-3/4"	500	.60	.63	1.50	81.25	59.65	406 x 635 x 102
162042	16 x 20 x 4	15-3/8" x 19-3/8" x 3-3/4"	500	.60	.63	1.50	64.58	46.29	406 x 508 x 102
122442	$12 \times 24 \times 4$	11-3/8" x 23-3/8" x 3-3/4"	500	.60	.63	1.50	57.22	43.29	305 x 610 x 102
	. <u> </u>		MER	V 11			<u></u>		
242441	24 x 24 x 4	23-3/8" x 23-3/8" x 3-3/4"	500	.48	.51	1.50	118.09	97.68	610 x 610 x 102
*202541	24 x 24 x 4 20 x 25 x 4	23-3/8" x 23-3/8" x 3-3/4" 19-3/8" x 24-3/8" x 3-3/4"	500	.48	.51	1.50	118.09	97.68 83.67	508 x 635 x 102
202341	20 x 25 x 4 20 x 24 x 4	19-3/8" x 23-3/8" x 3-3/4"	500	.48	.51	1.50	97.40	83.67 79.92	508 x 610 x 102
202441 202041	$20 \times 24 \times 4$ $20 \times 20 \times 4$	19-3/8" x 23-3/8" x 3-3/4" 19-3/8" x 19-3/8" x 3-3/4"	500	.48	.51	1.50	80.73	79.92 64.92	508 x 508 x 102
182441	20 x 20 x 4 18 x 24 x 4	19-3/8" x 19-3/8" x 3-3/4" 17-3/8" x 23-3/8" x 3-3/4"	500	.48	.51	1.50	80.75	66.31	457 x 610 x 102
162541	18 x 24 x 4 16 x 25 x 4	17-3/8" x 23-3/8" x 3-3/4" 15-3/8" x 24-3/8" x 3-3/4"	500	.48	.51	1.50	87.00	59.65	406 x 635 x 102
162041	$16 \times 25 \times 4$ $16 \times 20 \times 4$	15-3/8" x 19-3/8" x 3-3/4"	500	.48	.51	1.50	64.58	46.29	406 x 508 x 102 406 x 508 x 102
122441	$16 \times 20 \times 4$ 12 x 24 x 4	15-3/8" x 19-3/8" x 3-3/4" 11-3/8" x 23-3/8" x 3-3/4"	500	.48	.51	1.50	57.22	46.29 43.29	406 x 508 x 102 305 x 610 x 102
122441		11-3/8" X 23-3/8" X 3-3/4"	500	.40	.31	1.50	57.22	45.29	303 X 010 X 102

Tolerances shall be +/- 1/16" for width and height. Performance values based on ASHRAE and in-house testing methods.

*Model Number Size Configuration may be produced as 20x25 or 25x20.

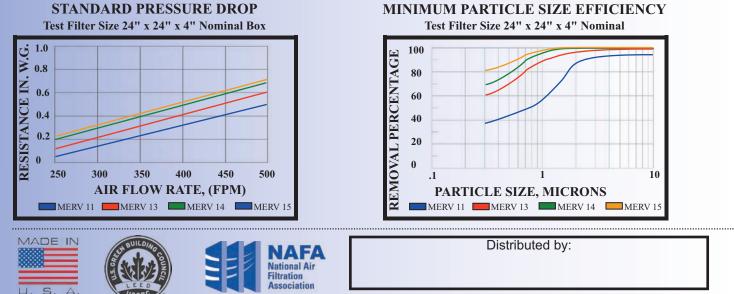



Distributed by:


10

MERV 15


Г

"Serving You With Locations Throughout The Nation"



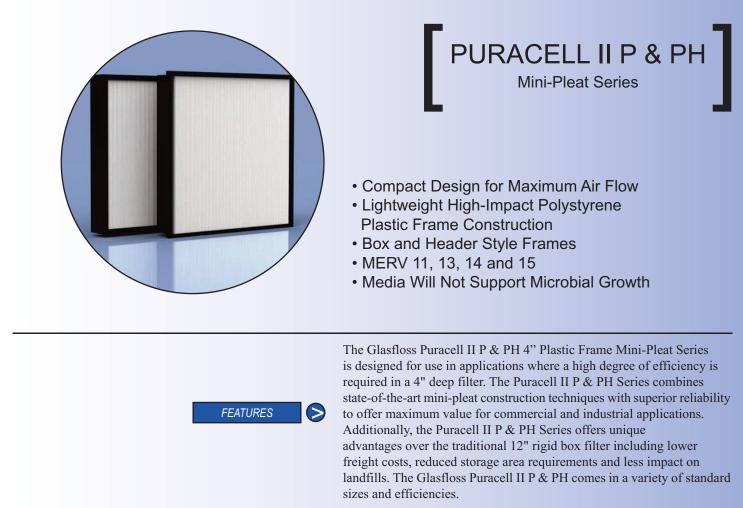

The Glasfloss Puracell II P & PH filter is a mini-pleat cartridge encapsulated with a highimpact polystyrene plastic frame. An optional gasket can be applied to the filter frame. The Puracell II P & PH pack is pleated, wet laid micro fiber media. The pleats are separated and supported by a uniform glue bead that produces a low initial pressure drop while maximizing the filtration area. The media pack is resistant to moisture and does not support the growth of bacteria and mold. The media pack is thoroughly sealed to the inside of the plastic frame to prevent air bypass. The filter shall be rated to withstand temperatures up to 180 degrees Fahrenheit. The recommended final resistance for Puracell II P & PH filters is 1.5" w.g.

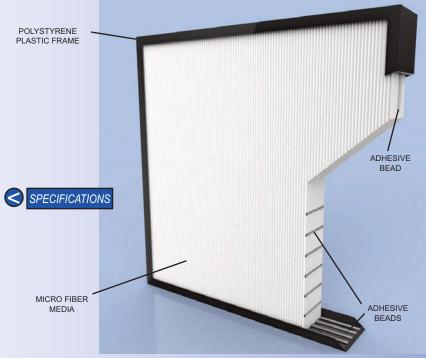


"Serving You With Locations Throughout The Nation"



		PURA	CELL II	P &]	PH SF	ERIES			
BASE	SIZE	SIZE	RATED		TIAL	FINAL		DIA	SIZE
MODEL	W x H x D	W x H x D	VELOCITY	RES	SIST.	RESIST.	SQU	ARE	W x H x D
NUMBER	NOMI-	EXACT	FPM	IN.	W.G.	IN. W.G.	FE	ET	NOMINAL
	NAL			Р	PH		Р	PH	MM
	[[]]		[]			[]			I
			MER	V 15					
242449	24 x 24 x 4	23-3/8" x 23-3/8" x 3-3/4"	500	.66	.77	1.50	122.96	102.12	610 x 610 x 102
*202549	20 x 25 x 4	19-3/8" x 24-3/8" x 3-3/4"	500	.66	.77	1.50	105.37	86.00	508 x 635 x 102
202449	20 x 24 x 4	19-3/8" x 23-3/8" x 3-3/4"	500	.66	.77	1.50	101.05	82.14	508 x 610 x 102
202049	$20 \times 20 \times 4$	19-3/8" x 19-3/8" x 3-3/4"	500	.66	.77	1.50	83.76 91.31	66.73	508 x 508 x 102
182449 162549	18 x 24 x 4 16 x 25 x 4	17-3/8" x 23-3/8" x 3-3/4" 15-3/8" x 24-3/8" x 3-3/4"	500 500	.66 .66	.77 .77	1.50 1.50	83.79	68.38 61.82	457 x 610 x 102 406 x 635 x 102
162049	$16 \times 20 \times 4$ 16 x 20 x 4	15-3/8" x 19-3/8" x 3-3/4"	500	.66	.77	1.50	66.60	47.97	406 x 508 x 102
122449	10 x 20 x 4 12 x 24 x 4	11-3/8" x 23-3/8" x 3-3/4"	500	.66	.77	1.50	59.65	44.40	305 x 610 x 102
			MER	$\overline{\mathbf{W}}$ 1/				I	
0.40.4.40				1	50	1.50	100.06	100.10	(10, (10, 100
242443	24 x 24 x 4	23-3/8" x 23-3/8" x 3-3/4"	500	.61	.72	1.50	122.96	102.12	610 x 610 x 102
*202543	20 x 25 x 4 20 x 24 x 4	19-3/8" x 24-3/8" x 3-3/4" 19-3/8" x 23-3/8" x 3-3/4"	500	.61	.72 .72	1.50 1.50	105.37	86.00	508 x 635 x 102 508 x 610 x 102
202443 202043	20 x 24 x 4 20 x 20 x 4	19-3/8" x 23-3/8" x 3-3/4" 19-3/8" x 19-3/8" x 3-3/4"	500 500	.61 .61	.72 .72	1.50	101.05 83.76	82.14 66.73	508 x 508 x 102
182443	18 x 24 x 4	17-3/8" x 23-3/8" x 3-3/4"	500	.61	.72	1.50	91.31	68.38	457 x 610 x 102
162543	$16 \times 24 \times 4$ $16 \times 25 \times 4$	15-3/8" x 24-3/8" x 3-3/4"	500	.61	.72	1.50	83.79	61.82	406 x 635 x 102
162043	16 x 20 x 4	15-3/8" x 19-3/8" x 3-3/4"	500	.61	.72	1.50	66.60	47.97	406 x 508 x 102
122443	12 x 24 x 4	11-3/8" x 23-3/8" x 3-3/4"	500	.61	.72	1.50	59.65	44.40	305 x 610 x 102
			MER	V 13				,	
242442	24 x 24 x 4	23-3/8" x 23-3/8" x 3-3/4"	500	.53	.64	1.50	118.09	97.68	610 x 610 x 102
*202542	20 x 25 x 4	19-3/8" x 24-3/8" x 3-3/4"	500	.53	.64	1.50	101.56	83.67	508 x 635 x 102
202442	20 x 24 x 4	19-3/8" x 23-3/8" x 3-3/4"	500	.53	.64	1.50	97.40	79.92	508 x 610 x 102
202042	20 x 20 x 4	19-3/8" x 19-3/8" x 3-3/4"	500	.53	.64	1.50	80.73	64.92	508 x 508 x 102
182442	18 x 24 x 4	17-3/8" x 23-3/8" x 3-3/4"	500	.53	.64	1.50	87.66	66.31	457 x 610 x 102
162542	16 x 25 x 4	15-3/8" x 24-3/8" x 3-3/4"	500	.53	.64	1.50	81.25	59.65	406 x 635 x 102
162042	16 x 20 x 4	15-3/8" x 19-3/8" x 3-3/4"	500	.53	.64	1.50	64.58	46.29	406 x 508 x 102
122442	12 x 24 x 4	11-3/8" x 23-3/8" x 3-3/4"	500	.53	.64	1.50	57.22	43.29	305 x 610 x 102
			MER	V 11					
242441	24 x 24 x 4	23-3/8" x 23-3/8" x 3-3/4"	500	.40	.52	1.50	118.09	97.68	610 x 610 x 102
*202541	20 x 25 x 4	19-3/8" x 24-3/8" x 3-3/4"	500	.40	.52	1.50	101.56	83.67	508 x 635 x 102
202441	20 x 24 x 4	19-3/8" x 23-3/8" x 3-3/4"	500	.40	.52	1.50	97.40	79.92	508 x 610 x 102
202041	20 x 20 x 4	19-3/8" x 19-3/8" x 3-3/4"	500	.40	.52	1.50	80.73	64.92	508 x 508 x 102
182441	18 x 24 x 4	17-3/8" x 23-3/8" x 3-3/4"	500	.40	.52	1.50	87.66	66.31	457 x 610 x 102
162541	$16 \times 25 \times 4$	15-3/8" x 24-3/8" x 3-3/4"	500	.40	.52	1.50	81.25	59.65	406 x 635 x 102
162041 122441	16 x 20 x 4	15-3/8" x 19-3/8" x 3-3/4"	500 500	.40 .40	.52 .52	1.50 1.50	64.58	46.29	406 x 508 x 102
122441	12 x 24 x 4	11-3/8" x 23-3/8" x 3-3/4"	500	.40	.32	1.50	57.22	43.29	305 x 610 x 102

Tolerances shall be +/- 1/16" for width and height. Performance values based on ASHRAE and in-house testing methods.

*Model Number Size Configuration may be produced as 20x25 or 25x20.

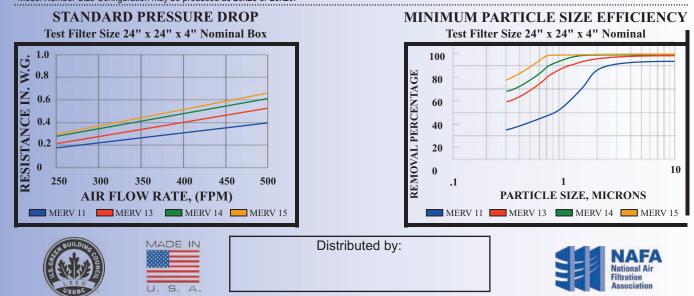

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

www.glasfloss.com · (214) 741-7056






PURACELL II-S Mini-Pleat Synthetic Media Series

- 100% Synthetic Media
- Compact Design for Maximum Air Flow
- Standard and Special Sizes
- MERV 11, 13 and 15
- Media Will Not Support Microbial Growth



The Glasfloss Puracell II-S Synthetic Mini-Pleat Series filters are designed for use in applications where a high degree of efficiency is required in a 4" filter. The Puracell II-S Series combines state-of-the-art mini-pleat construction techniques with superior reliability to offer maximum value for commercial and industrial applications. Additionally, the Puracell II-S offers unique advantages over the traditional 12" rigid box filter including lower freight costs, reduced storage area requirements and less impact on landfills. The Glasfloss Puracell II-S comes in a variety of sizes and performances.

The Glasfloss Puracell II-S filter is a mini-pleat cartridge encapsulated between two heavy-duty beverage board die-cut frames. The die-cut frames are bonded together, creating a double-wall thickness around the perimeter of the filter. The Puracell II-S pack is a pleated 100% synthetic fiber media. The pleats are separated and supported by a uniform glue bead that produces a low initial pressure drop while maximizing the filtration area. The media pack is resistant to moisture and does not support the growth of bacteria and mold. The media pack is thoroughly bonded to the interior of the die-cut frame. The filter shall be rated to withstand temperatures up to 180 degrees Fahrenheit. The recommended final resistance for Puracell II-S filters is 1.5" w.g.

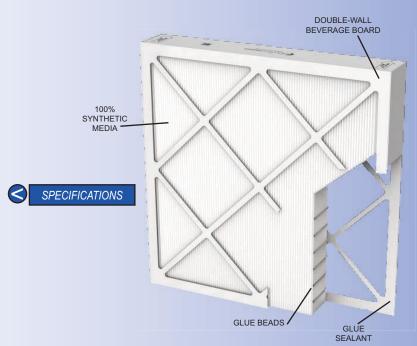


"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com • (214) 741-7056 PRODUCT BULLETIN 11PURIIS • SECTION 11 • 3-10-20


PURACELL II-S SYNTHETIC MEDIA SERIES

MODEL NUMBER	SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	INITIAL RESIST. IN. W.G.	FINAL RESIST. IN. W.G.	MEDIA SQUARE FEET	SIZE W x H x D NOMINAL MM	
	[]	<u>[</u>]	MER	V 15	[]	[]		
PURIIS2424495	24 x 24 x 4	23-3/8" x 23-3/8" x 3-3/4"	500	.48	1.50	84.28	610 x 610 x 102	
PURIIS2025495	20 x 25 x 4	19-1/2" x 24-1/2" x 3-3/4"	500	.48	1.50	74.14	508 x 635 x 102	
PURIIS2024495	20 x 24 x 4	19-3/8" x 23-3/8" x 3-3/4"	500	.48	1.50	70.23	508 x 610 x 102	
PURIIS2020495	20 x 20 x 4	19-1/2" x 19-1/2" x 3-3/4"	500	.48	1.50	58.53	508 x 508 x 102	
PURIIS1824495	18 x 24 x 4	17-1/2" x 23-1/2" x 3-3/4"	500	.48	1.50	62.98	457 x 610 x 102	
PURIIS1625495	16 x 25 x 4	15-1/2" x 24-1/2" x 3-3/4"	500	.48	1.50	58.83	406 x 635 x 102	
PURIIS1620495	16 x 20 x 4	15-1/2" x 19-1/2" x 3-3/4"	500	.48	1.50	46.45	406 x 508 x 102	
PURIIS1224495	12 x 24 x 4	11-3/8" x 23-3/8" x 3-3/4"	500	.48	1.50	40.97	305 x 610 x 102	
	MERV 13							
PURIIS242448	24 x 24 x 4	23-3/8" x 23-3/8" x 3-3/4"	500	.46	1.50	84.28	610 x 610 x 102	
PURIIS202548	20 x 25 x 4	19-1/2" x 24-1/2" x 3-3/4"	500	.46	1.50	74.14	508 x 635 x 102	
PURIIS202448	20 x 24 x 4	19-3/8" x 23-3/8" x 3-3/4"	500	.46	1.50	70.23	508 x 610 x 102	
PURIIS202048	20 x 20 x 4	19-1/2" x 19-1/2" x 3-3/4"	500	.46	1.50	58.53	508 x 508 x 102	
PURIIS182448	18 x 24 x 4	17-1/2" x 23-1/2" x 3-3/4"	500	.46	1.50	62.98	457 x 610 x 102	
PURIIS162548	16 x 25 x 4	15-1/2" x 24-1/2" x 3-3/4"	500	.46	1.50	58.83	406 x 635 x 102	
PURIIS162048	16 x 20 x 4	15-1/2" x 19-1/2" x 3-3/4"	500	.46	1.50	46.45	406 x 508 x 102	
PURIIS122448	12 x 24 x 4	11-3/8" x 23-3/8" x 3-3/4"	500	.46	1.50	40.97	305 x 610 x 102	
			MER	V 11				
PURIIS242446	24 x 24 x 4	23-3/8" x 23-3/8" x 3-3/4"	500	.44	1.50	84.28	610 x 610 x 102	
PURIIS202546	20 x 25 x 4	19-1/2" x 24-1/2" x 3-3/4"	500	.44	1.50	74.14	508 x 635 x 102	
PURIIS202446	20 x 24 x 4	19-3/8" x 23-3/8" x 3-3/4"	500	.44	1.50	70.23	508 x 610 x 102	
PURIIS202046	20 x 20 x 4	19-1/2" x 19-1/2" x 3-3/4"	500	.44	1.50	58.53	508 x 508 x 102	
PURIIS182446	18 x 24 x 4	17-1/2" x 23-1/2" x 3-3/4"	500	.44	1.50	62.98	457 x 610 x 102	
PURIIS162546	16 x 25 x 4	15-1/2" x 24-1/2" x 3-3/4"	500	.44	1.50	58.83	406 x 635 x 102	
PURIIS162046	16 x 20 x 4	15-1/2" x 19-1/2" x 3-3/4"	500	.44	1.50	46.45	406 x 508 x 102	
PURIIS122446	12 x 24 x 4	11-3/8" x 23-3/8" x 3-3/4"	500	.44	1.50	40.97	305 x 610 x 102	

Tolerances shall be +/- 1/8" for height, width and +/- 1/16" for depth. Performance values based on ASHRAE and in-house testing methods.








MINIMUM PARTICLE SIZE EFFICIENCY Test Filter Size 24" x 24" x 4" Nominal

MADE IN AFA **National Air** Filtration Association

Distributed by:

"Serving You With Locations Throughout The Nation"




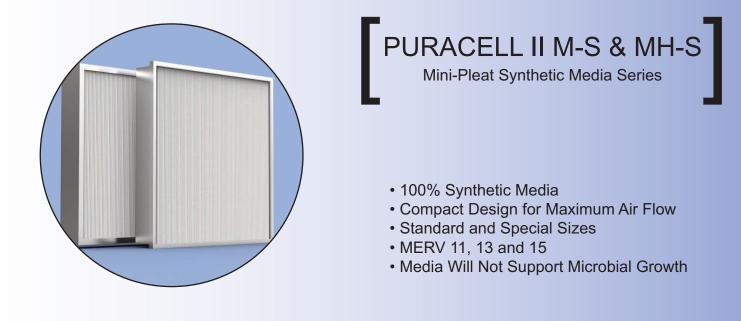



The Glasfloss Puracell II M-S & MH-S Mini-Pleat Series filters are designed for use in applications where a high degree of efficiency is required in a 4" filter. The Puracell II M-S & MH-S Series combines state-of-the-art mini-pleat construction techniques with superior reliability to offer maximum value for commercial and industrial applications. Additionally, the Puracell II M-S & MH-S filters offer unique advantages over the traditional 12" rigid box filter including lower freight costs, reduced storage area requirements and less impact on landfills. The Glasfloss Puracell II M-S & MH-S filters come in a variety of sizes and performances.

The Glasfloss Puracell II M-S & MH-S filter is a mini-pleat cartridge encapsulated with a heavyduty 26 gauge galvanized metal frame. An optional gasket can be applied to the filter frame. The galvanized metal frame is riveted together to form a rigid frame. The Puracell II M-S & MH-S pack is a pleated 100% synthetic fiber media. The pleats are separated and supported by a uniform glue bead that produces a low initial pressure drop while maximizing the filtration area. The media pack is resistant to moisture and does not support the growth of bacteria and mold. The media pack is thoroughly sealed to the inside of the metal frame to prevent air bypass. A metal face guard shall be secured on the air leaving side. The filter shall be rated to withstand temperatures up to 180 degrees Fahrenheit. The recommended final resistance for Puracell II M-S & MH-S filters is 1.5" w.g.

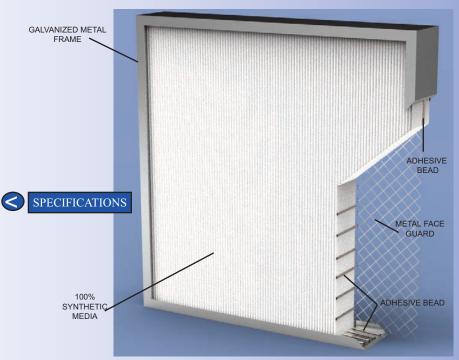

"Serving You With Locations Throughout The Nation"


Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com (214) 741-7056 PRODUCT BULLETIN 11PURMSAMHS • SECTION 11 • 3-10-20



BASE MODEL NUMBER	SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	RE	FIAL SIST. W.G.	FINAL RESIST. IN. W.G.	🛛 squ	DIA JARE CET	SIZE W x H x D NOMINAL
				M-S	MH-S		M-S	MH-S	MM
			MER	V 15	·,				
242449	24 x 24 x 4	23-3/8" x 23-3/8" x 3-3/4"	500	.47	.55	1.50	75.56	64.05	610 x 610 x 102
202549	20 x 25 x 4	19-3/8" x 24-3/8" x 3-3/4"	500	.47	.55	1.50	65.17	54.51	508 x 635 x 102
202449	20 x 24 x 4	19-3/8" x 23-3/8" x 3-3/4"	500	.47	.55	1.50	62.97	52.41	508 x 610 x 102
202049	20 x 20 x 4	19-3/8" x 19-3/8" x 3-3/4"	500	.47	.55	1.50	52.14	42.66	508 x 508 x 102
182449	18 x 24 x 4	17-3/8" x 23-3/8" x 3-3/4"	500	.47	.55	1.50	55.62	46.58	457 x 610 x 102
162549	16 x 25 x 4	15-3/8" x 24-3/8" x 3-3/4"	500	.47	.55	1.50	51.63	42.05	406 x 635 x 102
162049	16 x 20 x 4	15-3/8" x 19-3/8" x 3-3/4"	500	.47	.55	1.50	41.30	32.91	406 x 508 x 102
122449	12 x 24 x 4	11-3/8" x 23-3/8" x 3-3/4"	500	.47	.55	1.50	36.73	28.14	305 x 610 x 102
	MERV 13								
242442	24 x 24 x 4	23-3/8" x 23-3/8" x 3-3/4"	500	.45	.53	1.50	75.56	64.05	610 x 610 x 102
202542	20 x 25 x 4	19-3/8" x 24-3/8" x 3-3/4"	500	.45	.53	1.50	65.17	54.51	508 x 635 x 102
202442	20 x 24 x 4	19-3/8" x 23-3/8" x 3-3/4"	500	.45	.53	1.50	62.97	52.41	508 x 610 x 102
202042	20 x 20 x 4	19-3/8" x 19-3/8" x 3-3/4"	500	.45	.53	1.50	52.14	42.66	508 x 508 x 102
182442	18 x 24 x 4	17-3/8" x 23-3/8" x 3-3/4"	500	.45	.53	1.50	55.62	46.58	457 x 610 x 102
162542	16 x 25 x 4	15-3/8" x 24-3/8" x 3-3/4"	500	.45	.53	1.50	51.63	42.05	406 x 635 x 102
162042	16 x 20 x 4	15-3/8" x 19-3/8" x 3-3/4"	500	.45	.53	1.50	41.30	32.91	406 x 508 x 102
122442	12 x 24 x 4	11-3/8" x 23-3/8" x 3-3/4"	500	.45	.53	1.50	36.73	28.14	305 x 610 x 102
			MER	V 11					
242441	24 x 24 x 4	23-3/8" x 23-3/8" x 3-3/4"	500	.43	.51	1.50	75.56	64.05	610 x 610 x 102
202541	20 x 25 x 4	19-3/8" x 24-3/8" x 3-3/4"	500	.43	.51	1.50	65.17	54.51	508 x 635 x 102
202441	20 x 24 x 4	19-3/8" x 23-3/8" x 3-3/4"	500	.43	.51	1.50	62.97	52.41	508 x 610 x 102
202041	20 x 20 x 4	19-3/8" x 19-3/8" x 3-3/4"	500	.43	.51	1.50	52.14	42.66	508 x 508 x 102
182441	18 x 24 x 4	17-3/8" x 23-3/8" x 3-3/4"	500	.43	.51	1.50	55.62	46.58	457 x 610 x 102
162541	16 x 25 x 4	15-3/8" x 24-3/8" x 3-3/4"	500	.43	.51	1.50	51.63	42.05	406 x 635 x 102
162041	16 x 20 x 4	15-3/8" x 19-3/8" x 3-3/4"	500	.43	.51	1.50	41.30	32.91	406 x 508 x 102
122441	12 x 24 x 4	11-3/8" x 23-3/8" x 3-3/4"	500	.43	.51	1.50	36.73	28.14	305 x 610 x 102


PURACELL II M-S & MH-S SYNTHETIC MEDIA SERIES

Tolerances shall be +/- 1/16" for width and height. Performance values based on ASHRAE and in-house testing methods.

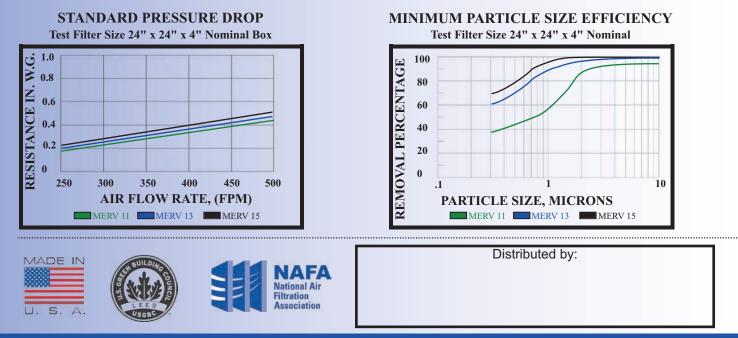


"Serving You With Locations Throughout The Nation"



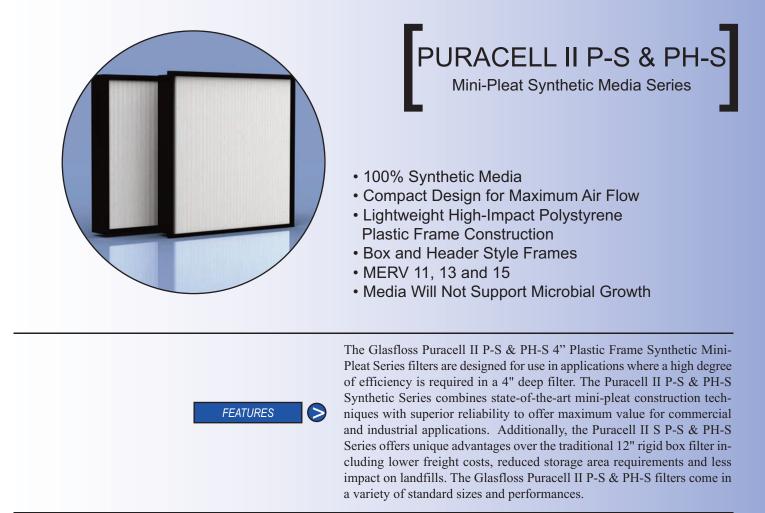

The Glasfloss Puracell II P-S & PH-S synthetic filter is a mini-pleat cartridge encapsulated with a high impact polystyrene plastic frame. An optional gasket can be applied to the filter frame. The Puracell II P-S & PH-S pack is a pleated 100% synthetic fiber media. The pleats are separated and supported by a uniform glue bead that produces a low initial pressure drop while maximizing the filtration area. The media pack is resistant to moisture and does not support the SPECIFICATIONS growth of bacteria and mold. The media pack is thoroughly sealed to the inside of the plastic frame to prevent air bypass. The filter shall be rated to withstand temperatures up to 180 degrees Fahrenheit. The recommended final resistance for Puracell II P-S & PH-S synthetic filters is 1.5" w.g.

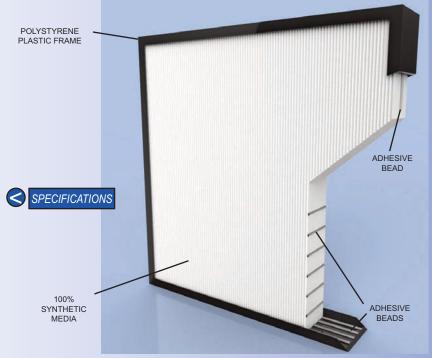

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com • (214) 741-7056 PRODUCT BULLETIN 11PURPS&PHS • SECTION 11 • 3-10-20


Gasfloss

THE CLEAR CHOICE SINCE 1936

BASE	SIZE	SIZE	RATED	INI	ΓIAL	FINAL	ME	DIA	SIZE
MODEL	WxHxD	WxHxD	VELOCITY	RES	SIST.	RESIST.	SOI	JARE	WxHxD
NUMBER									
NUMBER		EXACT	FPM		W.G.	IN. W.G.		EET	NOMINAL
	NAL			P-S	PH-S		P-S	PH-S	MM
,	. <u> </u>		MER	V 15				·	
2/2//0	24 24 4	22.2/01 22.2/01 2.2/41			54	1.50		64.05	(10 (10 100
242449	24 x 24 x 4	23-3/8" x 23-3/8" x 3-3/4"	500	.46	.54	1.50	75.56	64.05	610 x 610 x 102
202549	20 x 25 x 4	19-3/8" x 24-3/8" x 3-3/4"	500	.46	.54	1.50	65.17	54.51	508 x 635 x 102
202449	20 x 24 x 4	19-3/8" x 23-3/8" x 3-3/4"	500	.46 .46	.54	1.50	62.97 52.14	52.41	508 x 610 x 102
202049	20 x 20 x 4	19-3/8" x 19-3/8" x 3-3/4" 17-3/8" x 23-3/8" x 3-3/4"	500		.54	1.50		42.66	508 x 508 x 102
182449 162549	18 x 24 x 4	1/-3/8" x 23-3/8" x 3-3/4" 15-3/8" x 24-3/8" x 3-3/4"	500 500	.46 .46	.54 .54	1.50	55.62 51.63	46.58	457 x 610 x 102
162549	16 x 25 x 4 16 x 20 x 4	15-3/8" x 24-3/8" x 3-3/4" 15-3/8" x 19-3/8" x 3-3/4"	500	.46	.54 .54	1.50 1.50	41.30	42.05 32.91	406 x 635 x 102 406 x 508 x 102
122449	12 x 24 x 4	11-3/8" x 23-3/8" x 3-3/4"	500	.46	.54	1.50	36.73	28.14	305 x 610 x 102
				X7 12					
			MER	V 15					
242442	24 x 24 x 4	23-3/8" x 23-3/8" x 3-3/4"	500	44	.52	1.50	75.56	64.05	610 x 610 x 102
202542	20 x 25 x 4	19-3/8" x 24-3/8" x 3-3/4"	500	.44	.52	1.50	65.17	54.51	508 x 635 x 102
202442	20 x 24 x 4	19-3/8" x 23-3/8" x 3-3/4"	500	.44	.52	1.50	62.97	52.41	508 x 610 x 102
202042	20 x 20 x 4	19-3/8" x 19-3/8" x 3-3/4"	500	.44	.52	1.50	52.14	42.66	508 x 508 x 102
182442	18 x 24 x 4	17-3/8" x 23-3/8" x 3-3/4"	500	.44	.52	1.50	55.62	46.58	457 x 610 x 102
162542	16 x 25 x 4	15-3/8" x 24-3/8" x 3-3/4"	500	.44	.52	1.50	51.63	42.05	406 x 635 x 102
162042	16 x 20 x 4	15-3/8" x 19-3/8" x 3-3/4"	500	.44	.52	1.50	41.30	32.91	406 x 508 x 102
122442	12 x 24 x 4	11-3/8" x 23-3/8" x 3-3/4"	500	.44	.52	1.50	36.73	28.14	305 x 610 x 102
			MER	V 11					
								c1.0-	(10 (10 10)
242441	24 x 24 x 4	23-3/8" x 23-3/8" x 3-3/4"	500	.42	.50	1.50	75.56	64.05	610 x 610 x 102
202541	20 x 25 x 4	19-3/8" x 24-3/8" x 3-3/4"	500	.42	.50	1.50	65.17	54.51	508 x 635 x 102
202441	20 x 24 x 4	19-3/8" x 23-3/8" x 3-3/4"	500	.42	.50	1.50	62.97	52.41	508 x 610 x 102
202041	20 x 20 x 4	19-3/8" x 19-3/8" x 3-3/4"	500	.42	.50	1.50	52.14	42.66	508 x 508 x 102
182441	18 x 24 x 4	17-3/8" x 23-3/8" x 3-3/4"	500	.42	.50	1.50	55.62	46.58	457 x 610 x 102
162541	16 x 25 x 4	15-3/8" x 24-3/8" x 3-3/4"	500	.42	.50	1.50	51.63	42.05	406 x 635 x 102
162041	16 x 20 x 4	15-3/8" x 19-3/8" x 3-3/4"	500	.42	.50	1.50	41.30	32.91	406 x 508 x 102
122441	12 x 24 x 4	11-3/8" x 23-3/8" x 3-3/4"	500	.42	.50	1.50	36.73	28.14	305 x 610 x 102

PURACELL II P-S & PH-S SYNTHETIC MEDIA SERIES

Tolerances shall be +/- 1/16" for width and height. Performance values based on ASHRAE and in-house testing methods.

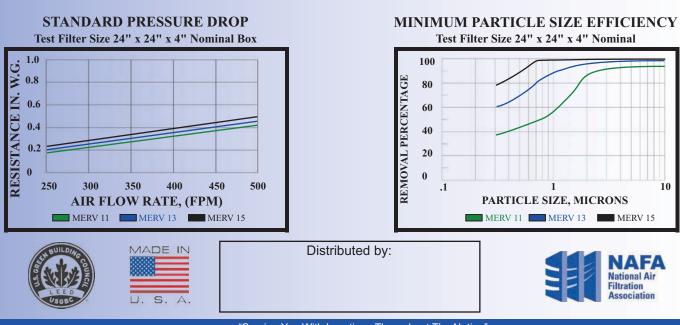


"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

www.glasfloss.com · (214) 741-7056




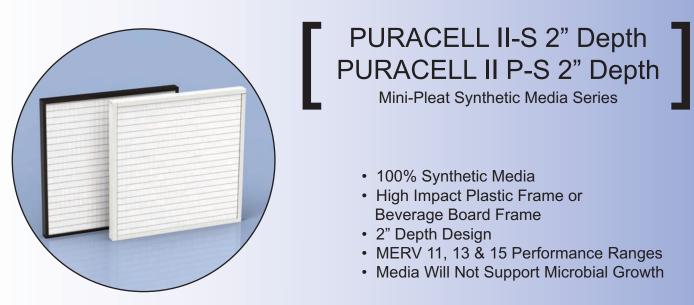



The Glasfloss Puracell II-S and Puracell II P-S 2" depth plastic frame and beverage board frame mini-pleat series are designed for use in a variety of applications where high performance is required. The Puracell II-S 2" depth mini-pleat series is offered in 100% synthetic fibers and combines superior reliability to offer maximum value for commercial and industrial applications. The Puracell II-S 2" depth mini-pleat series offers advantages over 4" and 6" depths filters including lower freight costs, reduced storage area and less impact in landfills. The Puracell II-S 2" depth mini pleat series comes in a variety of standard sizes and performance ranges.

The Glasfloss Puracell II-S 2" depth filter is a minipleat cartridge produced in heavy-duty beverage board frame or high impact polystyrene plastic frame. The Puracell II-S 2" pack is a pleated 100% synthetic fiber media. The pleats are separated and supported by a uniform glue bead that produces a low initial pressure drop while maximizing the filtration area. The media pack is resistant to moisture and does not support the growth of bacteria and mold. The media pack is thoroughly bonded to the interior of the plastic or beverage board framework. The filter shall be rated to withstand temperatures up to 180 degrees Fahrenheit. The recommended final resistance for Puracell II-S filters is 1.5" w.g.

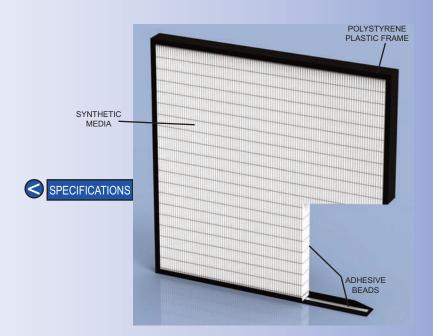

"Serving You With Locations Throughout The Nation"


Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com • (214) 741-7056 PRODUCT BULLETIN 11PURIL-S 2" • SECTION 11 • 7-1-21




PURACELL II-S SYNTHETIC MEDIA SERIES

BASE MODEL NUMBER	SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	INITIAL RESIST. IN. W.G.	FINAL RESIST. IN. W.G.	MEDIA SQUARE FEET	SIZE W x H x D NOMINAL MM			
	MERV 15									
2424295 2025295 2024295 2020295 1824295 1625295	24 x 24 x 2 20 x 25 x 2 20 x 24 x 2 20 x 20 x 2 18 x 24 x 2 16 x 25 x 2 16 x 25 x 2	23-3/8" x 23-3/8" x 1-3/4" 19-3/8" x 24-3/8" x 1-3/4" 19-3/8" x 23-3/8" x 1-3/4" 19-3/8" x 19-3/8" x 1-3/4" 17-3/8" x 23-3/8" x 1-3/4" 15-3/8" x 24-3/8" x 1-3/4" 15-3/8" x 19-3/8" x 1-3/4"	500 500 500 500 500 500	.55 .55 .55 .55 .55 .55 .55	1.50 1.50 1.50 1.50 1.50 1.50	45.41 39.30 45.41 31.60 33.82 31.24 25.12	610 x 610 x 51 508 x 635 x 51 508 x 610 x 51 508 x 508 x 51 457 x 610 x 51 406 x 635 x 51 406 x 508 x 51			
1620295 1224295	16 x 20 x 2 12 x 24 x 2	15-3/8" x 19-3/8" x 1-3/4" 11-3/8" x 23-3/8" x 1-3/4"	500 500 MER	.55 .55 V 13	1.50 1.50	25.12 22.22	406 x 508 x 51 305 x 610 x 51			
242428 202528 202428 202028 182428 162528 162028 122428	$\begin{array}{c} 24 x 24 x 2 \\ 20 x 25 x 2 \\ 20 x 25 x 2 \\ 20 x 24 x 2 \\ 20 x 20 x 2 \\ 18 x 24 x 2 \\ 16 x 25 x 2 \\ 16 x 20 x 2 \\ 12 x 24 x 2 \end{array}$	23-3/8" x 23-3/8" x 1-3/4" 19-3/8" x 24-3/8" x 1-3/4" 19-3/8" x 23-3/8" x 1-3/4" 19-3/8" x 19-3/8" x 1-3/4" 17-3/8" x 23-3/8" x 1-3/4" 15-3/8" x 24-3/8" x 1-3/4" 15-3/8" x 19-3/8" x 1-3/4"	500 500 500 500 500 500 500 500	.52 .52 .52 .52 .52 .52 .52 .52 .52	$ \begin{array}{c} 1.50\\ 1.50$	45.41 39.30 45.41 31.60 33.82 31.24 25.12 22.22	610 x 610 x 51 508 x 635 x 51 508 x 610 x 51 508 x 508 x 51 457 x 610 x 51 406 x 635 x 51 406 x 508 x 51 305 x 610 x 51			
			MER	X 11						
242426 202526 202426 202026 182426 162526 162026 122426	$\begin{array}{c} 24 x 24 x 2 \\ 20 x 25 x 2 \\ 20 x 25 x 2 \\ 20 x 24 x 2 \\ 20 x 20 x 2 \\ 18 x 24 x 2 \\ 16 x 25 x 2 \\ 16 x 20 x 2 \\ 12 x 24 x 2 \end{array}$	23-3/8" x 23-3/8" x 1-3/4" 19-3/8" x 24-3/8" x 1-3/4" 19-3/8" x 23-3/8" x 1-3/4" 19-3/8" x 19-3/8" x 1-3/4" 17-3/8" x 23-3/8" x 1-3/4" 15-3/8" x 24-3/8" x 1-3/4" 15-3/8" x 19-3/8" x 1-3/4"	500 500 500 500 500 500 500 500	.49 .49 .49 .49 .49 .49 .49 .49 .49	$ \begin{array}{r} 1.50\\ 1.50$	45.41 39.30 45.41 31.60 33.82 31.24 25.12 22.22	610 x 610 x 51 508 x 635 x 51 508 x 610 x 51 508 x 508 x 51 457 x 610 x 51 406 x 635 x 51 406 x 508 x 51 305 x 610 x 51			

Tolerances shall be +/- 1/8" for height, width and +/- 1/16" for depth. Performance values based on ASHRAE and in-house testing methods.



MADE IN




Distributed by:

MINIMUM PARTICLE SIZE EFFICIENCY Test Filter Size 24" x 24" x 2" Nominal

"Serving You With Locations Throughout The Nation"

NAFA National Air Filtration Association





PURACELL V & VX Mini-Pleat Series

- V Series Features 8-Pack Construction
- VX Series Features 4-Pack Construction
- Compact Design For Maximum Air Flow
- High Efficiency Microfiber
- Low Resistance = Energy Savings
- Moisture Resistant Construction



The unique design of the Glasfloss Puracell V & VX Mini-Pleat filter offers high efficiency particulate removal, extended service life and extremely low resistance to air flow. The combination of these key features offers higher performance and lower operating costs than traditional rigid cell and box style filters. The Puracell V & VX Series is available in box or header style, in MERV 11, MERV 13, MERV 14 and MERV 15 efficiencies. The Puracell V Series is also available in MERV 16 and 99.97% HEPA Grade efficiencies.

The Puracell V & VX shall utilize multiple mini-pleat media packs which allow low resistance to air flow and long service life. The media shall be water resistant, inorganic, wet laid glass microfiber. The Puracell V & VX media packs are constructed by pleating a continuous sheet of media. The pleats are separated by a uniform glue bead that produces low pressure drop while maximizing the filtration area. The media packs are resistant to moisture and do not support the growth of bacteria and mold. The media packs are completely sealed and bonded within the heavy-duty 26 gauge S galvanized steel frame. An optional peripheral header design is available. The air entering side of the Puracell V & VX filter frame shall incorporate four holes to insert spring clips from a holding frame device. The filters shall be rated to withstand temperatures up to 180 degrees Fahrenheit. Recommended final resistance for Puracell V is 2.0", and for VX filters is 1.5" w.g.

Efficiency	60-65%	80-85%	90-95%	98%	-	99.97%
MERV	11	13	14	15	16	-

SPECIFICATIONS



"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com • (214) 741-7056 PRODUCT BULLETIN 12 PURV • SECTION 12 • 11-1-15



Puracell V/VX

BASE MODEL NUMBER	SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	IN. W.G		MEDIA SQUARE FEET		SIZE W x H x D NOM. MM
				V	VX	V	VX	
		М	ERV 11 - 60-	65% EFFIC	CIENCY			
2424B1	24 x 24 x 12	23-3/8" x 23-3/8" x 11-1/2"	500	.23	.36	211.23	113.00	610 x 610 x 305
2024B1	20 x 24 x 12	19-3/8" x 23-3/8" x 11-1/2"	500	.23	.36	158.42	84.75	508 x 610 x 305
2020B1	20 x 20 x 12	19-3/8" x 19-3/8" x 11-1/2"	500	.23	.36	131.88	70.55	508 x 508 x 305
1824B1	18 x 24 x 12	17-3/8" x 23-3/8" x 11-1/2"	500	.23	.36	158.42	84.75	457 x 610 x 305
1224B1	12 x 24 x 12	11-3/8" x 23-3/8" x 11-1/2"	500	.23	.36	105.61	56.50	305 x 610 x 305
		М	ERV 13 - 80-	85% EFFIC	CIENCY			
2424B2	24 x 24 x 12	23-3/8" x 23-3/8" x 11-1/2"	500	.26	.40	211.23	113.00	610 x 610 x 305
2024B2	20 x 24 x 12	19-3/8" x 23-3/8" x 11-1/2"	500	.26	.40	158.42	84.75	508 x 610 x 305
2020B2	20 x 20 x 12	19-3/8" x 19-3/8" x 11-1/2"	500	.26	.40	131.88	70.55	508 x 508 x 305
1824B2	18 x 24 x 12	17-3/8" x 23-3/8" x 11-1/2"	500	.26	.40	158.42	84.75	457 x 610 x 305
1224B2	12 x 24 x 12	11-3/8" x 23-3/8" x 11-1/2"	500	.26	.40	105.61	56.50	305 x 610 x 305
		Μ	ERV 14 - 90-	95% EFFIC	TENCY			
2424B3	24 x 24 x 12	23-3/8" x 23-3/8" x 11-1/2"	500	.30	.45	211.23	113.00	610 x 610 x 305
2024B3	20 x 24 x 12	19-3/8" x 23-3/8" x 11-1/2"	500	.30	.45	158.42	84.75	508 x 610 x 305
2020B3	20 x 20 x 12	19-3/8" x 19-3/8" x 11-1/2"	500	.30	.45	131.88	70.55	508 x 508 x 305
1824B3	18 x 24 x 12	17-3/8" x 23-3/8" x 11-1/2"	500	.30	.45	158.42	84.75	457 x 610 x 305
1224B3	12 x 24 x 12	11-3/8" x 23-3/8" x 11-1/2"	500	.30	.45	105.61	56.50	305 x 610 x 305
		l	MERV 15 - 98	8% EFFICE	ENCY			
2424B9	24 x 24 x 12	23-3/8" x 23-3/8" x 11-1/2"	500	.32	.47	211.23	113.00	610 x 610 x 305
2024B9	20 x 24 x 12	19-3/8" x 23-3/8" x 11-1/2"	500	.32	.47	158.42	84.75	508 x 610 x 305
2020B9	20 x 20 x 12	19-3/8" x 19-3/8" x 11-1/2"	500	.32	.47	131.88	70.55	508 x 508 x 305
1824B9	18 x 24 x 12	17-3/8" x 23-3/8" x 11-1/2"	500	.32	.47	158.42	84.75	457 x 610 x 305
1224B9	12 x 24 x 12	11-3/8" x 23-3/8" x 11-1/2"	500	.32	.47	105.61	56.50	305 x 610 x 305
			MERV 16 - 9	5% @ .3 m	icrons			·
* 23F23FB4	24 x 24 x 12	23-3/8" x 23-3/8" x 11-1/2"	500	.45	-	211.23	-	610 x 610 x 305
* 19F23FB4	20 x 24 x 12	19-3/8" x 23-3/8" x 11-1/2"	500	.45	-	158.42	-	508 x 610 x 305
* 19F19FB4	20 x 20 x 12	19-3/8" x 19-3/8" x 11-1/2"	500	.45	-	131.88	-	508 x 508 x 305
* 17F23FB4	18 x 24 x 12	17-3/8" x 23-3/8" x 11-1/2"	500	.45	-	158.42	-	457 x 610 x 305
* 11F23FB4	12 x 24 x 12	11-3/8" x 23-3/8" x 11-1/2"	500	.45	-	105.61	-	305 x 610 x 305
			99.97% (a) .3 micror	1S			
* 23F23FB5	24 x 24 x 12	23-3/8" x 23-3/8" x 11-1/2"	275	.95	-	211.23	-	610 x 610 x 305
* 19F23FB5	20 x 24 x 12	19-3/8" x 23-3/8" x 11-1/2"	275	.95	-	158.42	-	508 x 610 x 305
* 19F19FB5	20 x 20 x 12	19-3/8" x 19-3/8" x 11-1/2"	275	.95	-	131.88	-	508 x 508 x 305
* 17F23FB5	18 x 24 x 12	17-3/8" x 23-3/8" x 11-1/2"	275	.95	-	158.42	-	457 x 610 x 305
* 11F23FB5	12 x 24 x 12	11-3/8" x 23-3/8" x 11-1/2"	275	.95	-	105.61	-	305 x 610 x 305


Tolerances shall be +/- 1/16" for height, width and depth. The frame depth shall not exceed 11-1/2". Performance values based on ASHRAE and in-house testing methods. Recommended final resistance: V=2.0", VX=1.5"

Recommended final resistance: V=2.0", VX=1.5"

* These models are available in both full and exact sizes.

"Serving You With Locations Throughout The Nation"



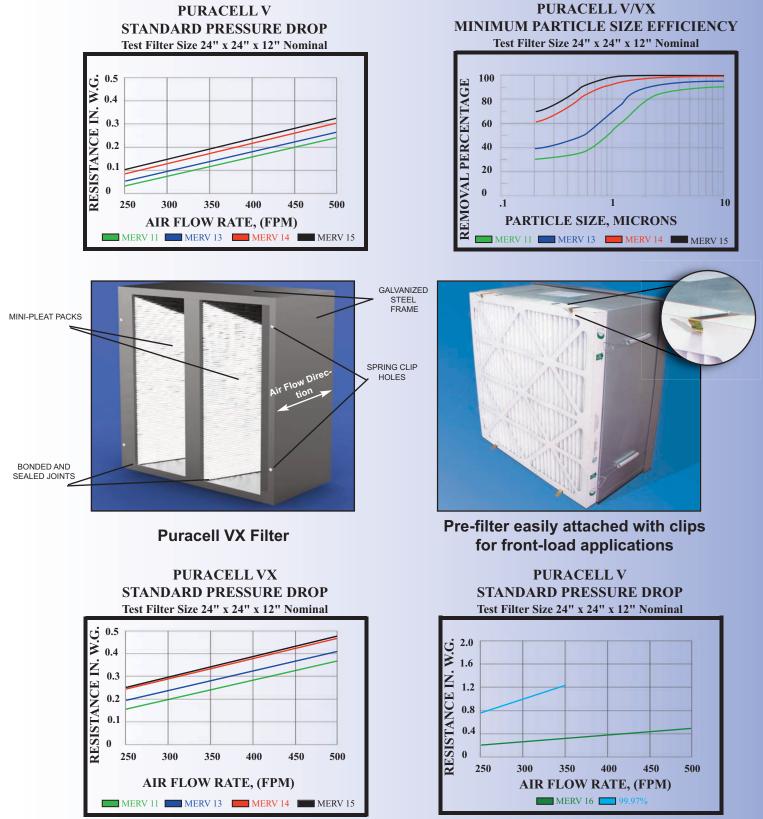

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications with out notice.

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

www.glasfloss.com · (214) 741-7056



Energy Saving	Energy Savings & Environmental Impact Comparison								
	Traditional Rigid Cell								
MERV Rating	14	14							
Initial Resistance (in. w.g)	0.30	0.68							
*Recommended Final Resistance (in. w.g.)	2.0	1.5							
**Fan/Motor/Drive Efficiency (%)	58.00%	58.00%							
***Energy Consumption (kWh)	2613	3876							
Annual CO2 Emissions (lbs)	3533	5240							
Annual Energy Cost (\$.08/kWh)	\$209.00	\$310.00							


* V pressure drop estimated at 1.17 in. w.g. after 12 months

** Fan/Motor/Drive Efficiency estimated & averaged at 58%

*** Kilowatt cost estimated at \$.08/kWh

Glasfloss Puracell V = \$101.00 energy savings per filter or annually 32.6% savings per this comparison.

PART NUMBER CONFIGURATION FOR V & VX

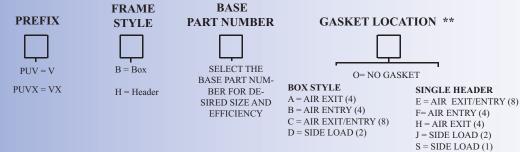

To ensure that Puracell V and VX filters are fabricated to meet job requirements, order by the exact Part Number. Example: 24 x 24 x 12 MERV 14, Puracell VX, Box Style, no gasket. Part number = "PUVXB2424B3O".




"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

www.glasfloss.com · (214) 741-7056

Glasfloss

THE CLEAR CHOICE SINCE 1936

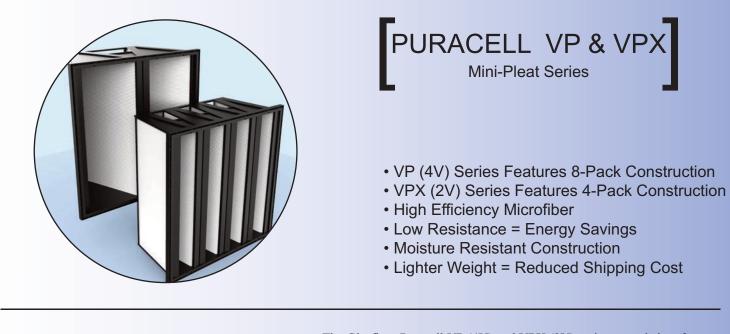


FEATURES

The Glasfloss Puracell VP (4V) and VPX (2V) series extended surface mini-pleat filters offer high efficiency particulate removal, extended service life and extremely low resistance to air flow. The Puracell VP (4V) and VPX (2V) frame filters incorporate lightweight, high-impact polystyrene framework for strength and durability in demanding commercial and industrial applications. When compared to traditional rigid cell and traditional box style filters, the Puracell VP (4V) and VPX (2V) minipleat series offer superior performance, lower operating costs and significant energy savings. Puracell 20x20x12 is 3V, 6 panel construction and the frame is gray in color. The Puracell VP and VPX are available in MERV 11, 13, 14 and 15 performances. The Puracell VP is also available in MERV 16 and 99.97% HEPA grade performance.

The Puracell VP and VPX Series utilize multiple mini-pleat packs which allow low resistance to air flow and long service life. The media shall be water resistant, inorganic, wet laid glass microfiber which does not support the growth of bacteria or mold. The Puracell VP and VPX media packs are constructed by pleating a continuous sheet of media. The pleats are separated by a uniform glue bead that produces low pressure drop while maximizing the filtration area. The media packs are completely sealed and bonded within the heavyduty framework. The filters shall be rated to withstand temperatures up to 180 degrees Fahrenheit.

Efficiency	60-65%	80-85%	90-95%	98%	-	99.97%
MERV	11	13	14	15	16	-



"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. glasfloss.com · (214) 741-7056 PRODUCT BULLETIN 12PURVP · SECTION 12 · 2-15-21



Puracell VP/VPX

BASE MODEL NUMBER	SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	INITIAL RESIST. IN. W.G		MEI SQUA FEI	ARE ET	SIZE W x H x D NOM. MM		
				VP	VPX	VP	VPX			
	MERV 11 - 60-65% EFFICIENCY									
2424B1	24 x 24 x 12	23-3/8" x 23-3/8" x 11-1/2"	500	.26	.33	205.70	97.76	610 x 610 x 305		
2420B1	24 x 20 x 12	23-3/8" x 19-3/8" x 11-1/2"	500	.26	.33	168.10	79.68	610 x 508 x 305		
2412B1	24 x 12 x 12	23-3/8" x 11-3/8" x 11-1/2"	500	.26	.33	91.79	43.51	610 x 305 x 305		
2020B1*	20 x 20 x 12	19-3/8" x 19-3/8" x 11-1/2"	500	.26	-	121.92	-	508 x 508 x 305		
		Μ	ERV 13 - 80-	85% EFFIC	CIENCY					
2424B2	24 x 24 x 12	23-3/8" x 23-3/8" x 11-1/2"	500	.29	.41	205.70	97.76	610 x 610 x 305		
2420B2	24 x 20 x 12	23-3/8" x 19-3/8" x 11-1/2"	500	.29	.41	168.10	79.68	610 x 508 x 305		
2412B2	24 x 12 x 12	23-3/8" x 11-3/8" x 11-1/2"	500	.29	.41	91.79	43.51	610 x 305 x 305		
2020B2*	20 x 20 x 12	19-3/8" x 19-3/8" x 11-1/2"	500	.29	-	121.92	-	508 x 508 x 305		
		M	ERV 14 - 90-	95% EFFIC	IENCY					
2424B3	24 x 24 x 12	23-3/8" x 23-3/8" x 11-1/2"	500	.32	.45	205.70	103.98	610 x 610 x 305		
2420B3	24 x 20 x 12	23-3/8" x 19-3/8" x 11-1/2"	500	.32	.45	168.10	84.77	610 x 508 x 305		
2412B3	24 x 12 x 12	23-3/8" x 11-3/8" x 11-1/2"	500	.32	.45	91.79	46.34	610 x 305 x 305		
2020B3*	20 x 20 x 12	19-3/8" x 19-3/8" x 11-1/2"	500	.32	-	121.92	-	508 x 508 x 305		
		l	MERV 15 - 9	8% EFFICII	ENCY					
2424B9	24 x 24 x 12	23-3/8" x 23-3/8" x 11-1/2"	500	.33	.49	205.70	103.98	610 x 610 x 305		
2420B9	24 x 20 x 12	23-3/8" x 19-3/8" x 11-1/2"	500	33	.49	168.10	84.77	610 x 508 x 305		
2412B9	24 x 12 x 12	23-3/8" x 11-3/8" x 11-1/2"	500	.33	.49	91.79	46.34	610 x 305 x 305		
2020B9*	20 x 20 x 12	19-3/8" x 19-3/8" x 11-1/2"	500	.33	-	121.92	-	508 x 508 x 305		
			MERV 16 - 9	5% @ .3 mi	icrons					
23F23FB4	24 x 24 x 12	23-3/8" x 23-3/8" x 11-1/2"	500	.78	-	205.70	_	610 x 610 x 305		
23F19FB4	24 x 20 x 12	23-3/8" x 19-3/8" x 11-1/2"	500	.78	-	168.10	-	610 x 508 x 305		
23F11FB4	24 x 12 x 12	23-3/8" x 11-3/8" x 11-1/2"	500	.78	-	91.79	-	610 x 305 x 305		
			99.97 <u>%</u> (a.3 micron	IS					
23F23FB5	24 x 24 x 12	23-3/8" x 23-3/8" x 11-1/2"	275	1.0	-	205.70	_	610 x 610 x 305		
23F19FB5	24 x 20 x 12	23-3/8" x 19-3/8" x 11-1/2"	275	1.0	-	168.10	-	610 x 508 x 305		
23F11FB5	24 x 12 x 12	23-3/8" x 11-3/8" x 11-1/2"	275	1.0	-	91.79	-	610 x 305 x 305		

* Puracell 20x20x12 is 3V, 6 panel construction and the frame is gray in color.


Tolerances shall be +/- 1/16" for height and width. The frame depth shall be 11-1/2" +/- 1/8". Performance values based on ASHRAE and in-house testing methods. Recommended Final Resistance: VP=2.0" in w.g., VPX=1.5" in w.g.

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.


glasfloss.com (214) 741-7056




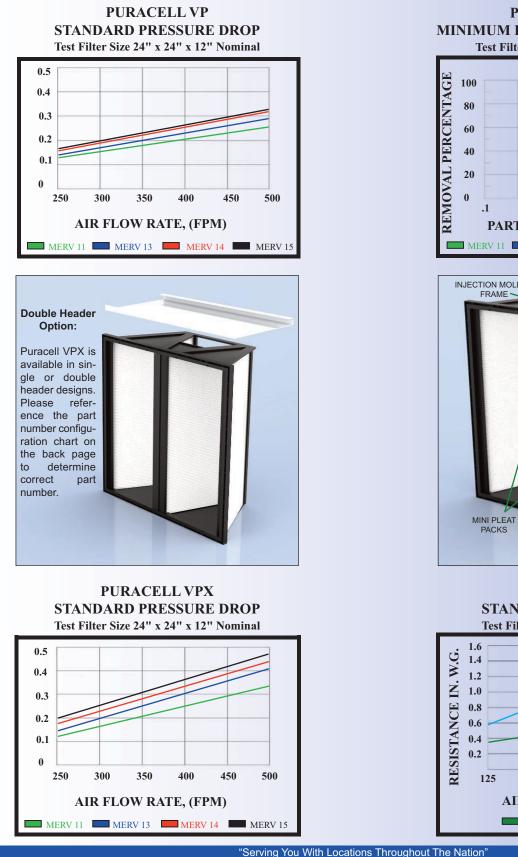


Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. glasfloss.com · (214) 741-7056

PURACELL VP/VPX MINIMUM PARTICLE SIZE EFFICIENCY Test Filter Size 24" x 24" x 12" Nominal





PURACELL VP STANDARD PRESSURE DROP Test Filter Size 24" x 24" x 12" Nominal



Glasfloss

THE CLEAR CHOICE SINCE 1936

	,	
	Glasfloss Puracell VP	Traditional Rigid Cell
MERV Rating	14	14
Initial Resistance (in. w.g)	0.32	0.68
*Recommended Final Resistance (in. w.g.)	2.0	1.5
**Fan/Motor/Drive Efficiency (%)	58.00%	58.00%
***Energy Consumption (kWh)	2649	3876
Annual CO2 Emissions (lbs)	3581	5240
Annual Energy Cost (\$.08/kWh)	\$212.00	\$310.00

Energy Savings & Environmental Impact Comparison


* VP pressure drop estimated at 1.17 in. w.g. after 12 months


** Fan/Motor/Drive Efficiency estimated & averaged at 58%

*** Kilowatt cost estimated at \$.08/kWh

Glasfloss Puracell VP = \$98.00 energy savings per filter or annually 31.7% savings per this comparison.

PART NUMBER CONFIGURATION FOR VP & VPX

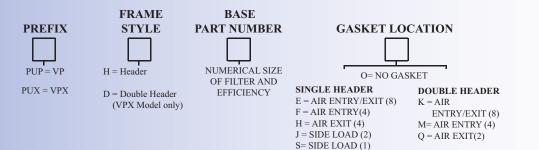


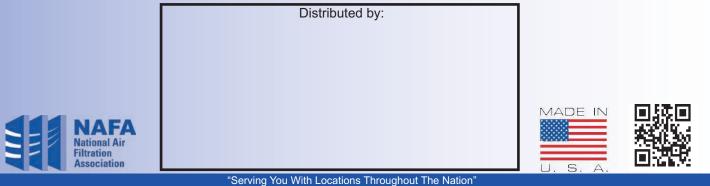

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

glasfloss.com · (214) 741-7056



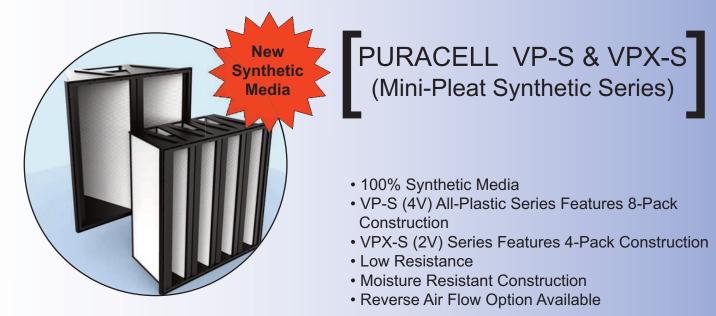



The Glasfloss Puracell VP-S (4V) and VPX-S (2V) all-plastic frame extended surface mini-pleat filters offer high efficiency particulate removal, extended service life and extremely low resistance to air flow. The Puracell VP-S and VPX-S plastic frame filters incorporate a lightweight, high-impact polystyrene framework for strength and durability in demanding commercial and industrial applications, and offer high efficiency and low resistance to airflow. When compared to traditional rigid cell and traditional box style filters, the Puracell VP-S and VPX-S minipleat series offer superior performance, lower operating costs and significant energy savings. Puracell 20x20x12 is 3V, 6 panel construction and the frame is gray in color. The Puracell VP-S and VPX-S are available in MERV 11, 13 and 15 performances.

INJECTION MOLDER

The Puracell VP-S and VPX-S Series utilize multiple mini-pleat packs which allow low resistance to air flow and long service life. The media shall be water resistant, inorganic, moisture-resistant synthetic media which does not support the growth of bacteria or mold. The Puracell VP-S and VPX-S media packs are constructed by pleating a continuous sheet of media. The pleats are separated by a uniform glue bead that produces low pressure drop while maximizing the filtration area. The media packs are completely sealed and bonded within the heavy-duty framework. The filters shall be rated to withstand temperatures up to 180 degrees Fahrenheit.

60-65%

11

80-85%


13

98%

15

Efficiency

MERV

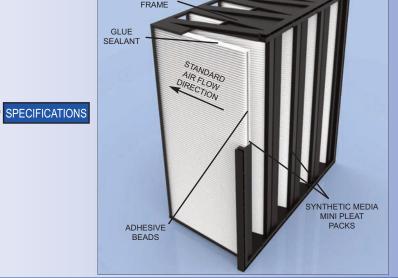

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com · (214) 741-7056 PRODUCT BULLETIN 12PURVPX • SECTION 12 • 2-15-21




Puracell VP-S / VPX-S 100% Synthetic Media

BASE MODEL NUMBER	SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	INITIAL RESIST. IN. W.G VP-S VPX-S		MEDIA SQUARE FEET VP-S VPX-S		SIZE W x H x D NOM. MM	
		M	ERV 11 - 60-	65% EFFIC	IENCY	ĮL		JIJ	
2424B1 2420B1 2412B1 2020B1*	24 x 24 x 12 24 x 20 x 12 24 x 12 x 12 20 x 20 x 12	23-3/8" x 23-3/8" x 11-1/2" 23-3/8" x 19-3/8" x 11-1/2" 23-3/8" x 11-3/8" x 11-1/2" 19-3/8" x 19-3/8" x 11-1/2"	500 500 500 500	.26 .26 .26 .26	.33 .33 .33 -	146.93 119.80 65.55 89.85	73.46 59.90 32.78	610 x 610 x 305 610 x 508 x 305 610 x 305 x 305 508 x 508 x 305	
		М	ERV 13 - 80-	85% EFFIC	IENCY				
2424B2 2420B2 2412B2 2020B2*	24 x 24 x 12 24 x 20 x 12 24 x 12 x 12 20 x 20 x 12	23-3/8" x 23-3/8" x 11-1/2" 23-3/8" x 19-3/8" x 11-1/2" 23-3/8" x 11-3/8" x 11-1/2" 19-3/8" x 19-3/8" x 11-1/2"	500 500 500 500	.27 .27 .27 .27	.35 .35 .35 -	146.93 119.80 65.55 89.85	73.46 59.90 32.78	610 x 610 x 305 610 x 508 x 305 610 x 305 x 305 508 x 508 x 305	
	MERV 15 - 98% EFFICIENCY								
2424B9 2420B9 2412B9 2020B9*	24 x 24 x 12 24 x 20 x 12 24 x 12 x 12 20 x 20 x 12	23-3/8" x 23-3/8" x 11-1/2" 23-3/8" x 19-3/8" x 11-1/2" 23-3/8" x 11-3/8" x 11-1/2" 19-3/8" x 19-3/8" x 11-1/2"	500 500 500 500	.29 .29 .29 .29	.37 .37 .37 -	146.93 119.80 65.55 89.85	73.46 59.90 32.78	610 x 610 x 305 610 x 508 x 305 610 x 305 x 305 508 x 508 x 305	


* Puracell 20x20x12 is 3V, 6 panel construction and the frame is gray in color

Tolerances shall be +/- 1/16" for height, width and depth. The frame depth shall 11-1/2" +/- 1/8". Performance values based on ASHRAE and in-house testing methods. Recommended Final Resistance: VP-S=2.0" in w.g., VPX-S=1.5" in w.g.

PURACELL VP-S STANDARD PRESSURE DROP Test Filter Size 24" x 24" x 12" Nominal



PURACELL VP-S MINIMUM PARTICLE SIZE EFFICIENCY Test Filter Size 24" x 24" x 12" Nominal





"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

www.glasfloss.com · (214) 741-7056







PART NUMBER CONFIGURATION FOR VP-S & VPX-S




PUXS = VPXS

FRAME STYLE	
H = Header	

BASE PART NUMBER

NUMERICAL SIZE OF FILTER AND EFFICIENCY






SINGLE HEADER E = AIR ENTRY/EXIT (8) F = AIR ENTRY(4)H = AIR EXIT (4)J = SIDE LOAD(2)S = SIDE LOAD(1)

REVERSE AIR FLOW



(leave blank for standard air flow)



"Serving You With Locations Throughout The Nation"

Glasfloss

THE CLEAR CHOICE SINCE 1936

Energy Savings & Environmental Impact Comparison

	Glasfloss Puracell VP-S	Traditional Rigid Cell
MERV Rating	15	14
Initial Resistance (in. w.g)	0.29	0.68
*Recommended Final Resistance (in. w.g.)	2.0	1.5
**Fan/Motor/Drive Efficiency (%)	58.00%	58.00%
***Energy Consumption (kWh)	2548	3876
Annual CO2 Emissions (lbs)	3440	5240
Annual Energy Cost (\$.08/kWh)	\$203.84	\$310.00

* VP-S pressure drop estimated at 1.15 in. w.g. after 12 months

- ** Fan/Motor/Drive Efficiency estimated & averaged at 58%
- *** Kilowatt cost estimated at \$.08/kWh

Glasfloss Puracell VP-S = \$106.16 energy savings per filter or annually 34.2% savings per this comparison.



Distributed by:




"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

www.glasfloss.com (214) 741-7056




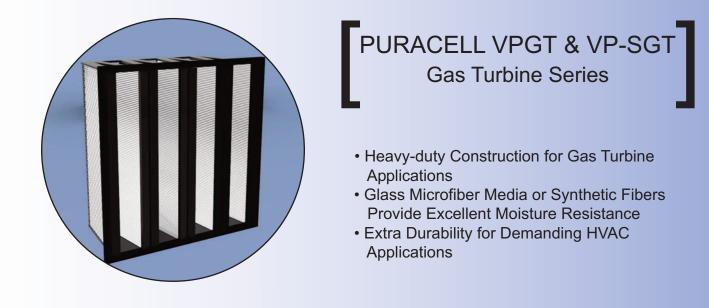



Glasfloss Puracell VPGT & VP-SGT filters are designed to withstand the rigors of a gas turbine engine, centrifugal compressor and other high velocity applications. Heavy-duty face grills and additional media pack reinforcements ensure the integrity of the filters under the most demanding conditions. Glasfloss GT filters are available in MERV 14 and MERV 15 ASHRAE performance.

The Glasfloss Puracell GT all plastic frame utilizes multiple mini-pleat packs which allow low resistance to air flow and long service life. The media shall be constructed of a water resistant, inorganic glass microfiber (or synthetic fibers). The media pack shall consist of a continuous sheet of the pleated media that is separated by a uniform glue bead which produces low pressure drop while maximizing the filtration area. A 1/4" neoprene thick gasket shall be applied on the filter. An expanded metal face guard is installed on the air leaving side of the frame to insure filter integrity and increase rigidity. The expanded metal shall be galvanized to resist rust and corrosion. The filter shall be rated to withstand temperatures up to 180 degrees Fahrenheit. The VPGT shall withstand up to 23 in. w.g. and the VP-SGT shall withstand up to 25 in. w.g. in an "Air Filter Breaching Test." Puracell GT Series shall have MERV 14 performance on VPGT and MERV 15 performance on VP-SGT.

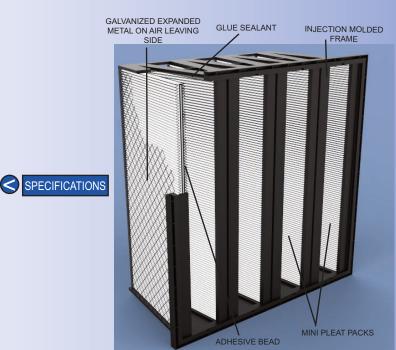

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com (214) 741-7056 PRODUCT BULLETIN 12-VPGT • SECTION 12 • 7-3-19



PURACELL VPGT MERV 14


	SIZE H x W x D NOMINAL		RATED VELOCITY FPM	RESIST.	MEDIA SQUARE FEET	SIZE H x W x D NOMINAL MM	RATED VELOCITY M/H	INITIAL RESIST. PASCALS
PUPH2412B3H1 PUPH2424B3H1		23-3/8 x 11-3/8 x 11-1/2 23-3/8 x 23-3/8 x 11-1/2		.33 .33	85.15 191.32	610 x 305 x 305 610 x 610 x 305	9150 9150	82.12 82.12

PURACELL VP-SGT MERV 15

								()
PUPSH2412B9H1	24 x 12 x 12	23-3/8 x 11-3/8 x 11-1/2	500	.29	65.55	610 x 305 x 305	9150	72.16
PUPSH2424B9H1	24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2	500	.29	146.93	610 x 610 x 305	9150	72.16

Tolerances shall be +/- 1/16" for height, width and depth. Performance values based on ASHRAE and in-house testing methods.


STANDARD PRESSURE DROP Test Filter Size 24" x 24" x 12" Nominal




MADE

S

MINIMUM PARTICLE SIZE EFFICIENCY






	Distributed by:	
N		
N.		

"Serving You With Locations Throughout The Nation"




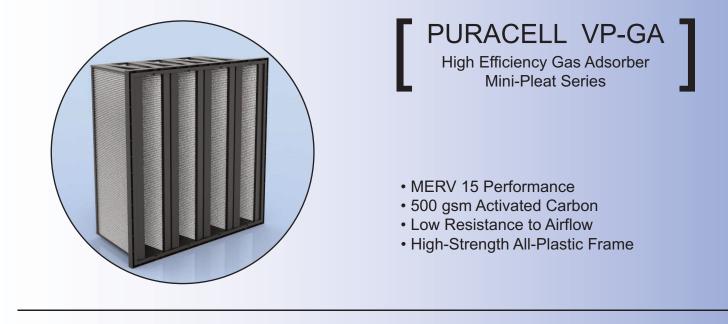



The Glasfloss Puracell VP-GA is designed for high efficiency particulate filtration applications and incorporates 500 grams per square meter of activated carbon to remove a multitude of odors and VOCs. Compact dual media design allows for convenient installation in many HVAC applications.

The Glasfloss Puracell VP-GA shall be made of high-impact strength, all plastic frame design. The media pack shall be bonded to the frame utilizing a moisture resistant adhesive for continuous seal. The multiple 4-V engineered design and precision pleating maximizes airflow and service life. The first stage particulate MERV 15 media shall be 100% synthetic fibers that do not support microbial growth. The second stage activated carbon shall incorporate 500 grams per square meter that maximizes the surface area for high removal of various odors and VOCs. A 1/4"-thick closed cell neoprene gasket is optional. Maximum operating temperature up to 140 degrees Fahrenheit.

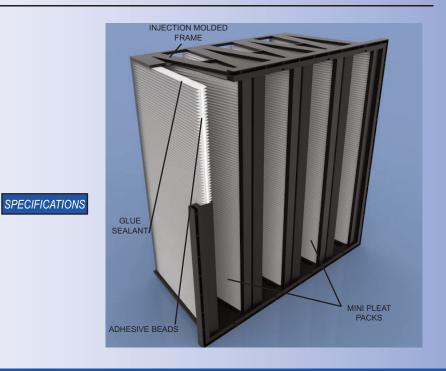


"Serving You With Locations Throughout The Nation"




Puracell VP-GA


BASE MODEL NUMBER	SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOCITY FPM	INITIAL RESIST. IN. W.G.	MEDIA SQUARE FEET	SIZE W x H x D NOM. MM		
	MERV 15 - 98% EFFICIENCY							
2424B9	24 x 24 x 12	23-3/8" x 23-3/8" x 11-1/2"	500	.42	68.8	610 x 610 x 305		
2420B9	24 x 20 x 12	23-3/8" x 19-3/8" x 11-1/2"	500	.42	55.2	610 x 508 x 305		
2412B9	24 x 12 x 12	23-3/8" x 11-3/8" x 11-1/2"	500	.42	30.4	610 x 305 x 305		

Tolerances shall be +/- 1/16" for height and width. The frame depth shall be 11-1/2" +/- 1/8". Performance values based on ASHRAE and in-house testing methods. Recommended Final Resistance: 1.5" in w.g.



PURACELL VP-GA MINIMUM PARTICLE SIZE EFFICIENCY Test Filter Size 24" x 24" x 12" Nominal






"Serving You With Locations Throughout The Nation"


Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

glasfloss.com (214) 741-7056

Glasfloss

THE CLEAR CHOICE SINCE 1936



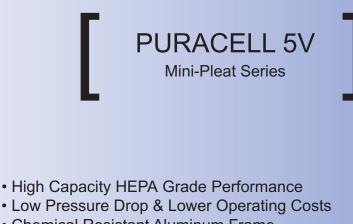


- Chemical Resistant Aluminum Frame
- Moisture Resistant Construction



The Glasfloss Puracell 5V mini-pleat series offers HEPA grade performance, extremely low resistance to air flow and extended service life. The chemical resistant aluminum framework provides exceptional strength. The Glasfloss Puracell 5V mini-pleat series are produced in MERV 16 and 99.99% @ .30 micron size performance ranges and are available in exact or nominal standard sizes.

The Puracell 5V shall utilize mini-pleat packs which allow low resistance to air flow and long service life. The media shall be water resistant, inorganic, wet laid microfiber. The Puracell 5V media packs are constructed by pleating a continuous sheet of media. The pleats are separated by a uniform glue bead that maximizes the filtration area and produces low pressure drop. The media packs are resistant to moisture and do not support the growth of bacteria SPECIFICATIONS and mold. The media packs are completely sealed using a fire-retarding, rubber base, two-part sealant within the aluminum framework. A neoprene gasket is standard on one side for MERV 16 and 99.99% Puracell 5V. Puracell 5V 99.99% filters are tested for leaks based on a near-monodispersesd .30 micron size particle. The filters shall be rated to withstand temperatures up to 180 degrees Fahrenheit. Recommended final pressure drop for the Puracell 5V is 2.0" w.g.

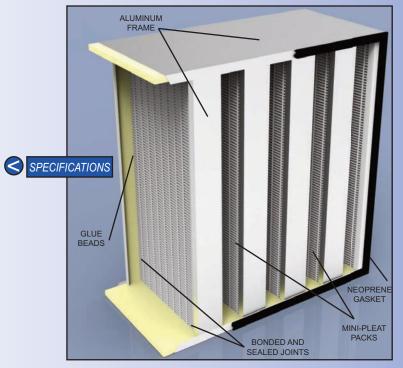

"Serving You With Locations Throughout The Nation"


Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice. www.glasfloss.com • (214) 741-7056 PRODUCT BULLETIN 12 PURV • SECTION 12 • 3-1-21

Puracell 5V


BASE MODEL NUMBER	SIZE H x W x D NOMINAL (INCHES)	SIZE H x W x D EXACT (INCHES)	RATED VELOCITY FPM	INITIAL RESIST. IN. W.G	MEDIA SQUARE FEET	SIZE H x W x D NOM. MM		
			MERV	16				
			EXACT SIZ	ZE				
2424B4	24 x 24 x 12	24 x 24 x 11-1/2	600	.80	401.19	610 x 610 x 305		
2420B4	24 x 20 x 12	24 x 20 x 11-1/2	600	.80	320.95	610 x 508 x 305		
2412B4	24 x 12 x 12	24 x 12 x 11-1/2	600	.80	200.59	610 x 305 x 305		
			UNDERSIZ	ED				
23F23FB4	24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2	600	.80	389.99	594 x 594 x 305		
23F19FB4	24 x 20 x 12	23-3/8 x 19-3/8 x 11-1/2	600	.80	311.99	594 x 492 x 305		
23F11FB4	24 x 12 x 12	23-3/8 x 11-3/8 x 11-1/2	600	.80	194.99	594 x 289 x 305		
99.99% EXACT SIZE								
2424B6	24 x 24 x 12	24 x 24 x 11-1/2	600	1.00	401.19	610 x 610 x 305		
2420B6	24 x 20 x 12	24 x 20 x 11-1/2	600	1.00	320.95	610 x 508 x 305		
2412B6	24 x 12 x 12	24 x 12 x 11-1/2	600	1.00	200.59	610 x 305 x 305		
			UNDERSIZ	ED				
23F23FB6	24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2	600	1.00	389.99	594 x 594 x 305		
23F19FB6	24 x 20 x 12	23-3/8 x 19-3/8 x 11-1/2	600	1.00	311.99	594 x 492 x 305		
23F11FB6	24 x 12 x 12	23-3/8 x 11-3/8 x 11-1/2	600	1.00	194.99	594 x 289 x 305		

Tolerances shall be +/- 1/16" for height, width and depth. The frame depth shall not exceed 11-1/2". Performance values based on ASHRAE and in-house testing methods. Recommended final resistance: Puracell 5V @ 2.0"


PURACELL 5V STANDARD PRESSURE DROP Test Filter Size 24" x 24" x 12" Nominal



PURACELL 5V MINIMUM PARTICLE SIZE EFFICIENCY Test Filter Size 24" x 24" x 12" Nominal



PART NUMBER CONFIGURATION FOR PURACELL 5V

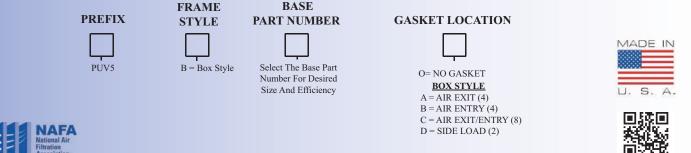

"Serving You With Locations Throughout The Nation"